





|                  |                     |               |            |
|------------------|---------------------|---------------|------------|
| 发行版本<br>Revision | 修改内容<br>Description | 制图<br>Drawing | 日期<br>Date |
| A                | First release       | Riky          | 2025.03.29 |

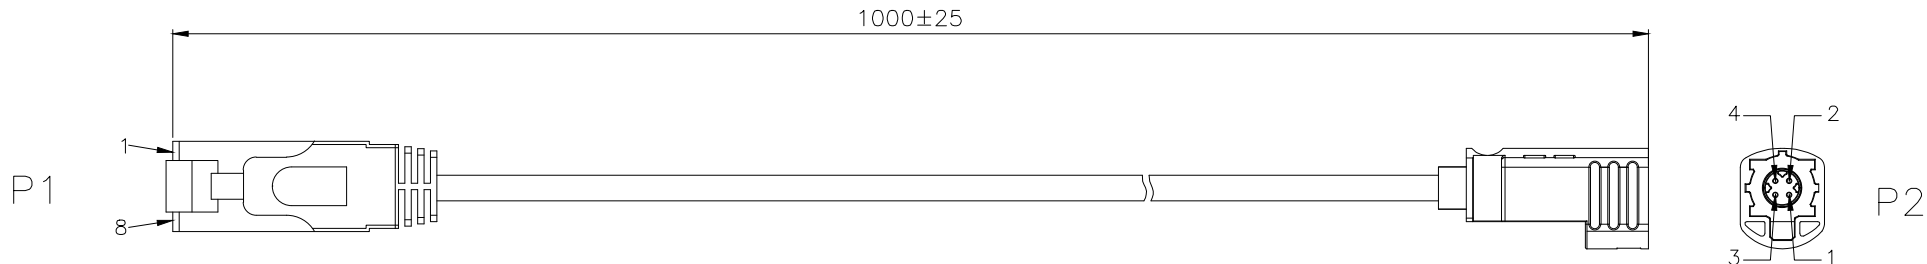

ELECTRICAL TEST CONDITION:  
(a).100% OPEN,SHORT & MISWIRE TEST,  
(b).INSULATOR RESISTANCE:20 MOHM MIN.  
DC 300V 0.01 SEC  
(c).CONTACT RESISTANCE:3 OHM MAX.

CONNECTOR P1      CONNECTOR P2



|      |                            |     |      |
|------|----------------------------|-----|------|
| 3    | HSD 4P MALE                | 1   | SET  |
| 2    | RJ45 8P8C PLUG             | 1   | SET  |
| 1    | CAT 5E CABLE OD4.5mm BLACK | /   | MM   |
| ITEM | DESCRIPTION                | QTY | UNIT |

|                                    |       |            |               |                |            |                                         |            |            |
|------------------------------------|-------|------------|---------------|----------------|------------|-----------------------------------------|------------|------------|
| 仁昊伟业<br>RENHOTECH                  |       |            |               |                |            | RENHOTECH GROUP                         |            |            |
| 客户料号<br>Cus'P/N                    |       | 料号<br>P/N  | RHT-605-20840 |                | 品名<br>Name | HSD Z Male to RJ45 Male Extension Cable |            |            |
| 未注公差<br>Unless Otherwise Specified |       | 单位<br>Unit | mm            | 版本<br>Revision | A          | 图纸确认<br>APPROVAL                        | 日期<br>Date |            |
| 线性<br>Linear                       | 0.5~6 | ±0.2       | 比例<br>Scale   | 页码<br>Page     | 1 / 1      | 绘图<br>Drawing                           | Riky       | 2025.03.29 |
|                                    | >6~30 | ±0.3       |               |                |            | 审核<br>Checked                           | Jason      | 2025.03.29 |
|                                    | >30   | ±2%        |               |                |            | 客户确认<br>Customer Approved               |            |            |
| 角度<br>Angles                       | ±3°   |            |               |                |            | Third Angle Projection                  |            |            |