




Wire-to-Board Shielded Vertical 12 Position Board Mount C Code 2 mm (.07 in) Centerline Signal Data Connectivity Headers

Part Number:

**RHT-2390045-3**

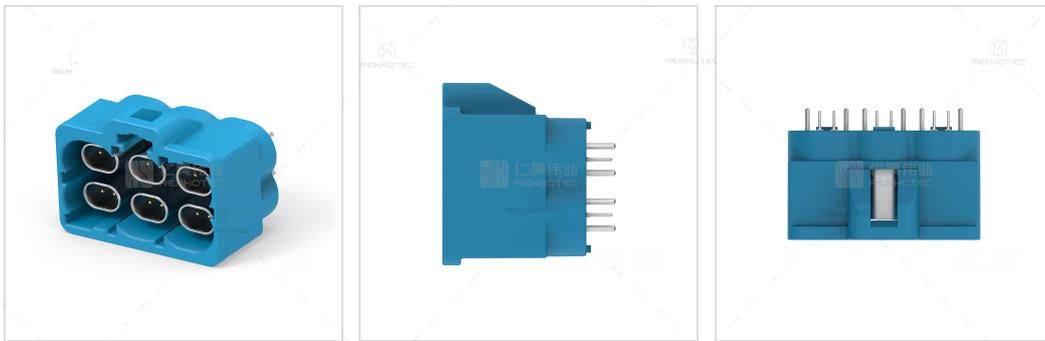

### Basic Information

Tcpn	2390045-3
Product Description	6POS,PIN DIA 0.6,HDR ASSY,180DEG
Connector System	Wire-to-Board
Number of Rows	2
PCB Mount Orientation	Vertical
Number of Positions	12
Keying Code	C
Connector Mounting Type	Board Mount

### Electrical Specification

Connector & Contact Terminates To	Printed Circuit Board
Contact Current Rating (Max) (A)	2
Termination Method to PCB	Through Hole - Solder
Circuit Application	Signal

**Environmental Specification**

Sealable	No
Shielded	Yes
Operating Temperature (Max)	105 °C ( 221 °F )
Operating Temperature Range	-40 - 105 °C ( -40 - 221 °F )

**Material Specification**

Contact Mating Plating	Gold (Au)
Housing Color	Light Blue
Outer Contact Plating	Gold (Au)

**Mechanical Specification**

Mating Pin Diameter	.5 mm ( .02 in )
Centerline (Pitch)	2 mm ( .07 in )

**Disclaimer**

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.