
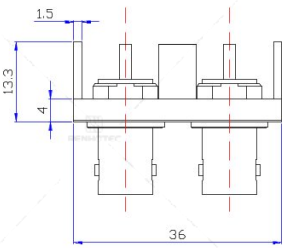

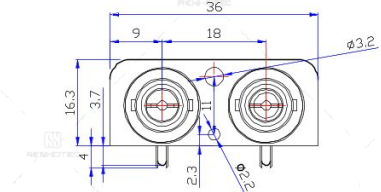


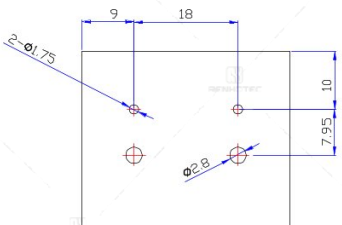





BNC Connector Right Angle Jack Female Pin PCB Mount Through Hole 50 Ohm - RHT-610-0004



Drawing

1	2	3	4	5	6																																									
			<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>Product NO.</td> <td colspan="5">Renhotec-610-0004</td> </tr> <tr> <td>REV</td> <td>DESCRIPTION</td> <td>DWN</td> <td>DATE</td> <td colspan="2">APPROVEN</td> </tr> <tr> <td>A</td> <td>First Issue</td> <td>Mr. Wang</td> <td>2016/3/02</td> <td colspan="2">John kine</td> </tr> </table>			Product NO.	Renhotec-610-0004					REV	DESCRIPTION	DWN	DATE	APPROVEN		A	First Issue	Mr. Wang	2016/3/02	John kine																								
Product NO.	Renhotec-610-0004																																													
REV	DESCRIPTION	DWN	DATE	APPROVEN																																										
A	First Issue	Mr. Wang	2016/3/02	John kine																																										
A																																														
B				 <p style="text-align: center;">PCB</p>																																										
C	<p>Specification: Impedance: 50 Ohms VSWR:1.3MAX Frequency range:DC~4G Working Voltage:500V rms @ sea level Insulation resistance:5000 Ohms min Temperature range:-55℃ TO +155℃ Relative temperature:≤95%(40° C±2° C) Drawings products are in line with ROHS standards .</p>																																													
D	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td colspan="5" style="text-align: center;">NOTE:</td> </tr> <tr> <td>6</td> <td>Insulator</td> <td>POM</td> <td></td> <td>2</td> </tr> <tr> <td>5</td> <td>Solder column</td> <td>Iron</td> <td>NICKEL</td> <td>2</td> </tr> <tr> <td>4</td> <td>IRON PLATES</td> <td>Iron</td> <td>NICKEL</td> <td>1</td> </tr> <tr> <td>3</td> <td>PANEL</td> <td>ABS</td> <td>BLACK</td> <td>1</td> </tr> <tr> <td>2</td> <td>PIN</td> <td>BRASS</td> <td>NICKEL</td> <td>2</td> </tr> <tr> <td>1</td> <td>BODY</td> <td>ZINC</td> <td>NICKEL</td> <td>2</td> </tr> <tr> <td>NO</td> <td>DESCRIPTION</td> <td>MATERIAL</td> <td>FINISH</td> <td>QTY</td> </tr> </table>					NOTE:					6	Insulator	POM		2	5	Solder column	Iron	NICKEL	2	4	IRON PLATES	Iron	NICKEL	1	3	PANEL	ABS	BLACK	1	2	PIN	BRASS	NICKEL	2	1	BODY	ZINC	NICKEL	2	NO	DESCRIPTION	MATERIAL	FINISH	QTY	
NOTE:																																														
6	Insulator	POM		2																																										
5	Solder column	Iron	NICKEL	2																																										
4	IRON PLATES	Iron	NICKEL	1																																										
3	PANEL	ABS	BLACK	1																																										
2	PIN	BRASS	NICKEL	2																																										
1	BODY	ZINC	NICKEL	2																																										
NO	DESCRIPTION	MATERIAL	FINISH	QTY																																										
E	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>DRAWN</td> <td>Zelin. Zhang</td> <td>2016/03/02</td> </tr> <tr> <td>CHECKED</td> <td></td> <td></td> </tr> <tr> <td>APPROVALS</td> <td>John Kine</td> <td>09.03.2016</td> </tr> </table>		DRAWN	Zelin. Zhang	2016/03/02	CHECKED			APPROVALS	John Kine	09.03.2016	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>Tolerance</td> <td>0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°</td> </tr> <tr> <td>View</td> <td></td> </tr> <tr> <td>UNIT</td> <td>MM</td> </tr> <tr> <td>SCALE</td> <td>1:1</td> </tr> </table>	Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	View		UNIT	MM	SCALE	1:1	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2" style="text-align: center;">RENHOTEC www.renhotec.com</td> <td colspan="2" style="text-align: center;">RENHOTEC GROUP</td> </tr> <tr> <td colspan="4" style="text-align: center;">Name: BNC 1x2 CONNECTOR</td> </tr> <tr> <td>SIZE</td> <td>Product NO.</td> <td>RENHOTEC-610-0004</td> <td>REV</td> </tr> <tr> <td>A</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Date/Time</td> <td>CAD FILE</td> <td>D/company drawings/BD</td> <td>SHEET: 1 OF 1</td> </tr> <tr> <td>2016/3/02</td> <td></td> <td></td> <td></td> </tr> </table>		RENHOTEC www.renhotec.com		RENHOTEC GROUP		Name: BNC 1x2 CONNECTOR				SIZE	Product NO.	RENHOTEC-610-0004	REV	A				Date/Time	CAD FILE	D/company drawings/BD	SHEET: 1 OF 1	2016/3/02			
DRAWN	Zelin. Zhang	2016/03/02																																												
CHECKED																																														
APPROVALS	John Kine	09.03.2016																																												
Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°																																													
View																																														
UNIT	MM																																													
SCALE	1:1																																													
RENHOTEC www.renhotec.com		RENHOTEC GROUP																																												
Name: BNC 1x2 CONNECTOR																																														
SIZE	Product NO.	RENHOTEC-610-0004	REV																																											
A																																														
Date/Time	CAD FILE	D/company drawings/BD	SHEET: 1 OF 1																																											
2016/3/02																																														
1	2	3	4	5	6																																									

Basic Information

Connector Type	Jack
Contact Type	Female Pin
Fastening Type	Bayonet
Mounting Feature	Through Hole
Mounting Type	PCB Mount
Number of Ports	2
Orientation	Right Angle
RF Series	BNC Type

Electrical Specification

Dielectric Withstanding Voltage	1500 V rms
Frequency Range	0-4 GHz for 50 ohm
Impedance	50 ohm

Environmental Specification

Temperature Range	POM -40°C~+60°C, Teflon -55°C~+155°C
--------------------------	--------------------------------------

Mechanical Specification

Mating Durability	≥ 500 Cycles
--------------------------	--------------

Material and Finish


Component Description	Material	Finish
Shell	Zinc Alloy	Nickel Plated
Insulator	Teflon White	
Center Contact	Copper Alloy	Gold Plated

Impedance Testing

Impedance	50 ohm
-----------	--------

Frequency & VSWR Test Report

Frequency Range	0-4 GHz for 50 ohm
VSWR	R/A type $\leq 1.30/3\text{GHz}$, Straight type $\leq 1.22/3\text{GHz}$

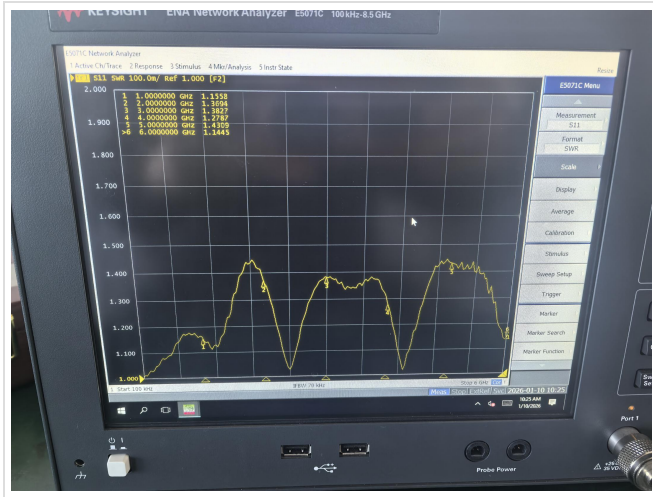

Contact Resistance Test

Contact Type	Female Pin
Center Contact Resistance	$\leq 1.5 \text{ M}\Omega$ (Milliohms Max.)
Outer Contact Resistance	$\leq 2.0 \text{ M}\Omega$ (Milliohms Max.)



Working Voltage & Insulation Resistance Test

Working Voltage	500 V rms
Insulation Resistance	$\geq 5 \times 10^3 M\Omega$ (Megohms MIN.)



Version History

REV	Date	Revise Contents	Drafter	Approver
A.0	2026.3.23	The initial formulation	Marcella	Joson

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.