


BNC Connector R/A Female Panel Mount Bulkhead 75 Ohm - RHT-610-0034



Drawing

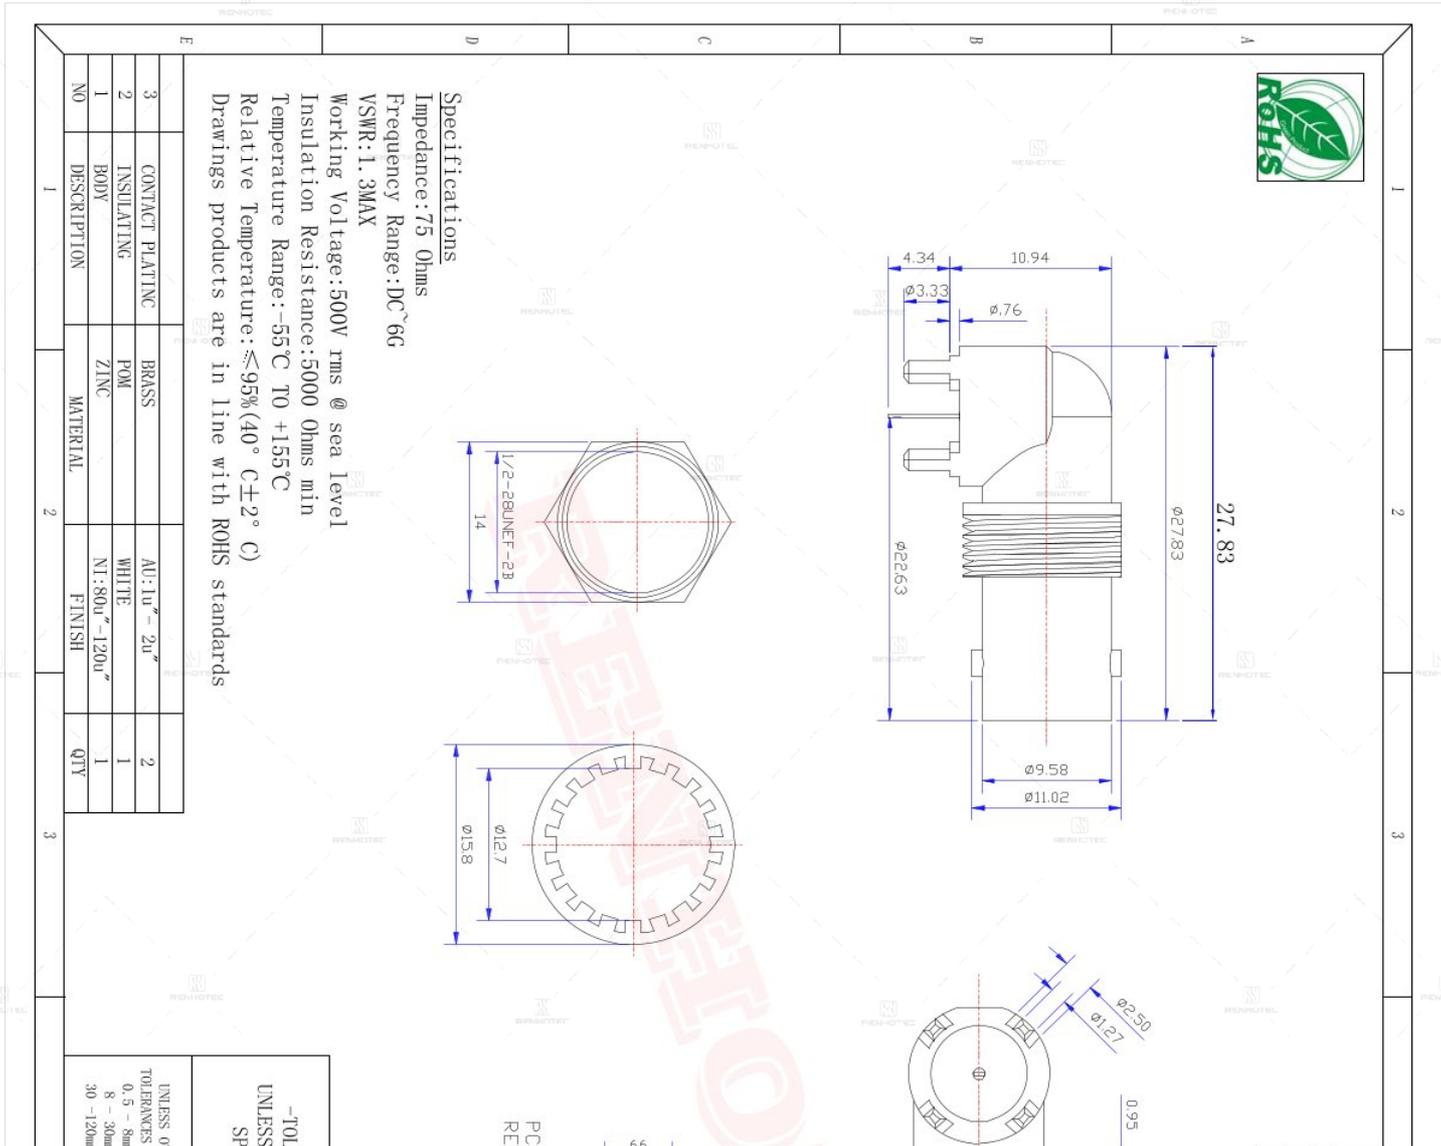

Environmental Specification

Temperature Range POM -40°C~+60°C, Teflon -55°C~+155°C

Mechanical Specification

Mating Durability ≥ 500 Cycles

Material and Finish

Component Description	Material	Finish
Shell	Zinc Alloy	Nickel Plated
Insulator	Teflon White	
Center Contact	Copper Alloy	Gold Plated


Impedance Testing

Impedance 75 ohm

Frequency & VSWR Test Report

Frequency Range 0-4 GHz for 50 ohm

VSWR R/A type ≤ 1.30/3GHz, Straight type ≤ 1.22/3GHz

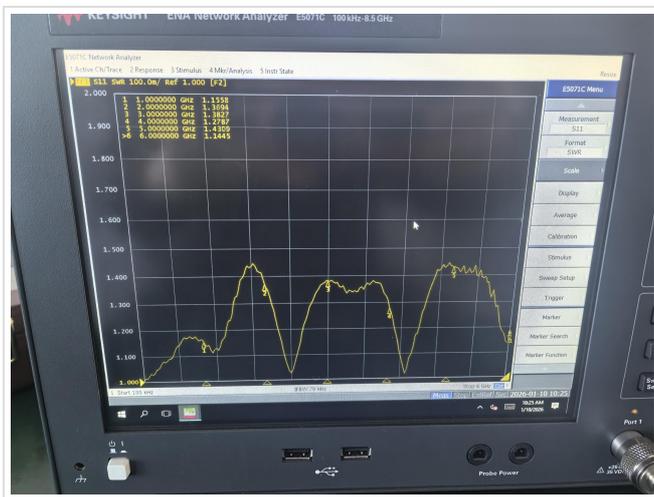

Contact Resistance Test

Contact Type	Female Pin
Center Contact Resistance	≅ 1.5 MΩ (Milliohms Max.)
Outer Contact Resistance	≅ 2.0 MΩ (Milliohms Max.)



Working Voltage & Insulation Resistance Test

Working Voltage	500 V rms
Insulation Resistance	≥5 × 10 ⁹ MΩ (Megohms MIN.)



Version History

REV	Date	Revise Contents	Drafter	Approver
A.0	2026.3.23	The initial formulation	Marcella	Joson

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.