
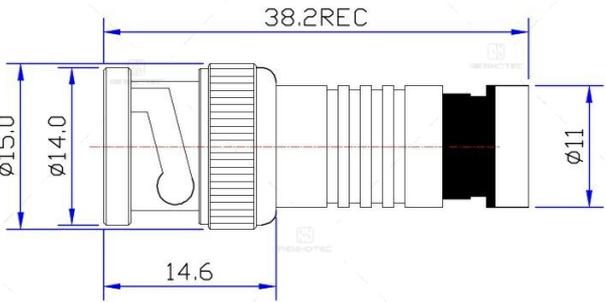


**BNC Connector Straight Male Compression Type RG6 75 Ohm - RHT-610-0074**

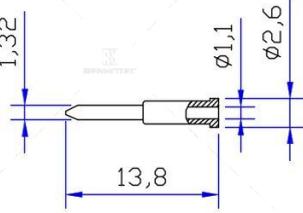

**Drawing**

					<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Product NO.</td> <td colspan="3">Renhotec-610-0074</td> </tr> <tr> <td>REV</td> <td>DESCRIPTION</td> <td>DWN</td> <td>DATE</td> </tr> <tr> <td>A</td> <td>First issue</td> <td>Mr. Wang</td> <td>2016/3/11</td> </tr> <tr> <td></td> <td></td> <td>APPROVEN</td> <td>John kine</td> </tr> </table>			Product NO.	Renhotec-610-0074			REV	DESCRIPTION	DWN	DATE	A	First issue	Mr. Wang	2016/3/11			APPROVEN	John kine
Product NO.	Renhotec-610-0074																						
REV	DESCRIPTION	DWN	DATE																				
A	First issue	Mr. Wang	2016/3/11																				
		APPROVEN	John kine																				
																							
<p><b>Specification:</b>          Impedance: 75. Ohms          VSWR: 1.3MAX          Frequency range: DC~4G          Working Voltage: 500V rms @ sea level          Insulation resistance: 5000 Ohms min          Temperature range: -55°C TO +155°C          Relative temperature: ≤95% (40° C ±2° C)          Drawings products are in line with ROHS standards .</p>																							

### Basic Information

<b>Connector Type</b>	Plug
<b>Contact Type</b>	Male Pin
<b>Fastening Type</b>	Bayonet
<b>Mounting Type</b>	Cable Mount
<b>Number of Ports</b>	1
<b>Orientation</b>	Straight
<b>RF Series</b>	BNC Type
<b>Shield Termination</b>	Compression

### Electrical Specification

<b>Dielectric Withstanding Voltage</b>	1500 V rms
<b>Frequency Range</b>	0-4 GHz for 50 ohm
<b>Impedance</b>	75 ohm

### Environmental Specification

<b>Temperature Range</b>	POM -40°C ~+60°C, Teflon -55°C ~+155°C
--------------------------	--

### Mechanical Specification

<b>Mating Durability</b>	≥ 500 Cycles
--------------------------	--------------

### Material and Finish


Component Description	Material	Finish
Shell	Copper Alloy	Nickel Plated
Insulator	Teflon White	
Center Contact	Copper Alloy	Gold Plated

### Impedance Testing

<b>Impedance</b>	75 ohm
------------------	--------

### Frequency & VSWR Test Report

Frequency Range	0-4 GHz for 50 ohm
VSWR	R/A type $\leq 1.30/3\text{GHz}$ , Straight type $\leq 1.22/3\text{GHz}$

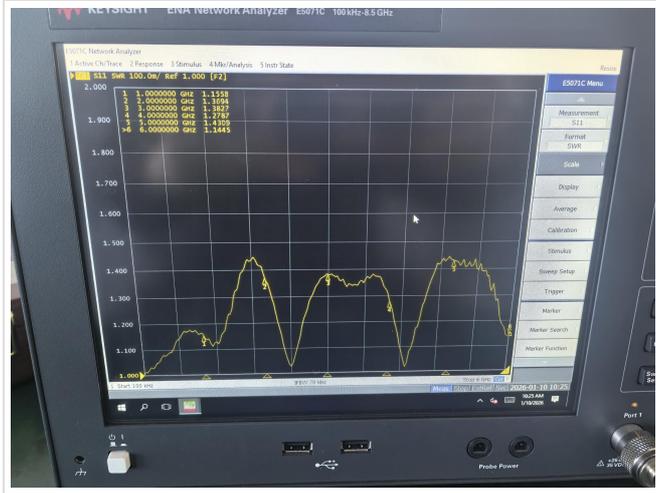

### Contact Resistance Test

Contact Type	Male Pin
Center Contact Resistance	$\leq 1.5 \text{ M}\Omega$ (Milliohms Max.)
Outer Contact Resistance	$\leq 2.0 \text{ M}\Omega$ (Milliohms Max.)
Contact Termination Style	Crimp



### Working Voltage & Insulation Resistance Test

Working Voltage	500 V rms
Insulation Resistance	$\geq 5 \times 10^3 M\Omega$ (Megohms MIN.)



### Version History

REV	Date	Revise Contents	Drafter	Approver
A.0	2026.3.23	The initial formulation	Marcella	Joson

### Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.