
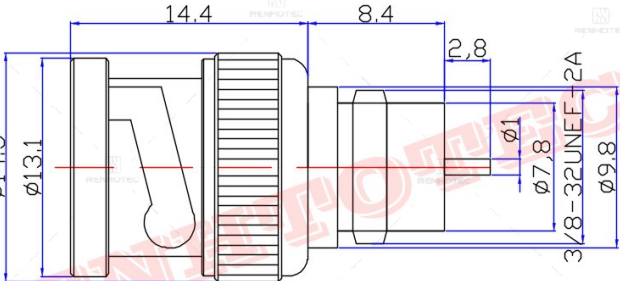








BNC Connector Straight Male Cable Type 50 Ohm - RHT-610-1040



Drawing

			<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Product NO.</td> <td colspan="4">RHT-610-1040</td> </tr> <tr> <td>REV</td> <td>DESCRIPTION</td> <td>DWN</td> <td>DATE</td> <td>APPROVEN</td> </tr> <tr> <td>A</td> <td>First issue</td> <td>Mr. chen</td> <td>2016/03/17</td> <td>John kine</td> </tr> </table>			Product NO.	RHT-610-1040				REV	DESCRIPTION	DWN	DATE	APPROVEN	A	First issue	Mr. chen	2016/03/17	John kine																																													
Product NO.	RHT-610-1040																																																																
REV	DESCRIPTION	DWN	DATE	APPROVEN																																																													
A	First issue	Mr. chen	2016/03/17	John kine																																																													
<p>SPECIFICATIONS: Impedance: 50-75 Ohms Frequency Range:DC~6G VSWR:1.3max Working Voltage:500v RMS @ SEA level Insulation Resistance:5000 Ohms min Temperature Range:-40°C TO +140°C Drawings products are in line with ROHS standards</p>																																																																	
			<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2">NOTE:</td> <td rowspan="2">Tolerance</td> <td>0-6</td> <td>±0.10</td> <td rowspan="4" style="text-align: center;">  RENHOTECH GROUP www.renhotech.com </td> </tr> <tr> <td colspan="2"></td> <td>6-30</td> <td>±0.20</td> </tr> <tr> <td colspan="2"></td> <td>30-120</td> <td>±0.30</td> </tr> <tr> <td colspan="2"></td> <td>Angular</td> <td>±2°</td> </tr> <tr> <td colspan="2"></td> <td></td> <td style="text-align: center;">  </td> <td colspan="2">Name: BNC PLUG</td> </tr> <tr> <td colspan="2"></td> <td></td> <td>UNIT</td> <td>MM</td> <td>SIZE A</td> </tr> <tr> <td colspan="2"></td> <td>APPROVALS</td> <td>17/03.2016</td> <td>SCALE</td> <td>1:1</td> </tr> <tr> <td colspan="2">NO Component Number</td> <td>Material</td> <td>Finish</td> <td>Date</td> <td>Time</td> </tr> <tr> <td colspan="2"></td> <td></td> <td></td> <td>2016/03/17</td> <td>CAD FILE</td> </tr> <tr> <td colspan="2"></td> <td></td> <td></td> <td></td> <td>D/company drawings/BD</td> </tr> <tr> <td colspan="2"></td> <td></td> <td></td> <td></td> <td>SHEET: 1 OF 1</td> </tr> </table>			NOTE:		Tolerance	0-6	±0.10	 RENHOTECH GROUP www.renhotech.com			6-30	±0.20			30-120	±0.30			Angular	±2°					Name: BNC PLUG					UNIT	MM	SIZE A			APPROVALS	17/03.2016	SCALE	1:1	NO Component Number		Material	Finish	Date	Time					2016/03/17	CAD FILE						D/company drawings/BD						SHEET: 1 OF 1
NOTE:		Tolerance	0-6	±0.10	 RENHOTECH GROUP www.renhotech.com																																																												
			6-30	±0.20																																																													
		30-120	±0.30																																																														
		Angular	±2°																																																														
				Name: BNC PLUG																																																													
			UNIT	MM	SIZE A																																																												
		APPROVALS	17/03.2016	SCALE	1:1																																																												
NO Component Number		Material	Finish	Date	Time																																																												
				2016/03/17	CAD FILE																																																												
					D/company drawings/BD																																																												
					SHEET: 1 OF 1																																																												

Basic Information

Connector Type	Plug
Contact Type	Male Pin
Fastening Type	Bayonet
Mounting Feature	Bulkhead
Mounting Type	Panel Mount
Number of Ports	1
Orientation	Straight
RF Series	BNC Type

Electrical Specification

Dielectric Withstanding Voltage	1500 V rms
Frequency Range	0-4 GHz for 50 ohm
Impedance	50 ohm

Environmental Specification

Temperature Range	POM -40°C ~+60°C, Teflon -55°C ~+155°C
--------------------------	--

Mechanical Specification

Mating Durability	≥ 500 Cycles
--------------------------	--------------

Material and Finish


Component Description	Material	Finish
Shell	Zinc Alloy	Nickel Plated
Insulator	Teflon White	
Center Contact	Copper Alloy	Gold Plated

Impedance Testing

Impedance	50 ohm
-----------	--------

Frequency & VSWR Test Report

Frequency Range	0-4 GHz for 50 ohm
VSWR	R/A type $\leq 1.30/3\text{GHz}$, Straight type $\leq 1.22/3\text{GHz}$

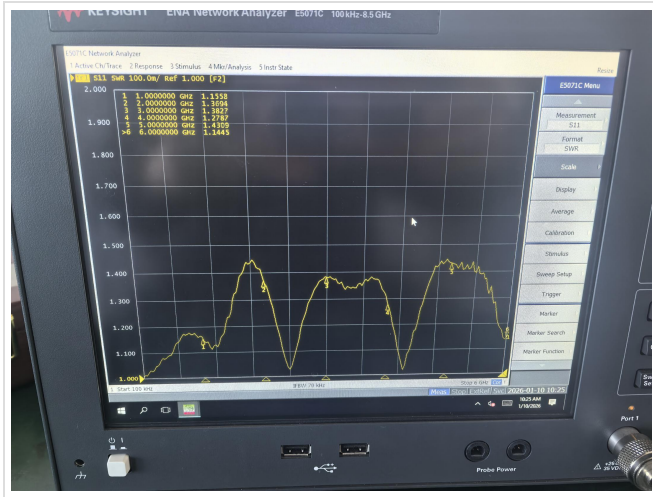

Contact Resistance Test

Contact Type	Male Pin
Center Contact Resistance	$\leq 1.5 \text{ M}\Omega$ (Milliohms Max.)
Outer Contact Resistance	$\leq 2.0 \text{ M}\Omega$ (Milliohms Max.)
Contact Termination Style	Solder



Working Voltage & Insulation Resistance Test

Working Voltage	500 V rms
Insulation Resistance	$\geq 5 \times 10^3 M\Omega$ (Megohms MIN.)



Version History

REV	Date	Revise Contents	Drafter	Approver
A.0	2026.3.23	The initial formulation	Marcella	Joson

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.