

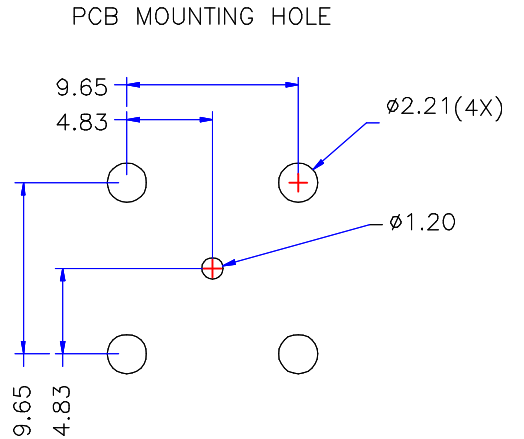


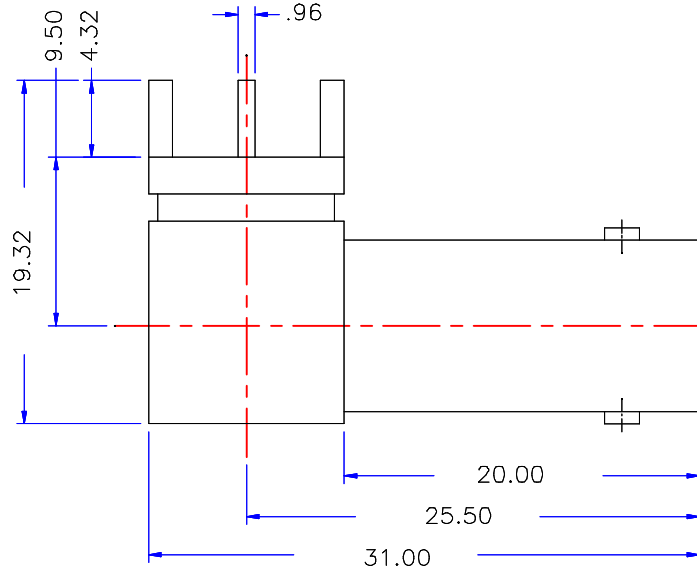

Product NO.	Renhotec-610-0044			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2016/3/10	John kine



Specifications

Impedance: 50 Ohms
 Frequency Range: DC~3G
 VSWR: 1.3MAX
 Working Voltage: 500V rms @ sea level
 Insulation Resistance: 5000 Ohms min
 Temperature Range: -55°C TO +155°C
 Relative Humidity: $\leq 95\%$ (40°C $\pm 2^\circ$ C)
 Drawings products are in line with ROHS standards

NOTE:	
DRAWN	2016/03/10
Zelin. Zhang	10
CHECKED	
APPROVALS	19/03.2016
John Kine	

Tolerance	0-6	± 0.10
	6-30	± 0.20
View	30-120	± 0.30
	Angular	$\pm 2^\circ$
UNIT	MM	
SCALE	1:1	



RENHOTEC GROUP

Name: BNC JACK CONNECTOR

SIZE	Product NO. RENHOTEC-610-0044	REV
A		B
DateTime	CAD FILE	SHEET: 1 OF 1
2016/3/10	D/company drawings/BD	

DESCRIPTION	MATERIAL	FINISH	QTY
CONTACT PIN	PHOS. BRONZE	GOLD	1
INSULATOR	TEFLON	NATURAL	1
BODY	BRASS	NICKEL	1