


RECOMMENDED MOUNTING HOLE

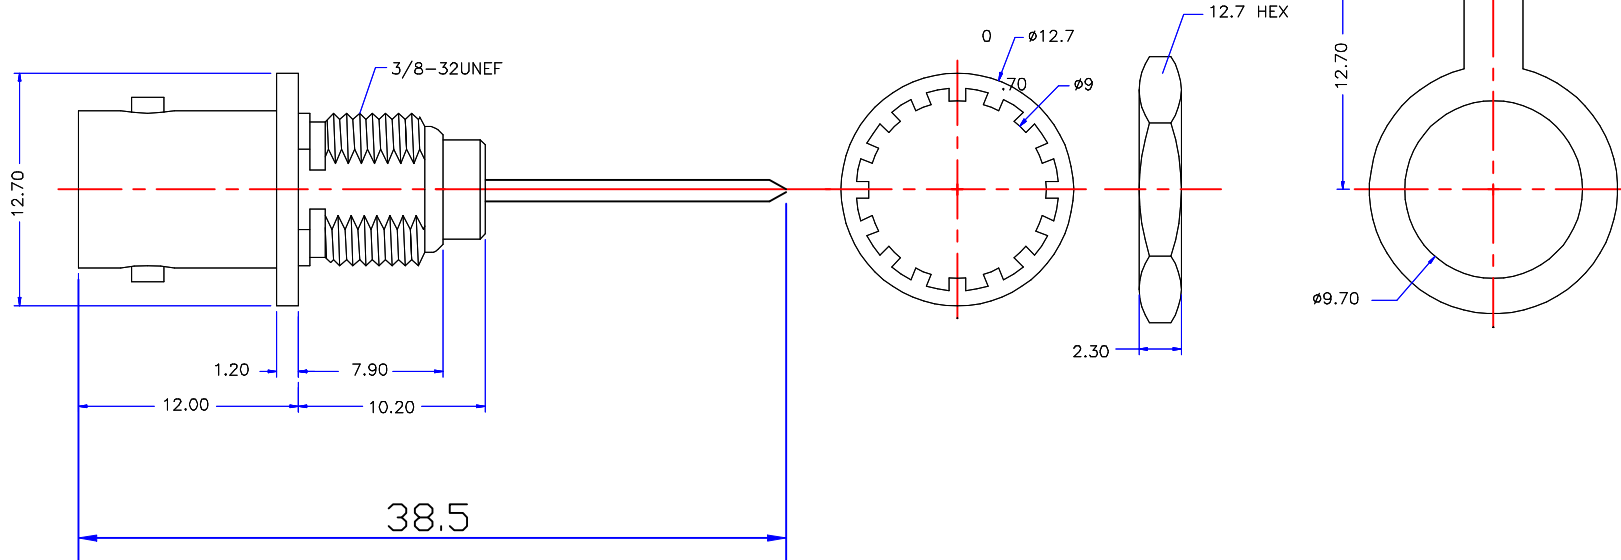

Specification:

Impedance: 50. Ohms

VSWR: 1.3MAX

Frequency range: DC~4G

Working Voltage: 500V rms @ sea level

Insulation resistance: 5000 Ohms min

Temperature range: -55°C TO +155°C

Relative temperature: ≤95% (40° C ± 2° C)

Drawings products are in line with ROHS standards .

Product NO.	Renhotec-610-0063			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2016/3/11	John kine

8				
7				
6	SOLDER TAB	BRASS	NICKEL	1
5	HEX NUT	BRASS	NICKEL	1
4	LOCK WASHER	BRASS	NICKEL	1
3	INSULATOR	DELTRIN	NATURAL	1
2	CONTACT PIN	PHOS. BRONZE	GOLD	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

NOTE:	
DRAWN	2016/03/11
Zelin. Zhang	
CHECKED	
APPROVALS	11/03.2016
John Kine	

Tolerance	0-6	±0.10
	6-30	±0.20
View	30-120	±0.30
	Angular	±2°
UNIT	MM	
SCALE	1:1	

Name: BNC JACK			
SIZE	Product NO.	RENHOTEC-610-0063	REV
A			B
DateTime	2016/3/11	CAD FILE	D/company drawings/BD
		SHEET: 1 OF 1	