




SPECIFICATIONS

Impedance ; 50 OHm
 Frequency ; DC~4GHz
 Insulation resistance ; 5,000 MEGOHM
 Voltage ; 500 VOLTS PEAK
 Dielectric withstand voltage; 1,500 VRMS
 V.S.W.R ; 1.35 TO 4000 MHZ
 Temperature range : -55°C to +155°C

Product NO.	Renhotec-610-0209			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/2/22	John kine

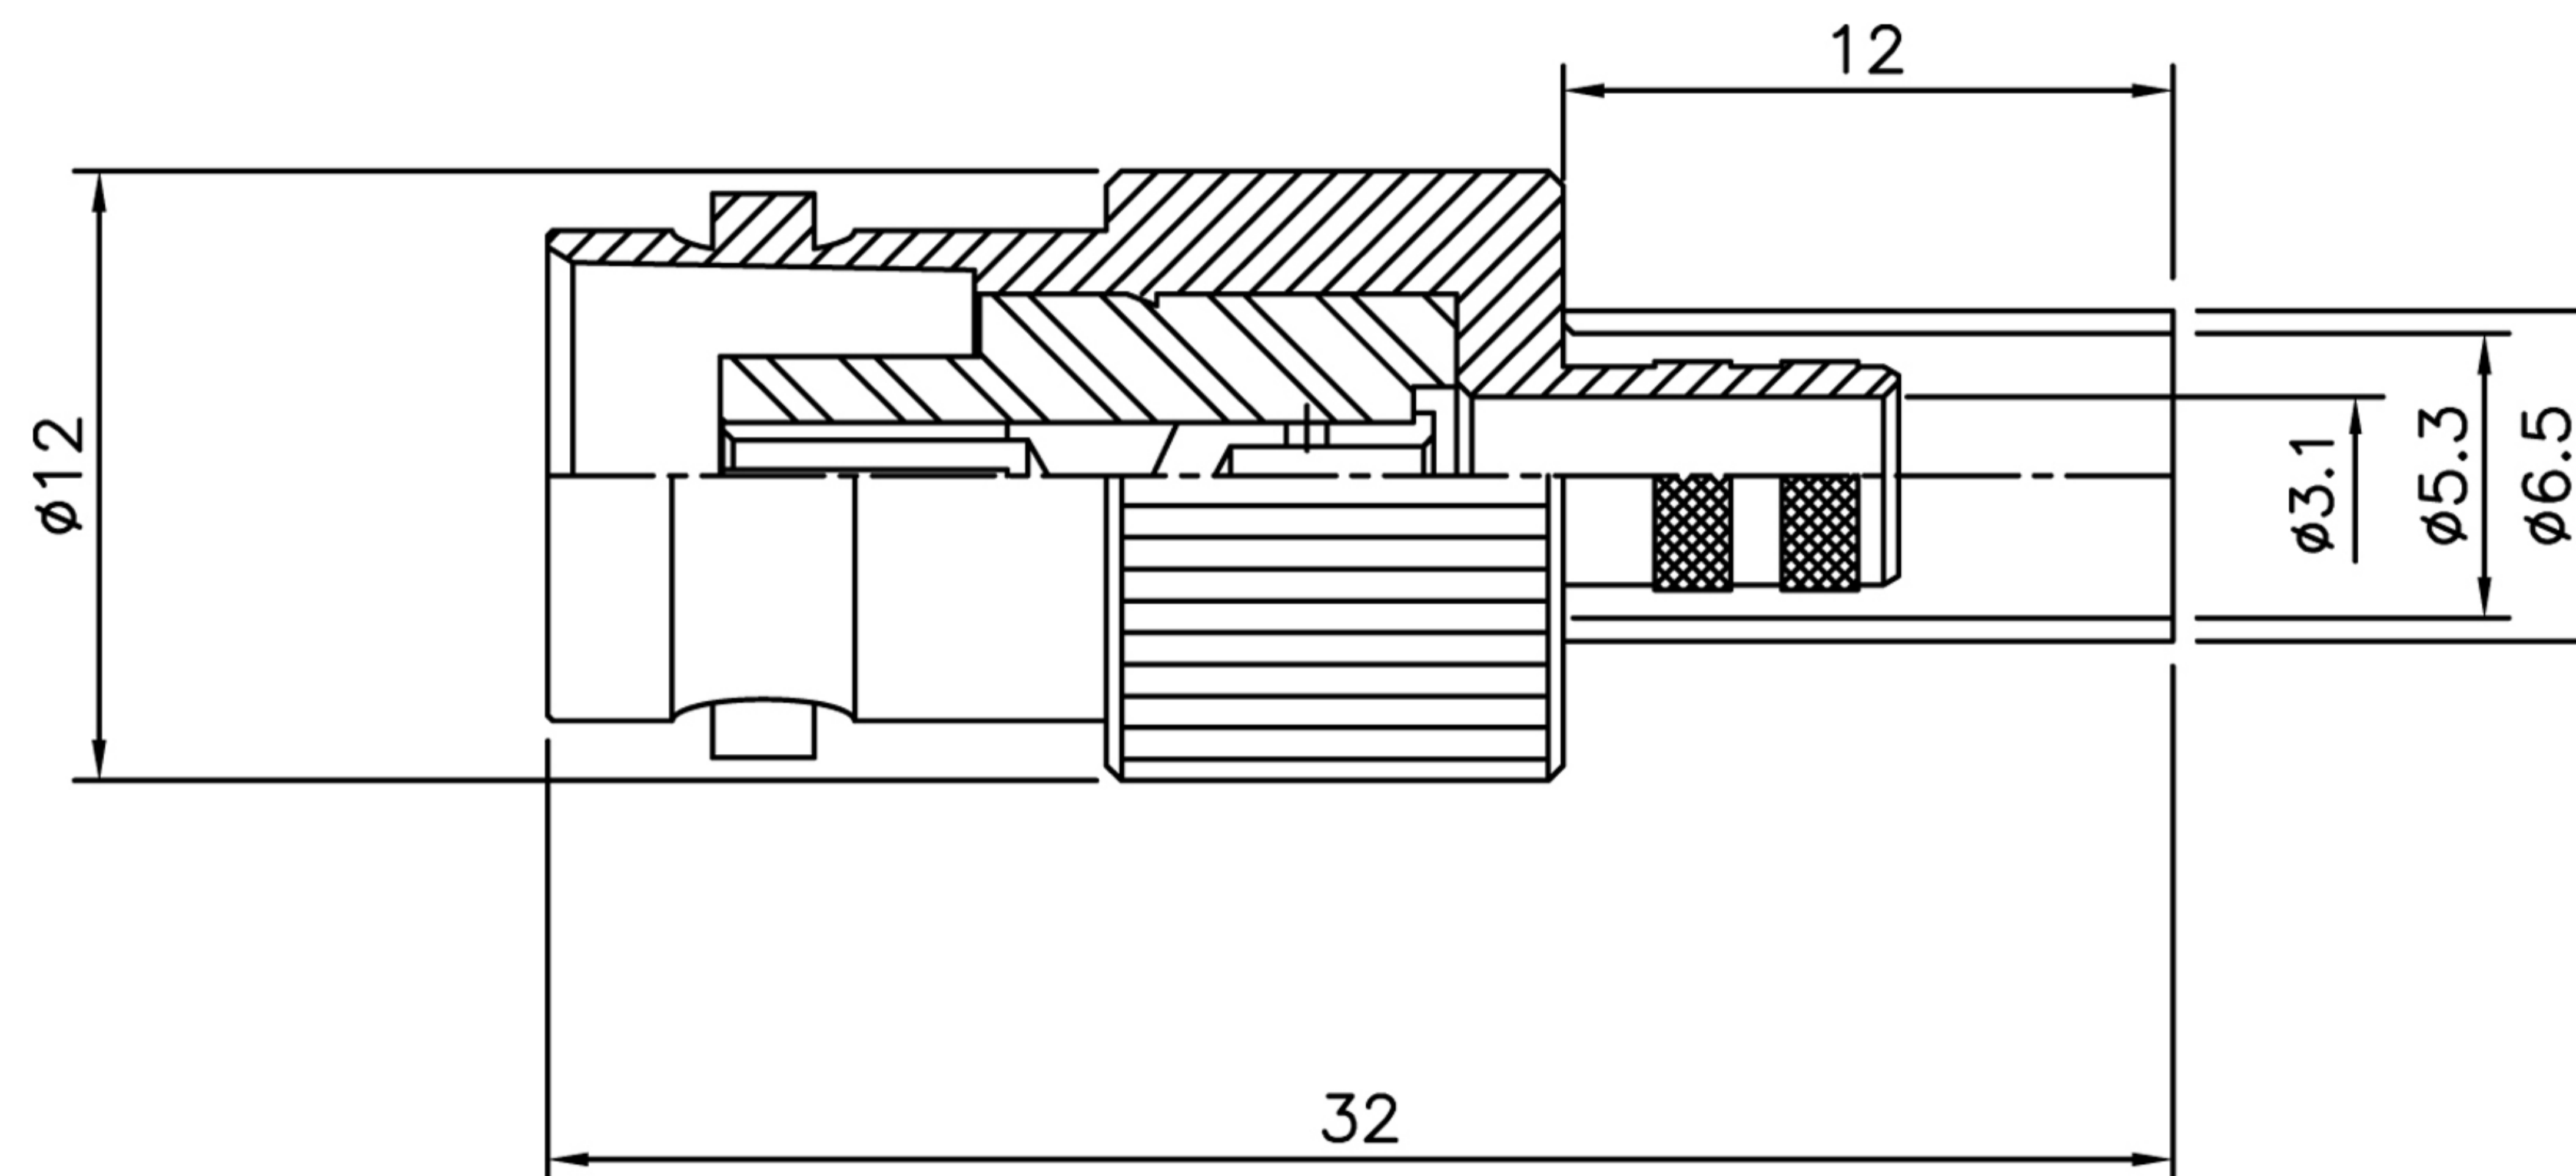

Item	Materials	Plating
Body	Brass	Nickel Plated
Center contact	Be-Cu	Gold Plated
Ferrule	Brass	Nickel Plated
Insulator	PTFE	-

NOTE :		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°
DRAWN	Zelin. Zhang	2017/2/22	View
CHECKED			UNIT MM
APPROVALS	John Kine	2017/2/22	SCALE 1:1



RENHOTEC GROUP

Name: BNC Straight Jack for Cable-RG58

SIZE A	Product NO. RHT-610-0209	REV B
DateTime 2017/2/22	CAD FILE D/company drawings/BD	SHEET: 1 OF 1