

Basic Information	
Connector Type	Jack
Fastening Type	Bayonet
Mounting Type	Panel Mount
Number of Ports	1
Orientation	Right Angle
Termination	SMT

Mechanical Specification	
Connector Style	BNC Connector
Mount Feature	Bulkhead/SMT

Environmental Specification	
Ingress Protection	IP65
Temperature Range	-45°C to +125°C

Material and Finish		
Component Description	Material	Finish
Shell	Zinc Alloy	Nickel Plated
Insulator	Teflon White	
Center Contact	Copper	Gold Plated

Impedance Testing	
Impedance	50 ohm


Frequency & VSWR Test Report

Frequency Range

4 GHz

VSWR

1.5MAX

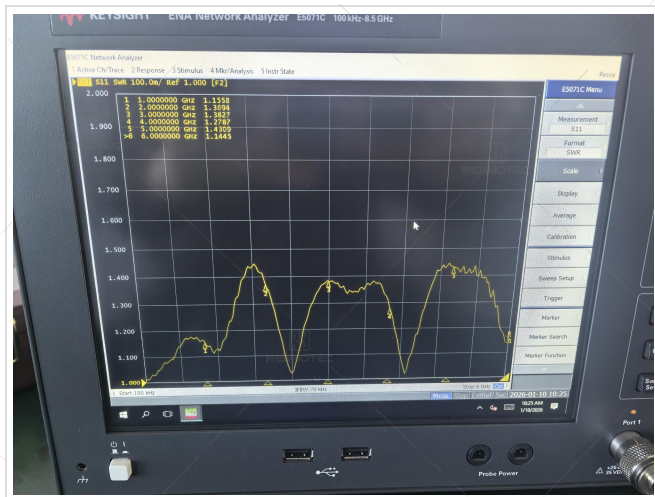

Contact Resistance Test

Contact Type

Female Pin



Working Voltage & Insulation Resistance Test

Working Voltage	500 V rms
Insulation Resistance	≥5000 MΩ



Version History

REV	Date	Revise Contents	Drafter	Approver
A.0	2026.7.9	The initial formulation	Esther	Joson

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.