
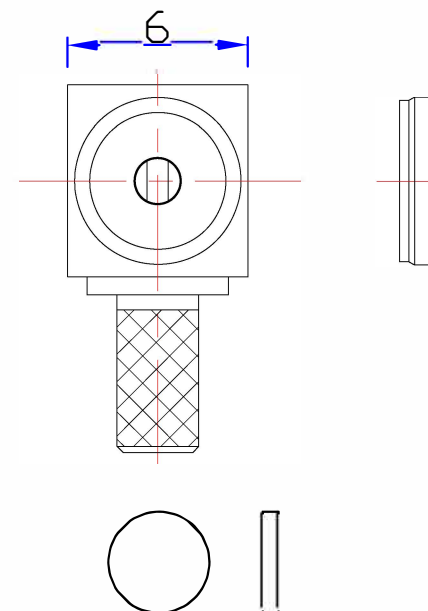


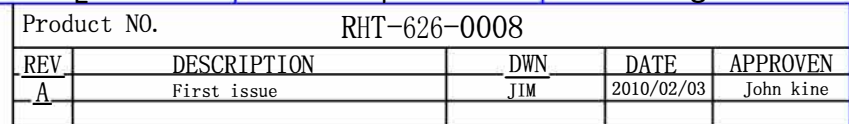

VSWR:1.3MAX
Frequency range:DC~3G
Working Voltage:500V rms @ sea level
Insulation resistance:5000 Ohms min
Temperature range:-55℃ TO +155℃
Relative temperature:≤95%(40° C±2° C)
Drawings products are in line with ROHS standards.

1	INSULATOR	PTFE	WHITE	1	NOTE:		Tolerance	0-6 ±0.2 6-30 ±0.3 30-120 ±0.5 Angular ±2°	 RENHOTEC GROUP www.renhotec.com				
2	CHMPING	BRASS	NICKEL	1									
3	SHELL	BRASS	GOLD	1									
4	PIN	BRASS	GOLD	1									
5	BODY	BRASS	GOLD	1									
6													
7					DRAWN	2012/04/		Name: SMB CONNECTOR					
8					Zelin. Zhang	10							View
9					CHECKED								UNIT
10					APPROVALS				SIZE A	Product NO.	RHT-626-0008	REV A	
NO	Component Number	Material	Finish	QTY	John	12/04.2012	SCALE	1:1	DateTime	2012/04/10	CAD FILE	SHEET: 1 OF 1	
A		B		C		D		E		F		G	