

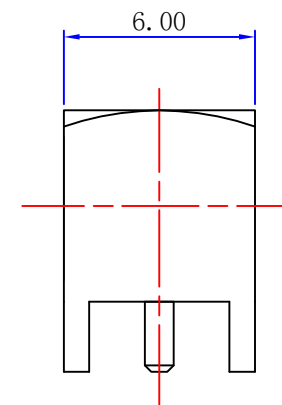


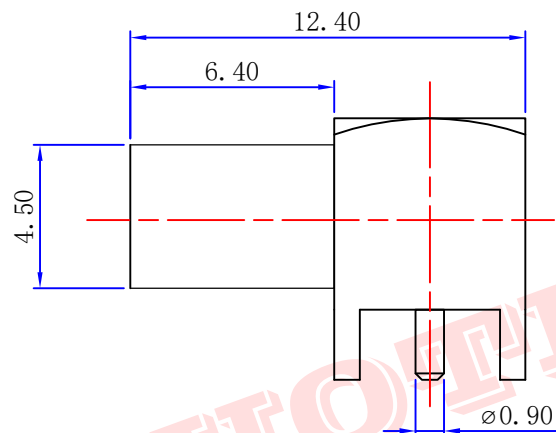

Product NO.		RHT-617-0010		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. chen	2014/04/28	John kine
B	Size change 0.8MM	Gavin	2020/08/31	John kine

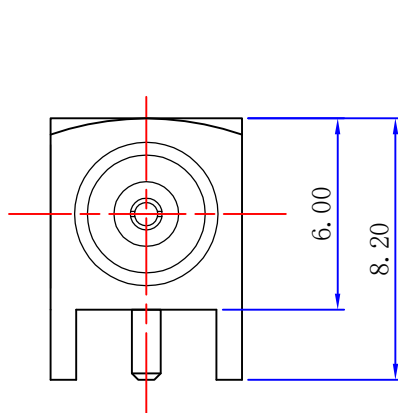

Specification:

Impedance: 50 Ohms



Frequency Range: 0~6GHz

VSWR: 1.5MAX

Working Voltage: <170V rms @ sea level

Insulation resistance: 5000 Ohms min

Temperature range: -55°C TO +155°C

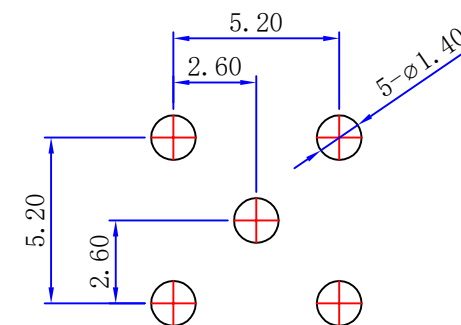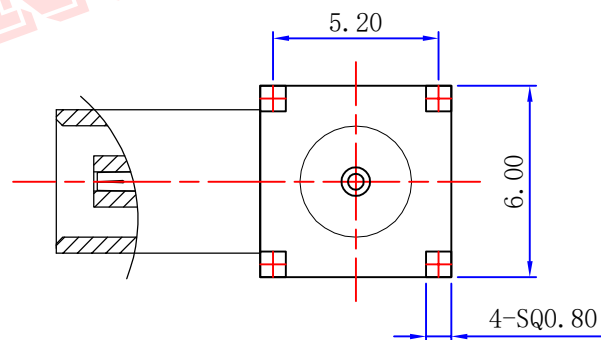

Recommended
PCB size

1	Body	Brass	Gold:1-1.5u"	1	NOTE:	Tolerance	0.5 - 8mm ± 0.15mm 8 - 30mm ± 0.20mm 30 -120mm ± 0.30mm		RENHOTEC GROUP	
2	Insulator	Ptfe	None	1						
3	Center pin	Brass	Gold:3u"	1						
4										
5					DRAWN Gavin	View				
6										
7					CHECKED	UNIT	MM	R/A MCX JACK FOR PCB CONNECTOR		
8										
9					APPROVALS John kine	SCALE	1:1	SIZE A	Product NO. RHT-617-0010	REV B
10										
NO	Component Number	Material	Finish	QTY				DateTime 2020/08/31	CAD FILE D/company drawings/BD	SHEET: 1 OF 1
A		B		C	D	E	F	G		