

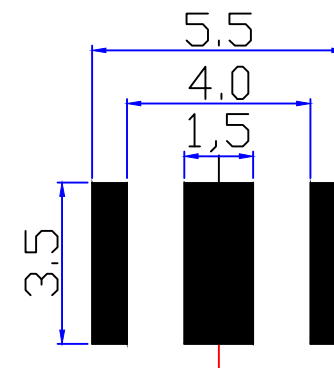



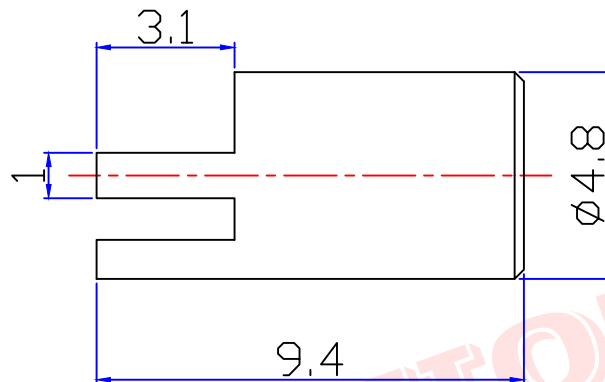

Product NO.		RHT-617-0135		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. CHEN	2017/07/12	John kine
B				

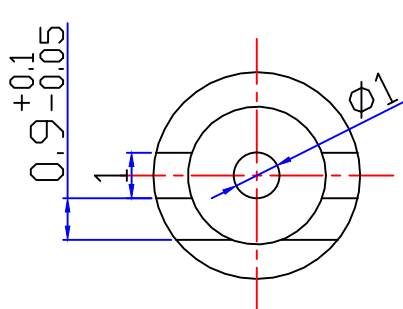

Specifications

Impedance: 50 Ohms

Frequency Range: 0~6Ghz


VSWR: 1.25max

Working Voltage: <170 V rms @ sea level


Insulation Resistance: 5000 Ohms min

Temperature Range: -65°C TO +165°C

Drawings products are in line with ROHS standards

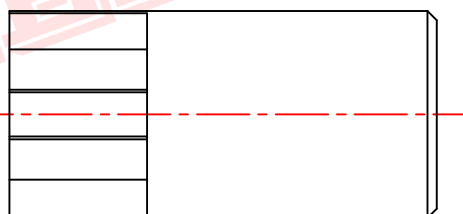

PCB

1	Body	Brass	NICKEL	1	NOTE:	Tolerance	X.	±0.10	 RENHOTEC GROUP www.renhotec.com		
2	Insulation	Teflon	White	1			X. X	±0.08			
3	Pin	Brass	GOLD	1			X. XX	±0.05			
4							Angular	±5°			
5					DRAWN	View			Name: MCX JACK PCB		
6					Zelin.chen						
7					CHECKED						
8											
9					APPROVALS	UNIT	MM		SIZE	Product NO.	REV
10											
NO	Component Number	Material	Finish	QTY	John	SCALE	1:1		DateTime	CAD FILE	SHEET: 1 OF 1
									2017/07/12	D/company drawings/BD	