




Product NO.		RHT-617-1001		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. CHEN	2015/07/24	John kine
B				

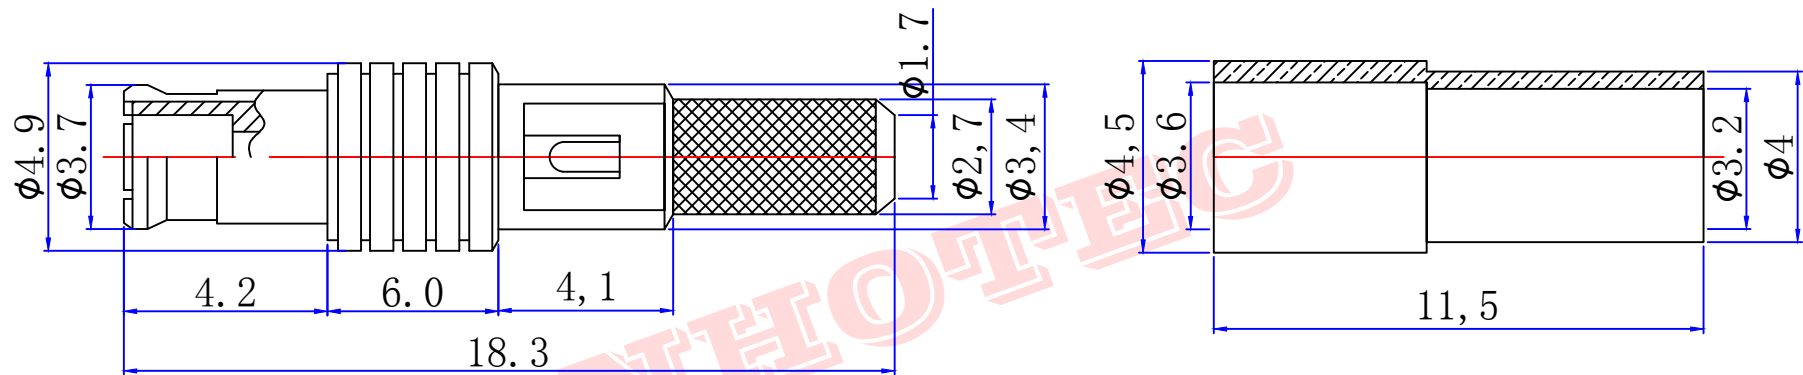

Specifications:

IMPEDANCE: 50 Ohms
 Frequency range: 0~6GHz
 VSWR: 1.5MAX
 Working voltage: 500V rms @ sea level
 Insulation resistance: 5000 Ohms min
 Temperature range: -65°C TO +165°C
 Relative temperature: ≤95% (40° C ± 2° C)

NOTE:

Tolerance

X.	±0.15
X.X	±0.10
X.XX	±0.05
Angular	±5°

RENHOTEC
www.renhotec.com

RENHOTEC GROUP

Name: MCX Plug FOR RG316 CABLE


SIZE	Product NO.	REV
A	RHT-617-1001	A
DateTime	CAD FILE	SHEET: 1 OF 1
2015/07/24	H/company drawings/BD	

5	FERRULE	BRASS	GOLD	1
4	CONTACT MALE	BRASS	GOLD	1
3	BODY	BRASS	GOLD	1
2	INSULATOR	TEFLON		1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

DRAWN
 Zelin. Zhang
 CHECKED

APPROVALS
 John

View



UNIT

MM

SCALE

1:1