






E		F		G	
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN	
R1.0	First issue	Gavin	2025/04/09	JIM. KING	

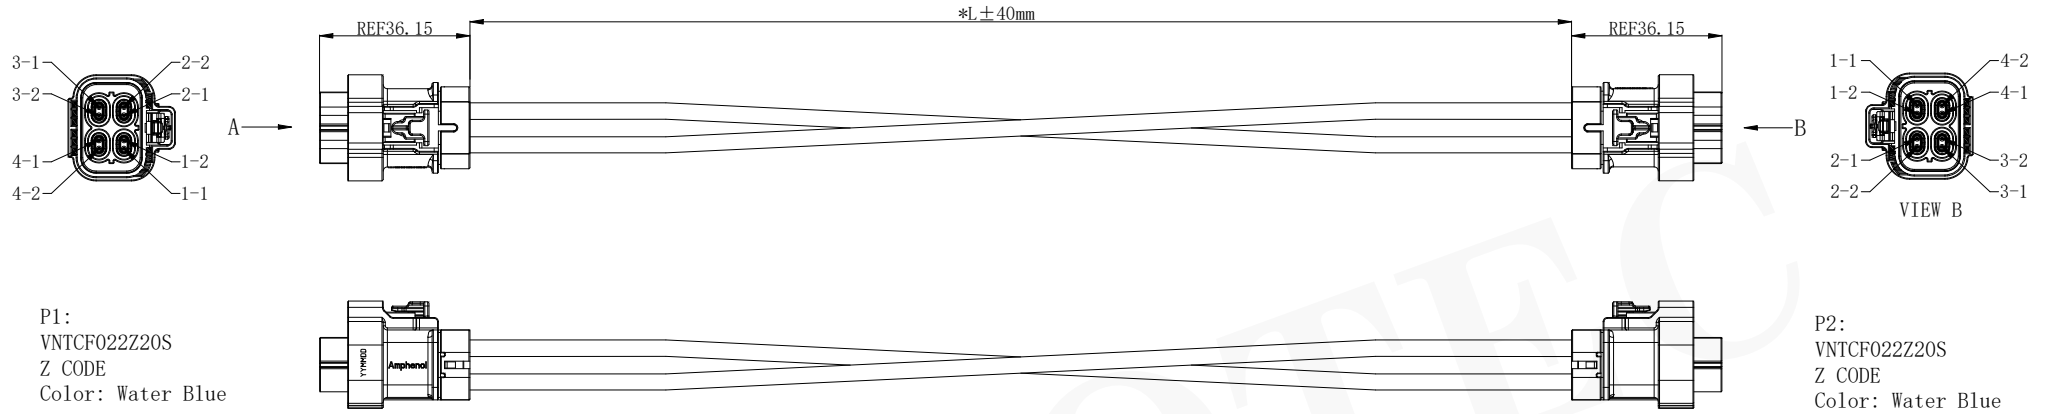


*Wiring Table

P1		P2
1-1	White	1-1
1-2	Green	1-2
2-1	White	2-1
2-2	Green	2-2
3-1	White	3-1
3-2	Green	3-2
4-1	White	4-1
4-2	Green	4-2



NOTES
GENERAL SPECIFICATION:
CURRENT RATING: 1.5A.
CONTACT RESISTANCE: 20mΩ MAX.
INSULATOR RESISTANCE: 100MQMIN. AT
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
OPERATION TEMPERATURE: -40° C ~ +105° C

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED



PART DESCRIPTION:
VNTCF022Z20S FEMALE TO FEMALE CABLE

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 - 120mm ± 0.30mm

Appr: JIM. KING	P/N: RHT-605-9899				
Check:	Date	Scale	Unit	Type	Page
Draw: Gavin	2025. 04. 09	Free	MM	Z	1/1

2	Cable	TKSTPD38	4PCS
1	Connector	VNTCF022Z20S Femele Z CODE Color: Water Blue	2PCS
NO	PartName	Specifications	Q' ty