




SPECIFICATIONS

1. IMPEDANCE: 50 Ohm
2. FREQUENCY RANGE: 0~6GHz
3. V.S.W.R.: 1.20:1max @6GHz


Product NO.	Renhotec-614-0104			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/2/27	John kine

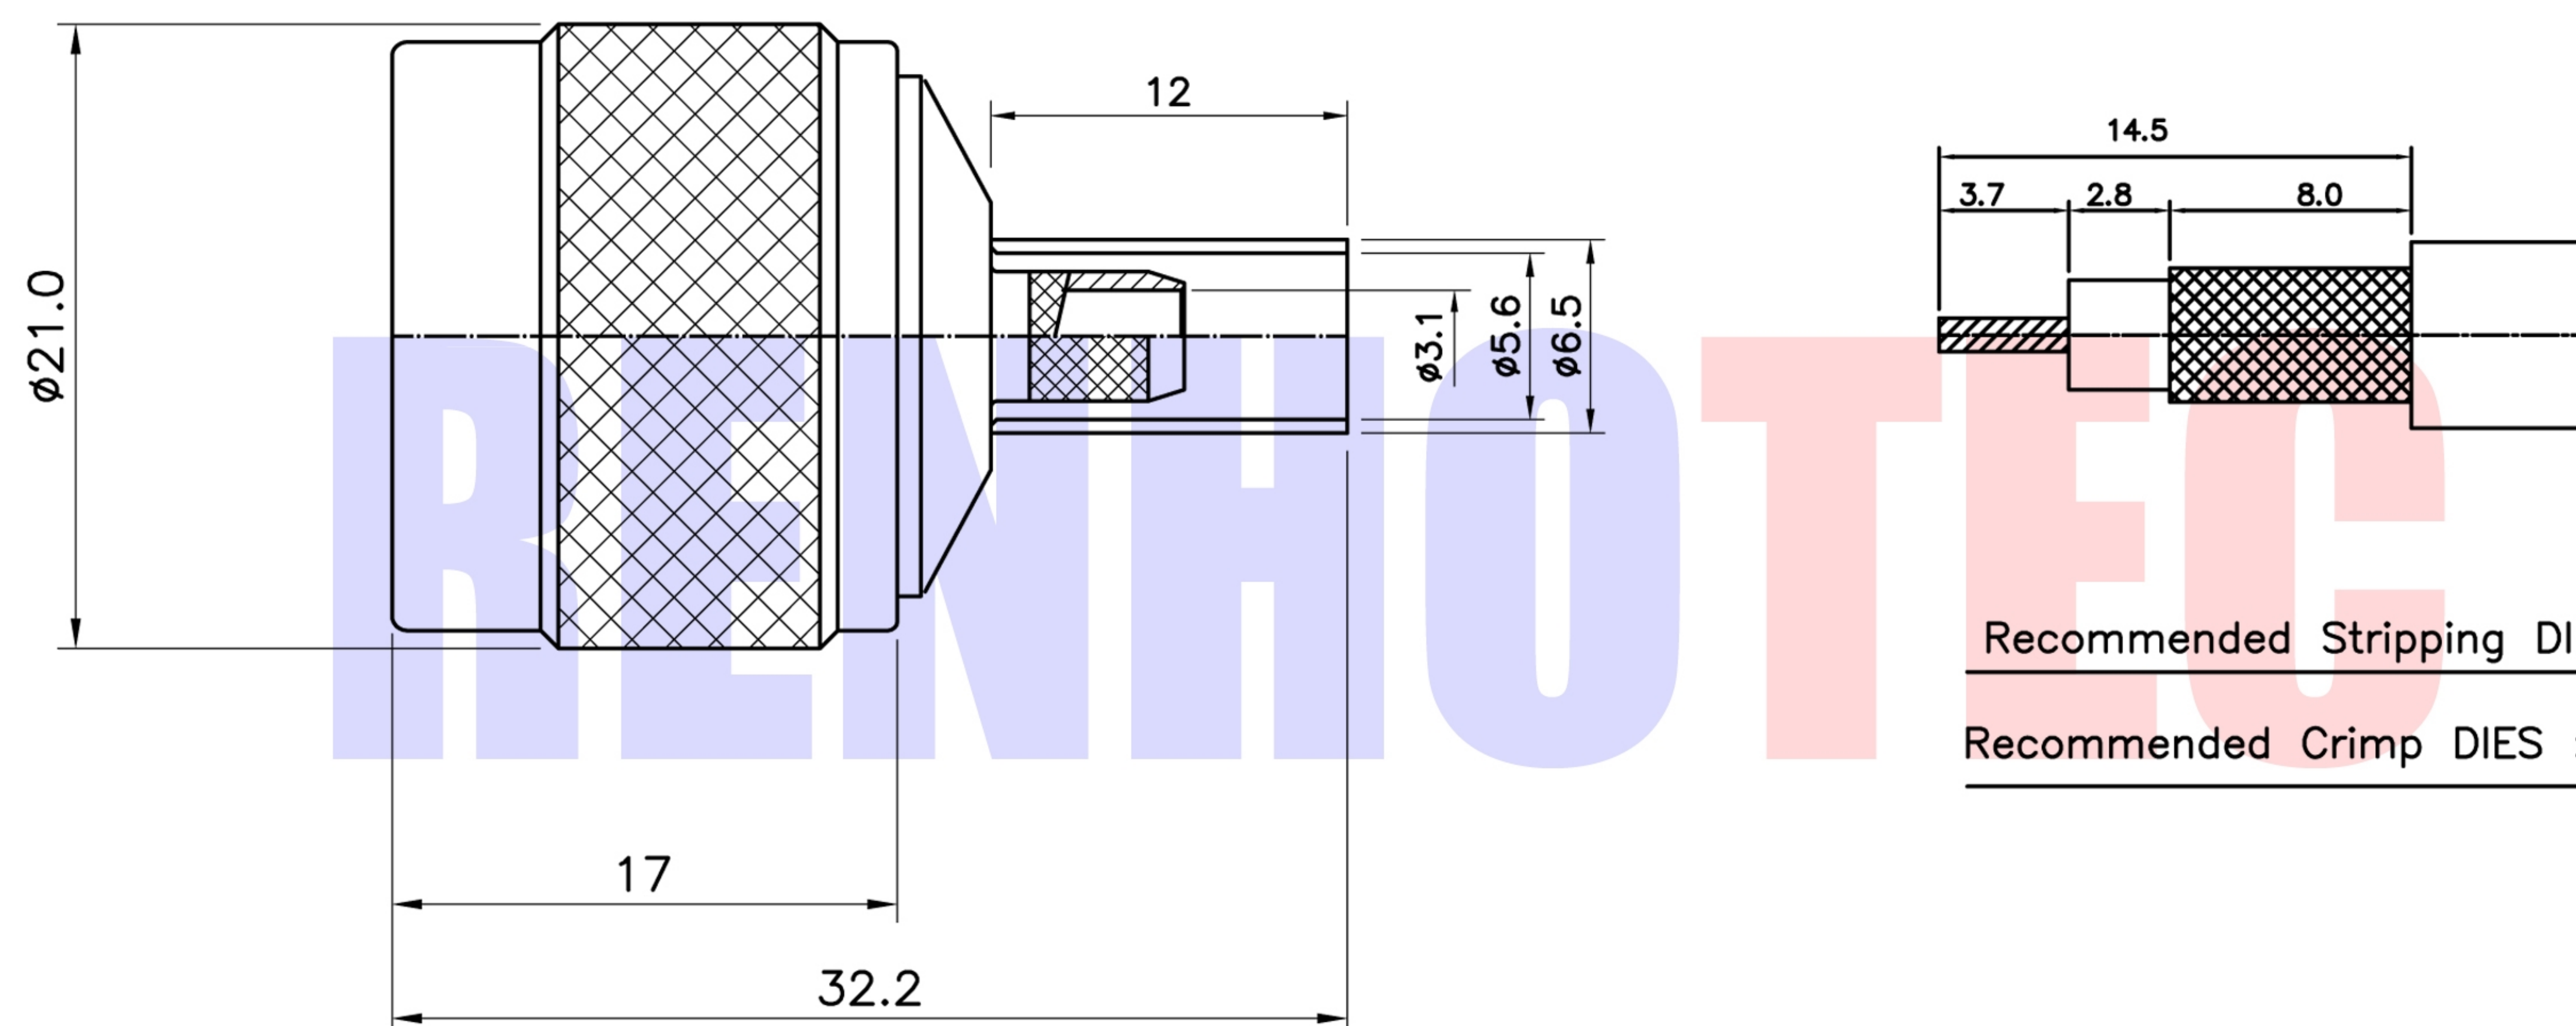

Recommended Stripping DIM'S

Recommended Crimp DIES : HEX5.5

Connector parts	Materials	Finish
Coupling Cap	Brass	Nickel Plated
Body	Brass	Nickel Plated
Center contact	Brass	Gold Plated
Insulator	TEFLON	—
Ferrule	Brass	Nickel Plated

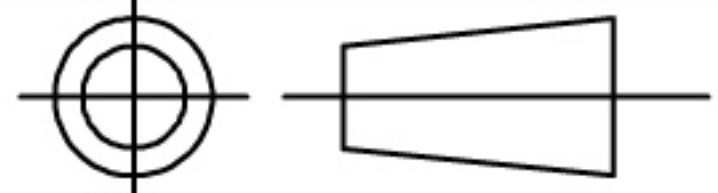NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	 RENHOTEC GROUP		
DRAWN						
Zelin. Zhang	2017/2/27	View		Name: N Type Staight Plug for Cable RG400, 223.LMR195, 142		
CHECKED				SIZE A	Product NO. RHT-614-0104	REV B
APPROVALS		SCALE	1:1	DateTime	CAD FILE	SHEET: 1 OF 1
John Kine	2017/2/27			2017/2/27	D/company drawings/BD	