




SPECIFICATIONS

Impedance ; 50ohm
Frequency ; DC~6GHz
Working Voltage; 1,000 VRMS
VSWR ; max 1.25:1 UP TO 2.5GHz
Temperature range : -55°C to +165°C

Product NO.	Renhotec-614-0105			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/2/27	John kine

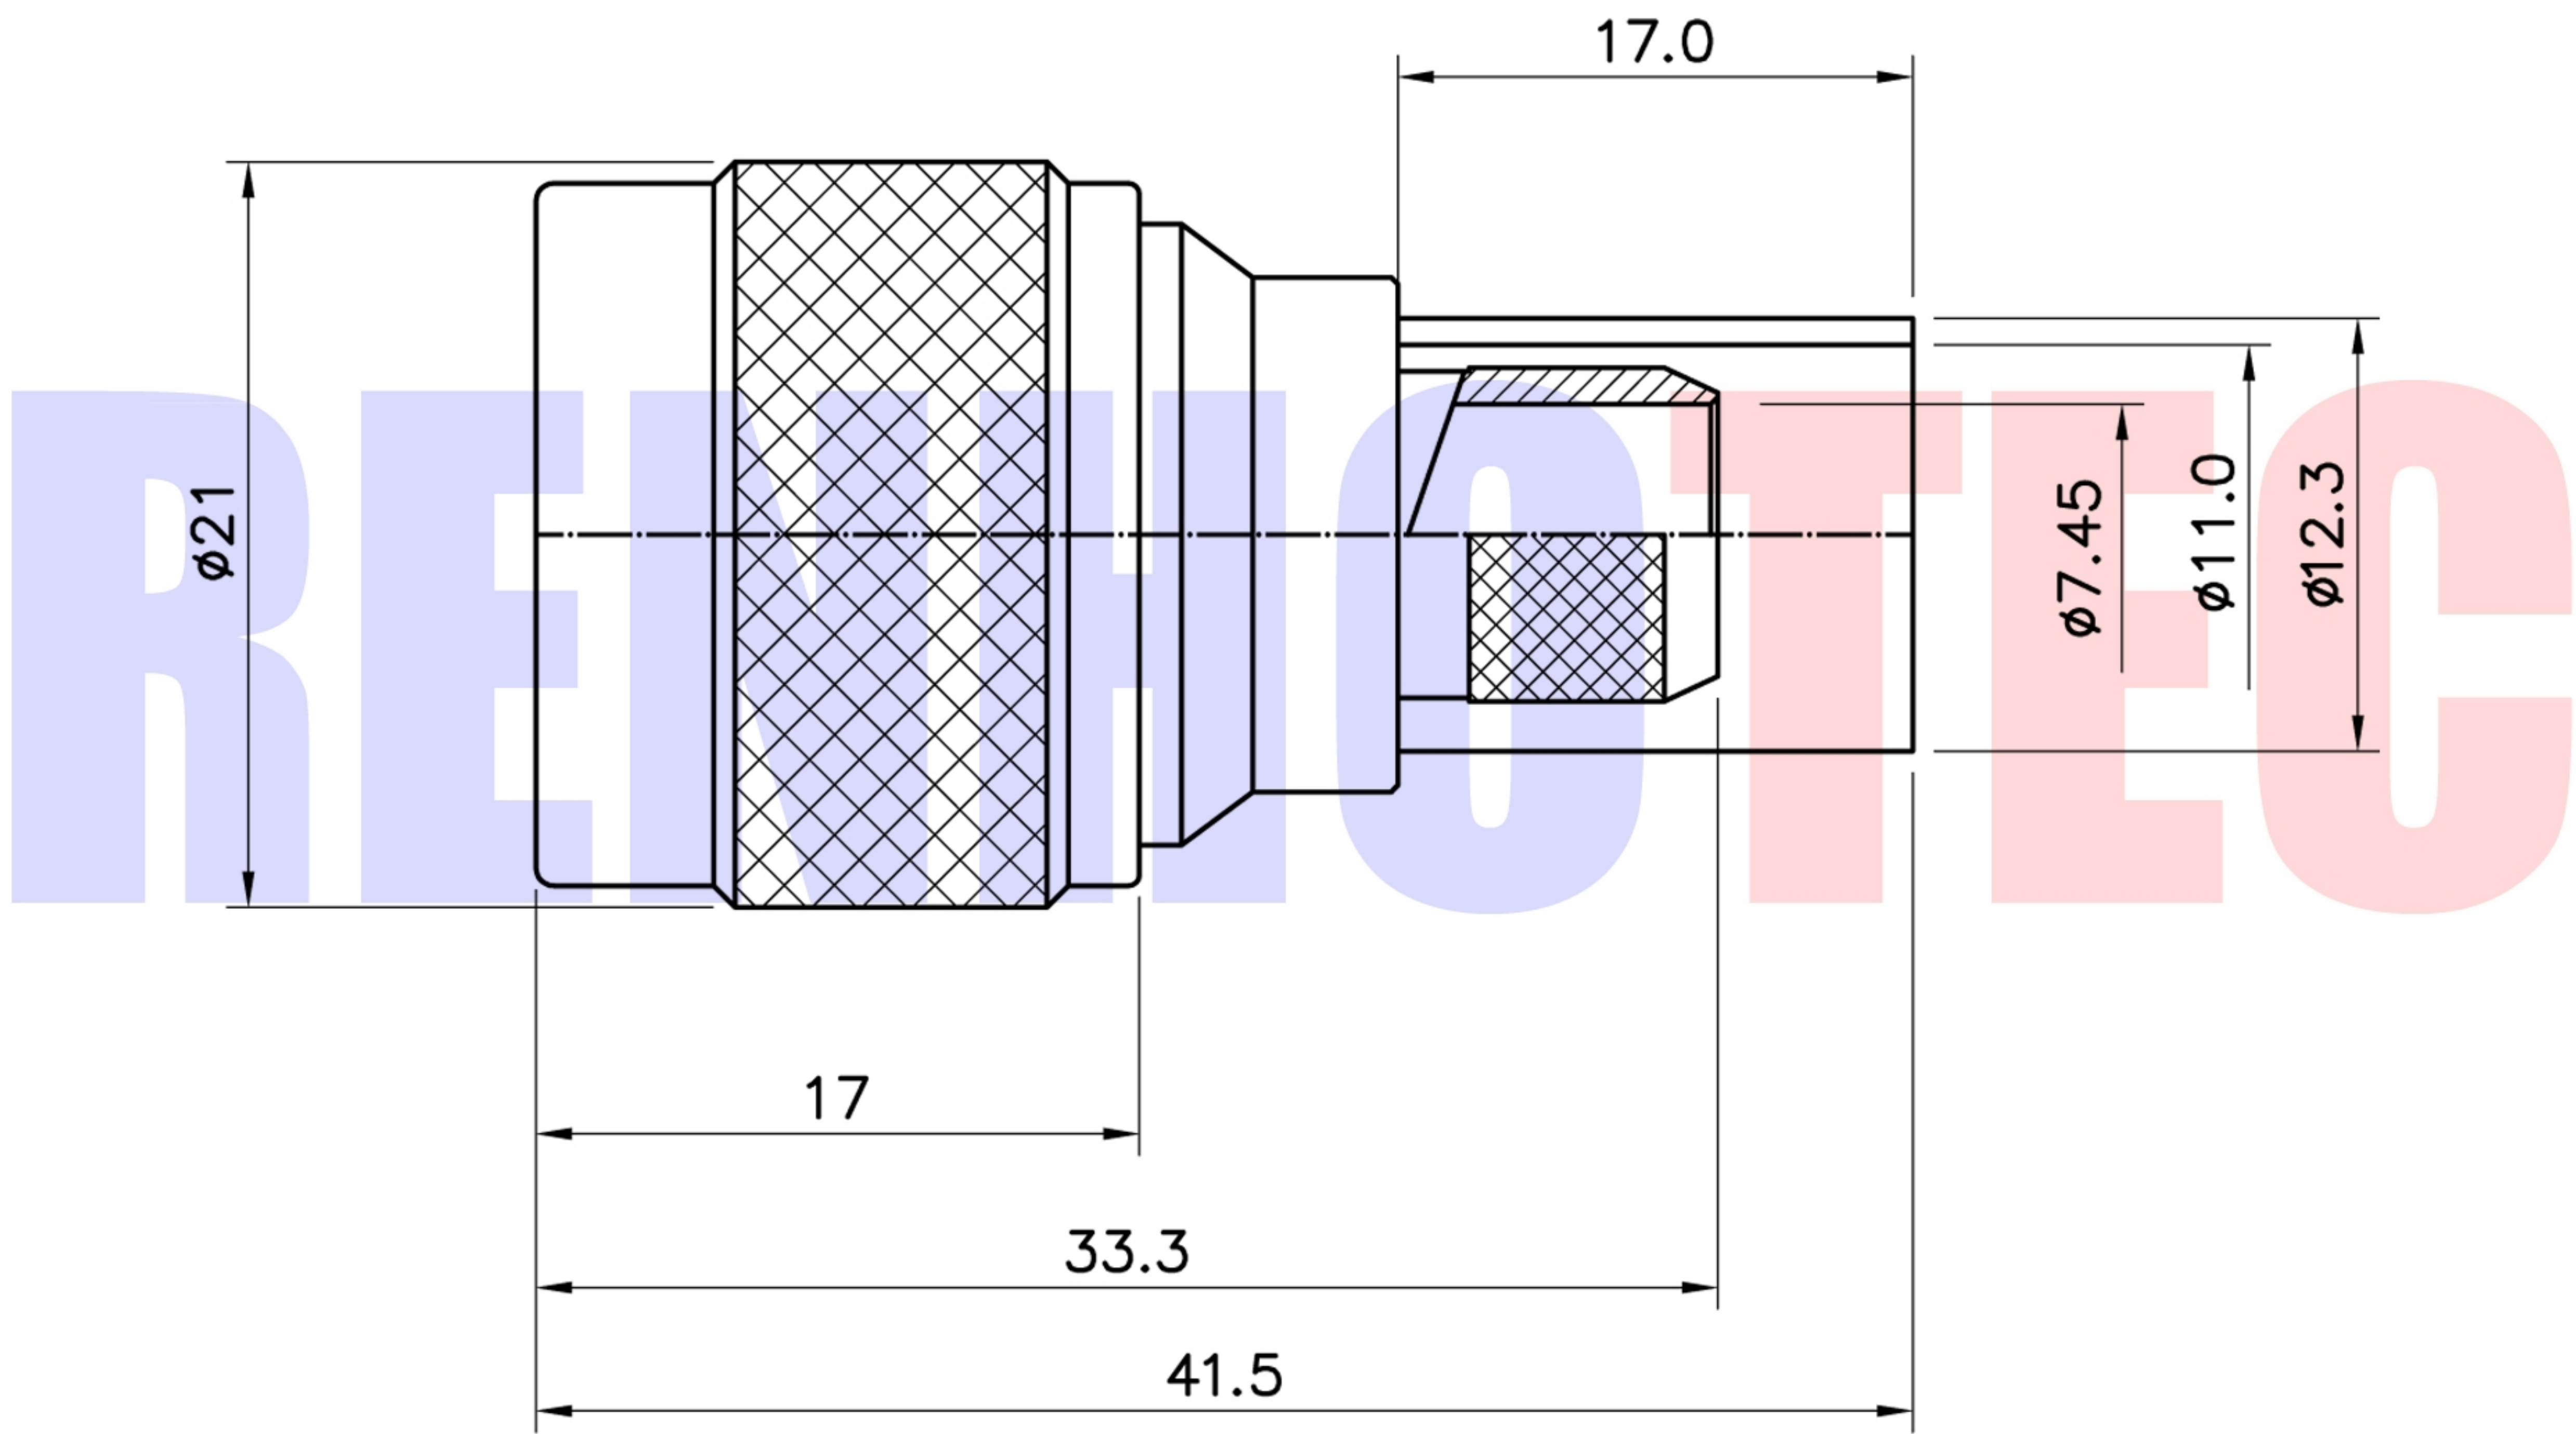

Connector parts	Materials	Finish
Coupling Cap	Brass	Nickel Plated
Body	Brass	Nickel Plated
Center contact	Brass	Gold Plated
Insulator	TEFLON	—
Ferrule	Brass	Nickel Plated

NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	RENHOTEC www.renhotec.com RENHOTEC GROUP		
DRAWN						
Zelin. Zhang	2017/2/27	View		Name: N Type Staight Plug for Cable RG214		
CHECKED		UNIT	MM	SIZE A	Product NO. RHT-614-0105	REV
APPROVALS		SCALE	1:1	DateTime	CAD FILE	SHEET: 1 OF 1
John Kine	2017/2/27			2017/2/27	D/company drawings/BD	