Product NO.	Renhotec-614-0106			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr.Wang	2017/2/27	John kine

SPECIFICATIONS

Impedance ; 50ohm

Frequency ; DC~6GHz

Working Voltage; 1,000 VRMS

VSWR ; max 1.25:1 UP TO 2.5GHz

Temperature range : −55°C to +165°C

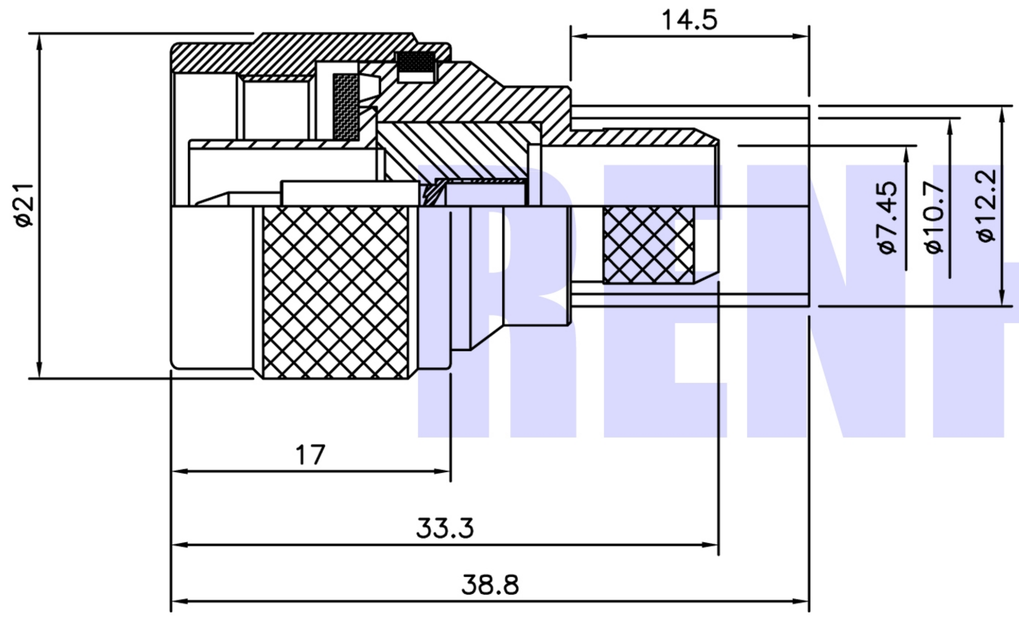

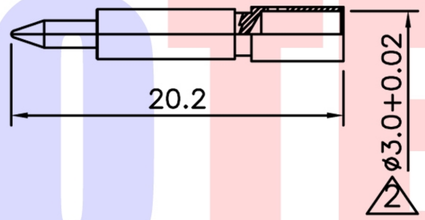

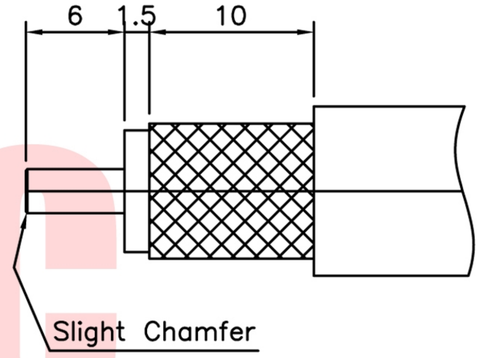

Recommended Stripping DIM'S

Recommended Crimp DIES : HEX10.7

Connector parts	Materials	Finish
Coupling Cap	Brass	Nickel Plated
Body	Brass	Nickel Plated
Center contact	Brass	Gold Plated
Insulator	TEFLON	—
Ferrule	Brass	Nickel Plated

NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	RENHOTEC www.renhotec.com	RENHOTEC GROUP
DRAWN Zelin.Zhang	2017/2/27	View		Name: N Type Straight Plug for Cable LMR400,RG393	
CHECKED		UNIT	MM	SIZE A / Product NO. RHT-614-0106	REV B
APPROVALS John Kine	2017/2/27	SCALE	1:1	DateTime 2017/2/27 / CAD FILE D/company drawings/BD	SHEET: 1 OF 1