




SPECIFICATIONS

Impedance ; 50ohm
Frequency ; DC~6GHz
Working Voltage; 1,000 VRMS
VSWR ; max 1.25:1 UP TO 6.0GHz
Temperature range : -55°C to +155°C


Product NO.	Renhotec-614-0113			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/2/27	John kine

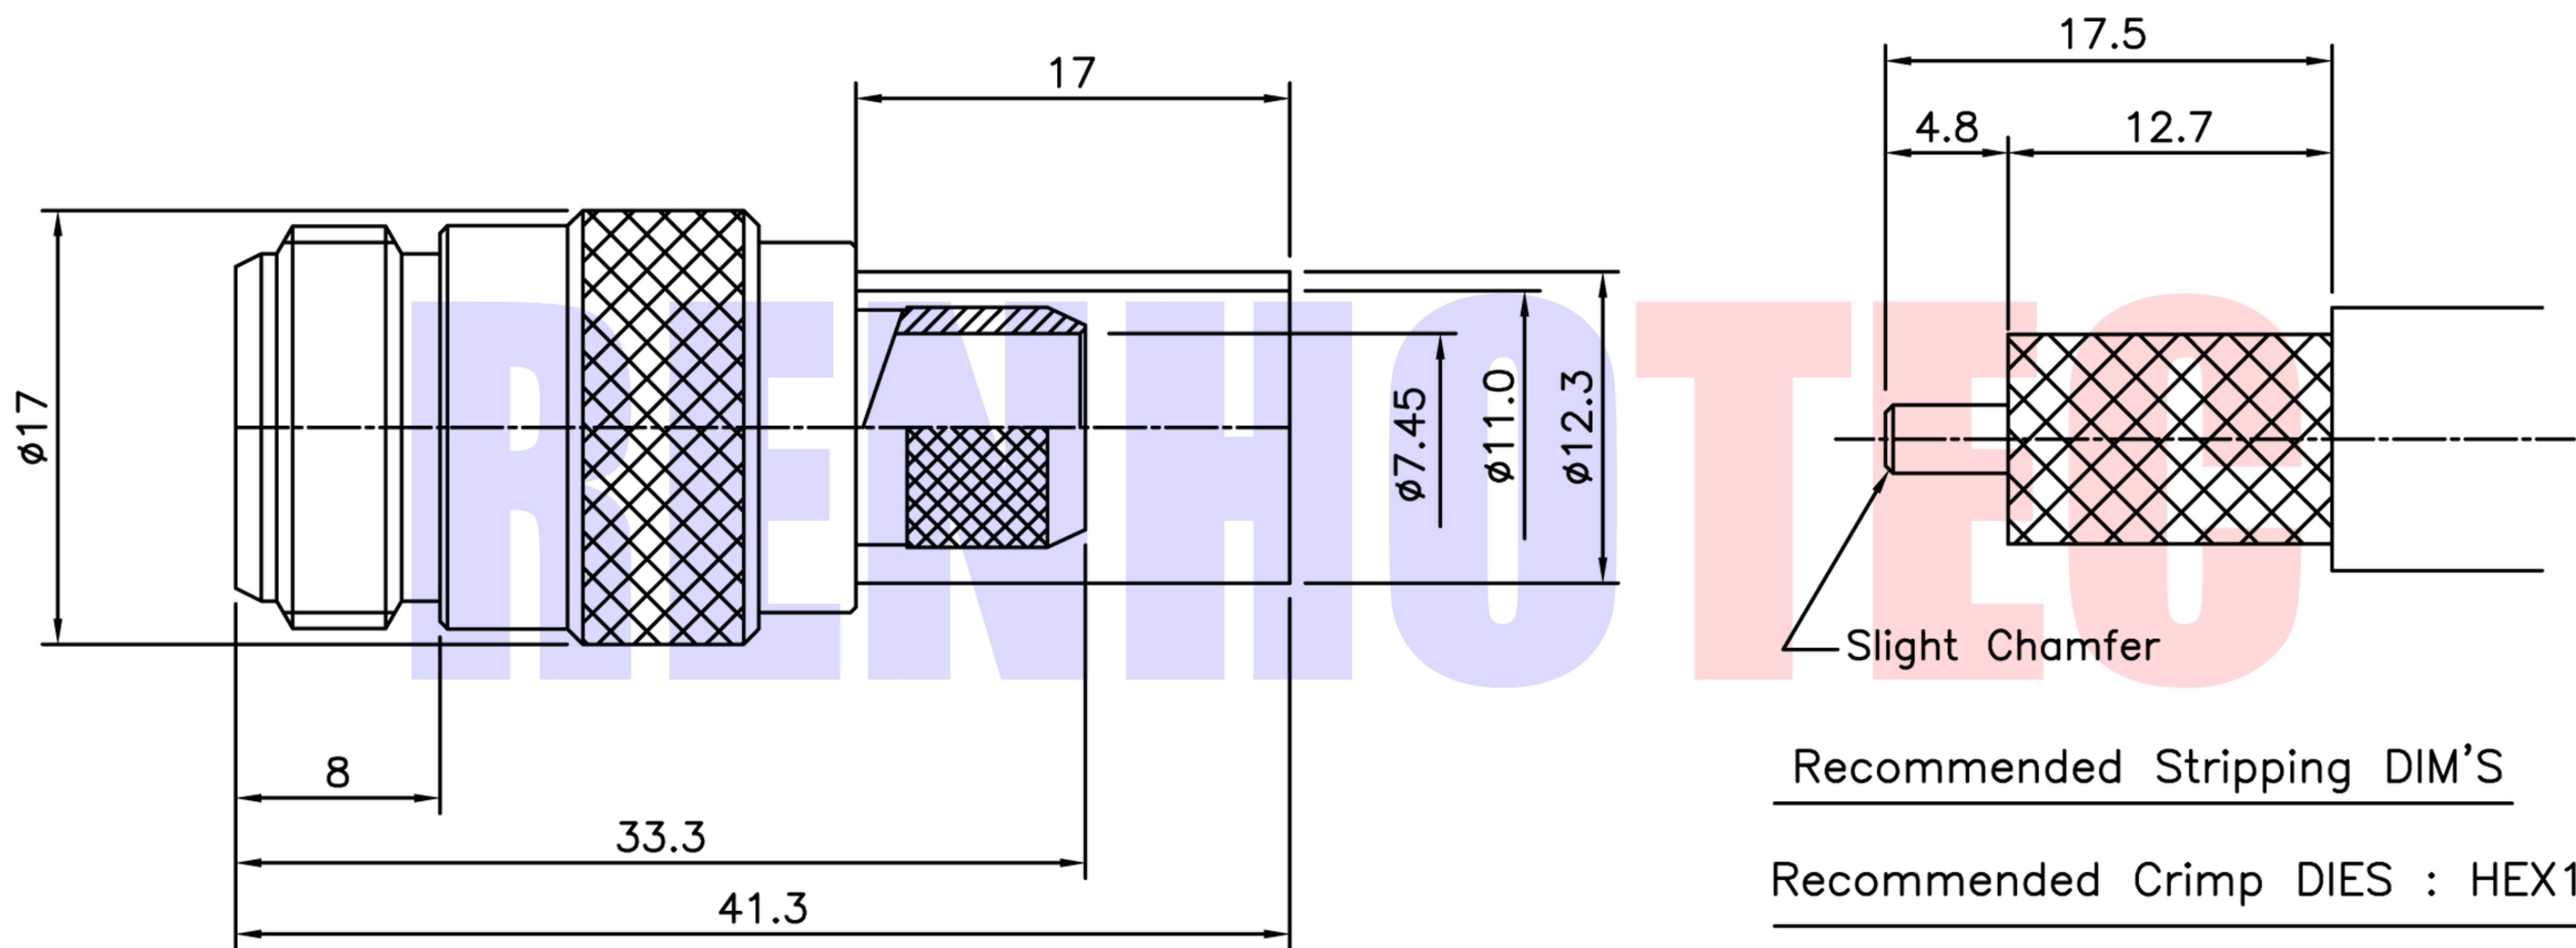

Recommended Stripping DIM'S

Recommended Crimp DIES : HEX10.7

Connector parts	Materials	Finish
Body	Brass	Nickel Plated
Center contact	Be-Cu	Gold Plated
Insulator	TEFLON	-
Ferrule	Brass	Nickel Plated

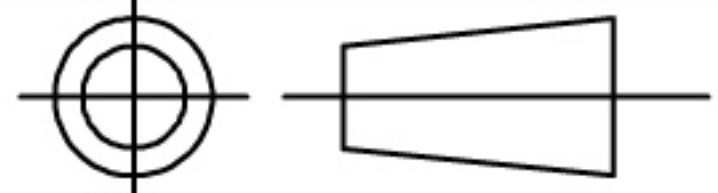NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	 RENHOTEC GROUP		
DRAWN						
Zelin. Zhang	2017/2/27	View		Name: N Type Straight Jack for Cable RG214		
CHECKED		UNIT	MM	SIZE A	Product NO. RHT-614-0113	REV B
APPROVALS		SCALE	1:1	DateTime	CAD FILE	SHEET: 1 OF 1
John Kine	2017/2/27			2017/2/27	D/company drawings/BD	