




SPECIFICATIONS

Impedance ; 50ohm
Frequency ; DC~6GHz
Working Voltage; 1,000 VRMS
VSWR ; max 1.25:1 UP TO 3.0GHz
Temperature range : -55°C to +155°C


Product NO.	Renhotec-614-0114			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/2/27	John kine

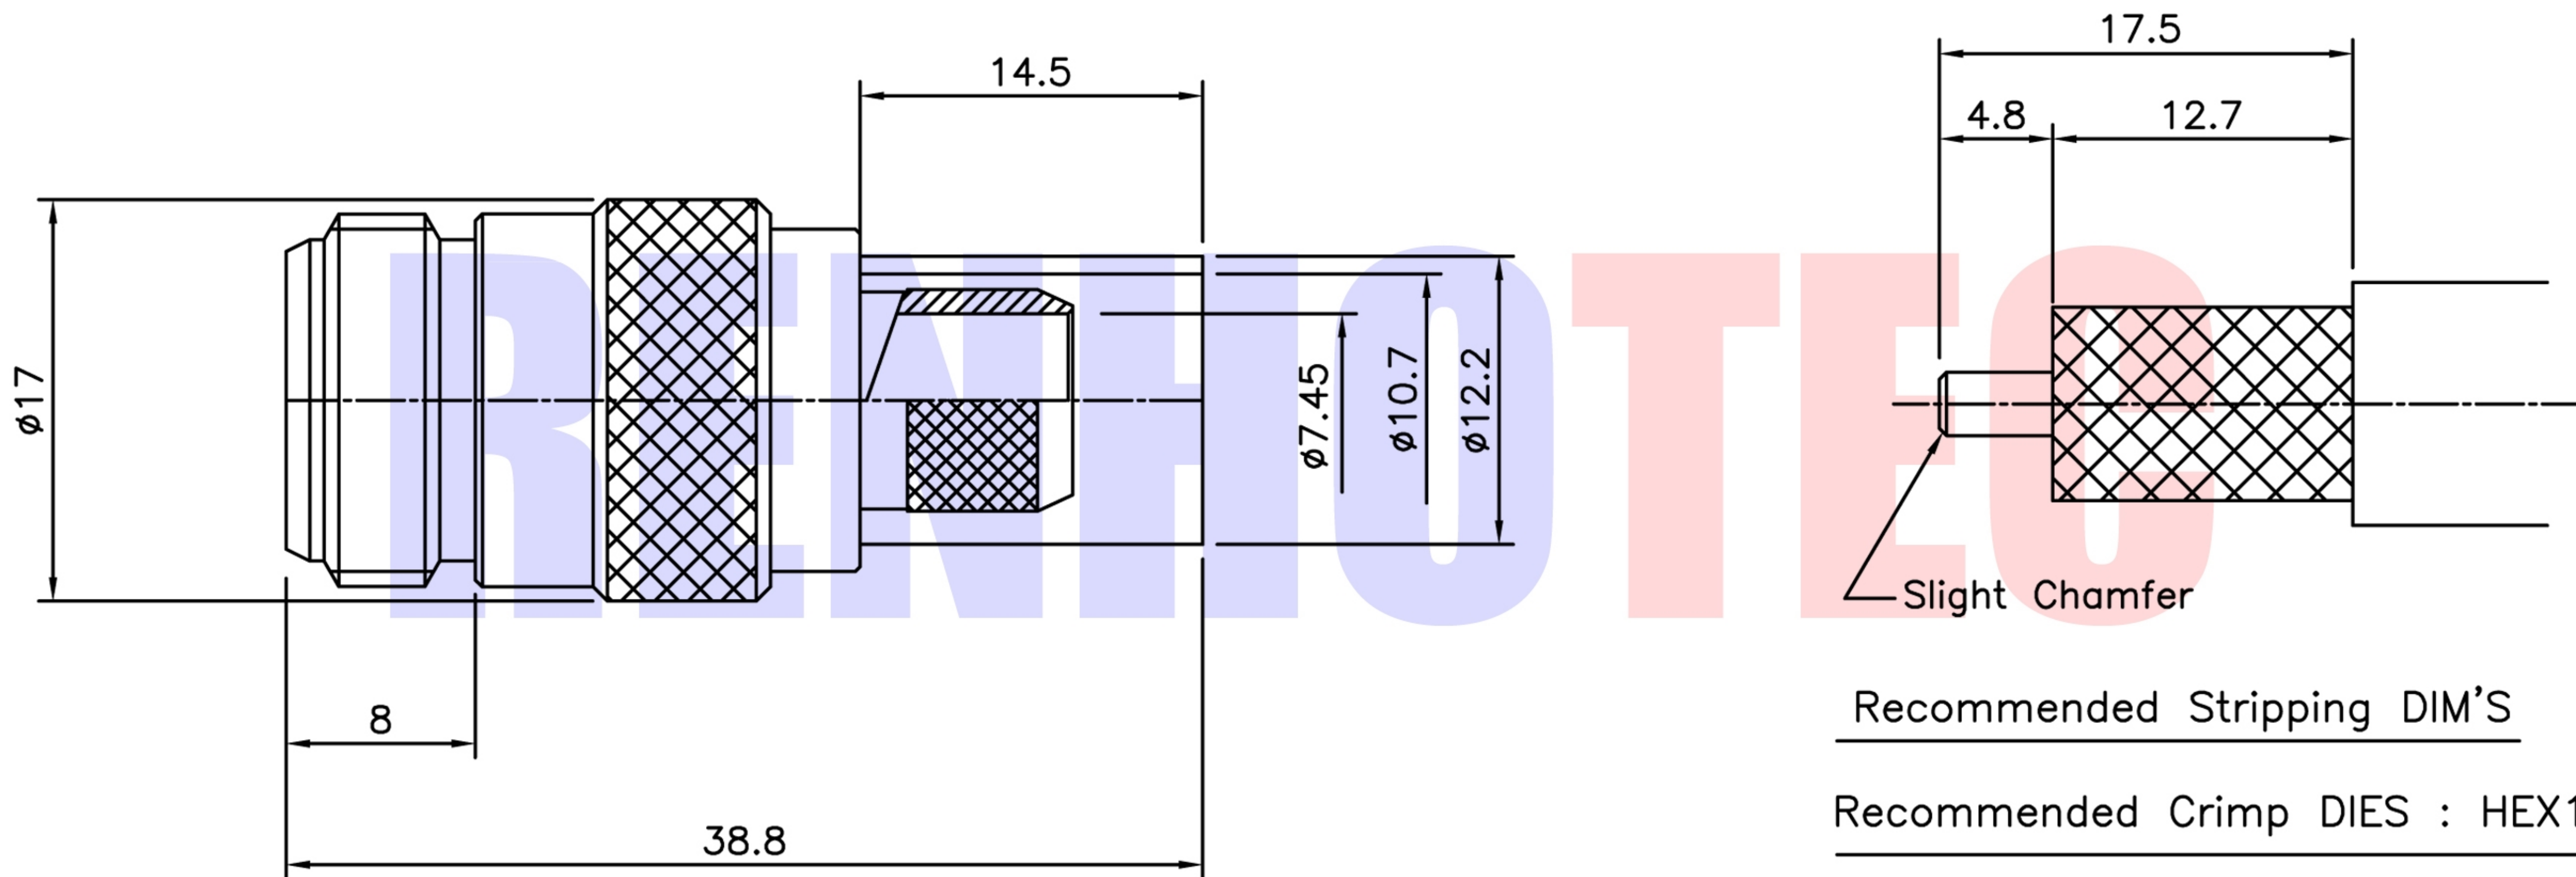

Recommended Stripping DIM'S

Recommended Crimp DIES : HEX10.7

Connector parts	Materials	Finish
Body	Brass	Nickel Plated
Center contact	Be-Cu	Gold Plated
Insulator	TEFLON	-
Ferrule	Brass	Nickel Plated

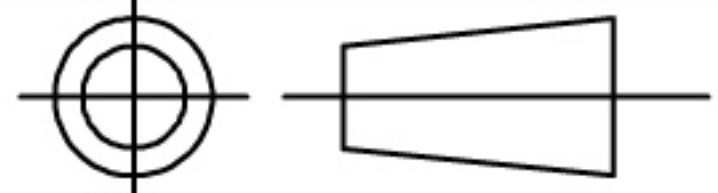NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	 RENHOTE GROUP	
DRAWN					
Zelin. Zhang	2017/2/27	View		Name: N Type Straight Jack for Cable LMR400, RG213	
CHECKED				SIZE A	Product NO. RHT-614-0114
APPROVALS		UNIT	MM	DateTime	CAD FILE
John Kine	2017/2/27	SCALE	1:1	2017/2/27	D/company drawings/BD
				SHEET: 1 OF 1	