




SPECIFICATIONS

Impedance ; 50ohm
Frequency ; DC~6GHz
Working Voltage; 1,000 VRMS
VSWR ; max 1.25:1 UP TO 3.0GHz
Temperature range : -55°C to +155°C

Product NO.	Renhotec-614-0120			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/2/27	John kine

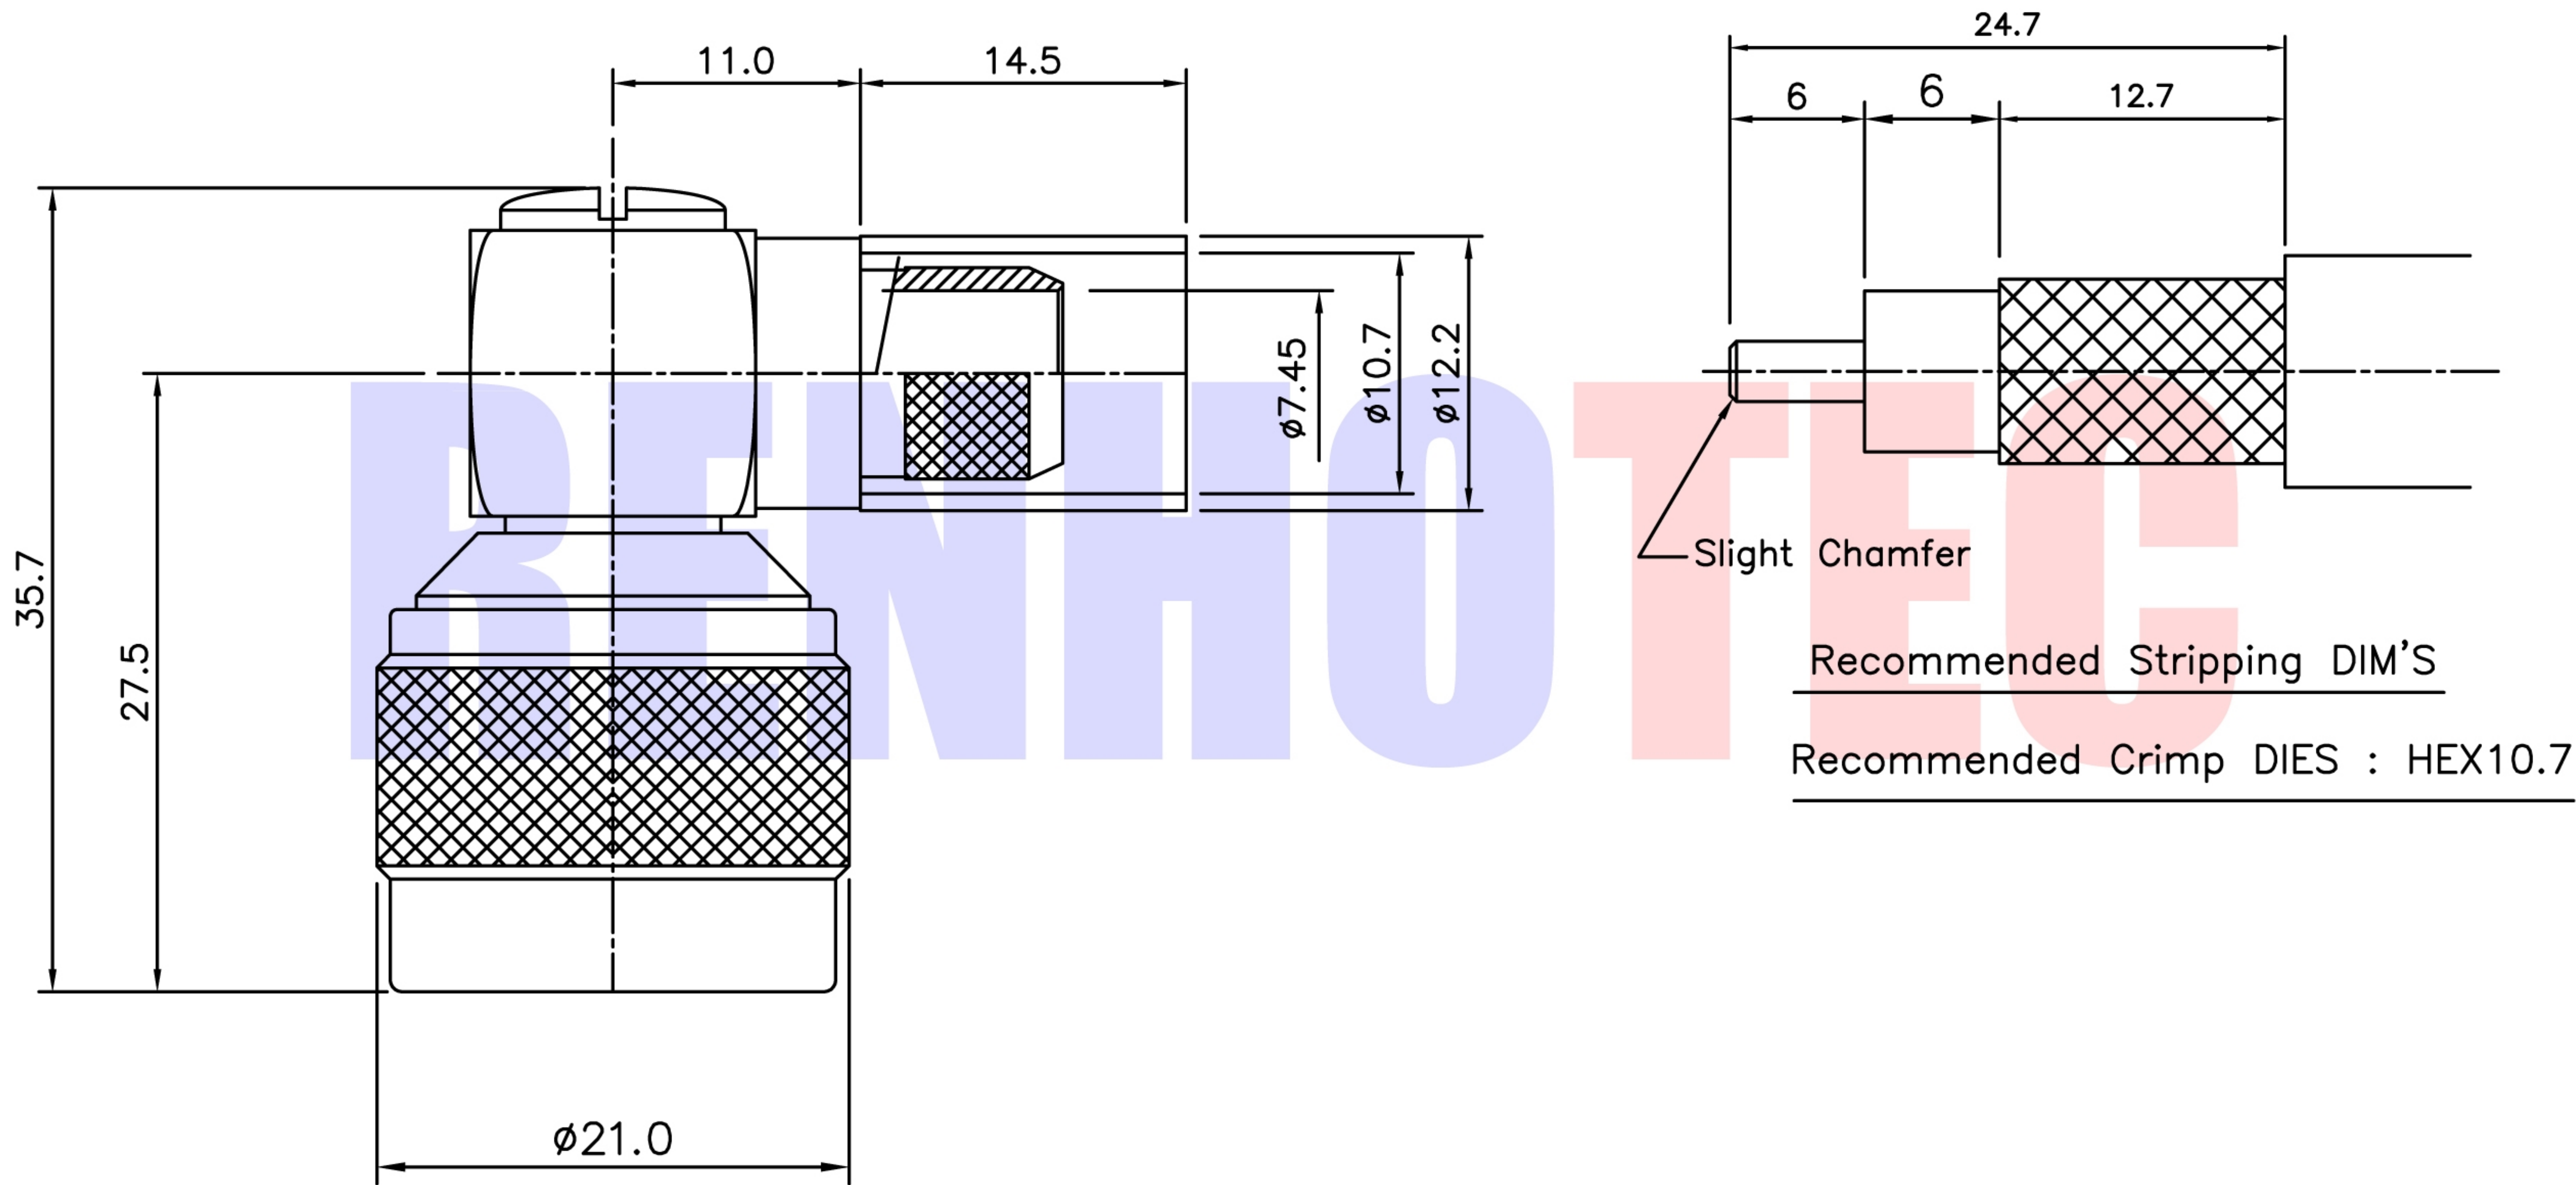

Item	Materials	Plating
Body	Brass	Nickel Plated
Coupling Cap	Brass	Nickel Plated
Center contact	Brass	Gold Plated
Insulator	PTFE	—
Seal	Silicon rubber	—
Ferrule	Brass	Nickel Plated

NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°
DRAWN			
Zelin. Zhang	2017/2/27	View	
CHECKED			
APPROVALS		UNIT	MM
John Kine	2017/2/27	SCALE	1:1



RENHOTEC GROUP

Name: R/A Crimp N Plug for LMR400, RG213

SIZE A	Product NO. RHT-614-0120	REV B
DateTime 2017/2/27	CAD FILE D/company drawings/BD	SHEET: 1 OF 1