




Product NO.

RHT-614-0121

REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Gavin	2019/02/13	JIM. KING

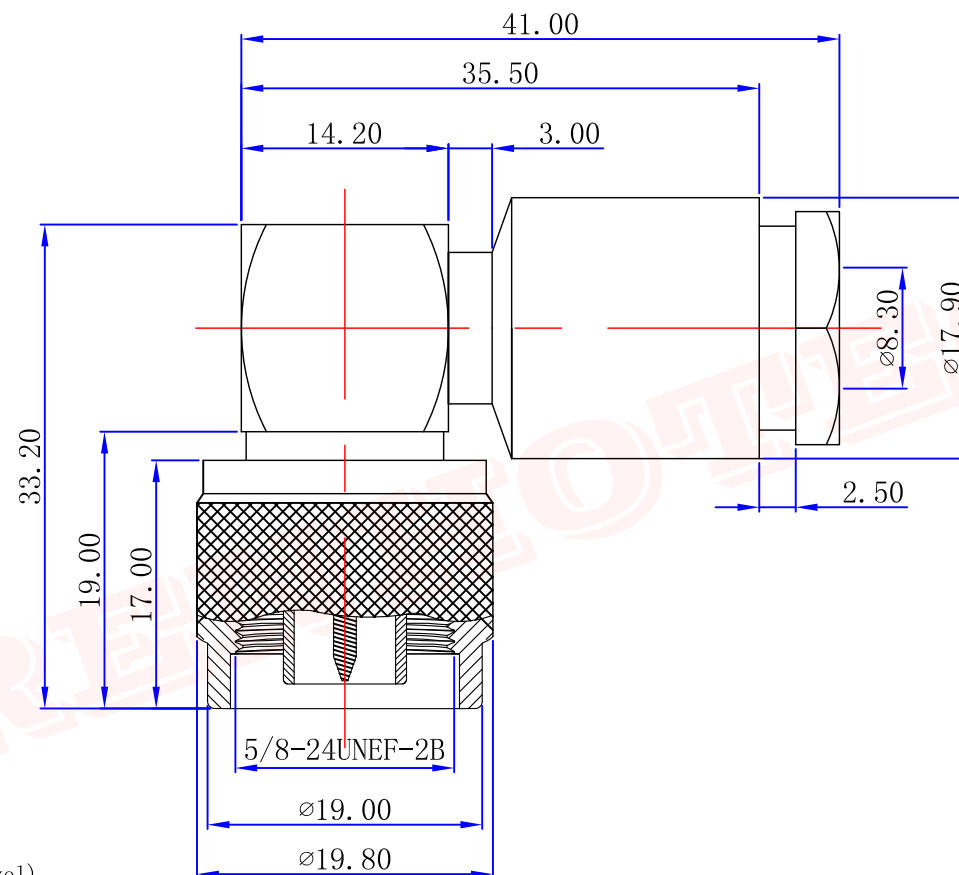

Specifications

Impedance: 50 Ohms

Frequency Range: 0-11G

VSWR: 1.3MAX

Working Voltage: 1000 VRMS (max at sea level)

Dielectric Withstanding Voltage: 1500 vrms (max at sea level)

Insulation Resistance: 5000 Ohms min

Durability Mating: 500 Cycles min

Temperature Range: -65°C TO +165°C


NO	DESCRIPTION	MATERIAL	FINISH	QTY
3	PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	WHITE	1
1	BOOY	BRASS	NICKEL	1

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm$ 0.20mm
8 - 30mm $\pm$ 0.25mm
30 - 120mm $\pm$ 0.30mm



RENHOTEC GROUP



PART DESCRIPTION:
R/A N PLUG FOR 1/4 CABLE

Appd: JIM. KING

P/N: RHT-614-0121

Check:

Date

Scale

Unit

Type

Page

Draw:

Gavin

2019. 02. 13

Free

MM

Z

1/1