



ELECTRICAL DATA

Impedance: 50 ohm

Frequency Range: DC~11.0GHz


V.S.W.R : 1.5:1 max.

Dilectric withstanding voltage : 750rms,50Hz


Insulation resistance: 5000 ohm

Temperature Range: -55°c to +125°c

Product NO.	Renhotec-614-0141			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/2/28	John kine

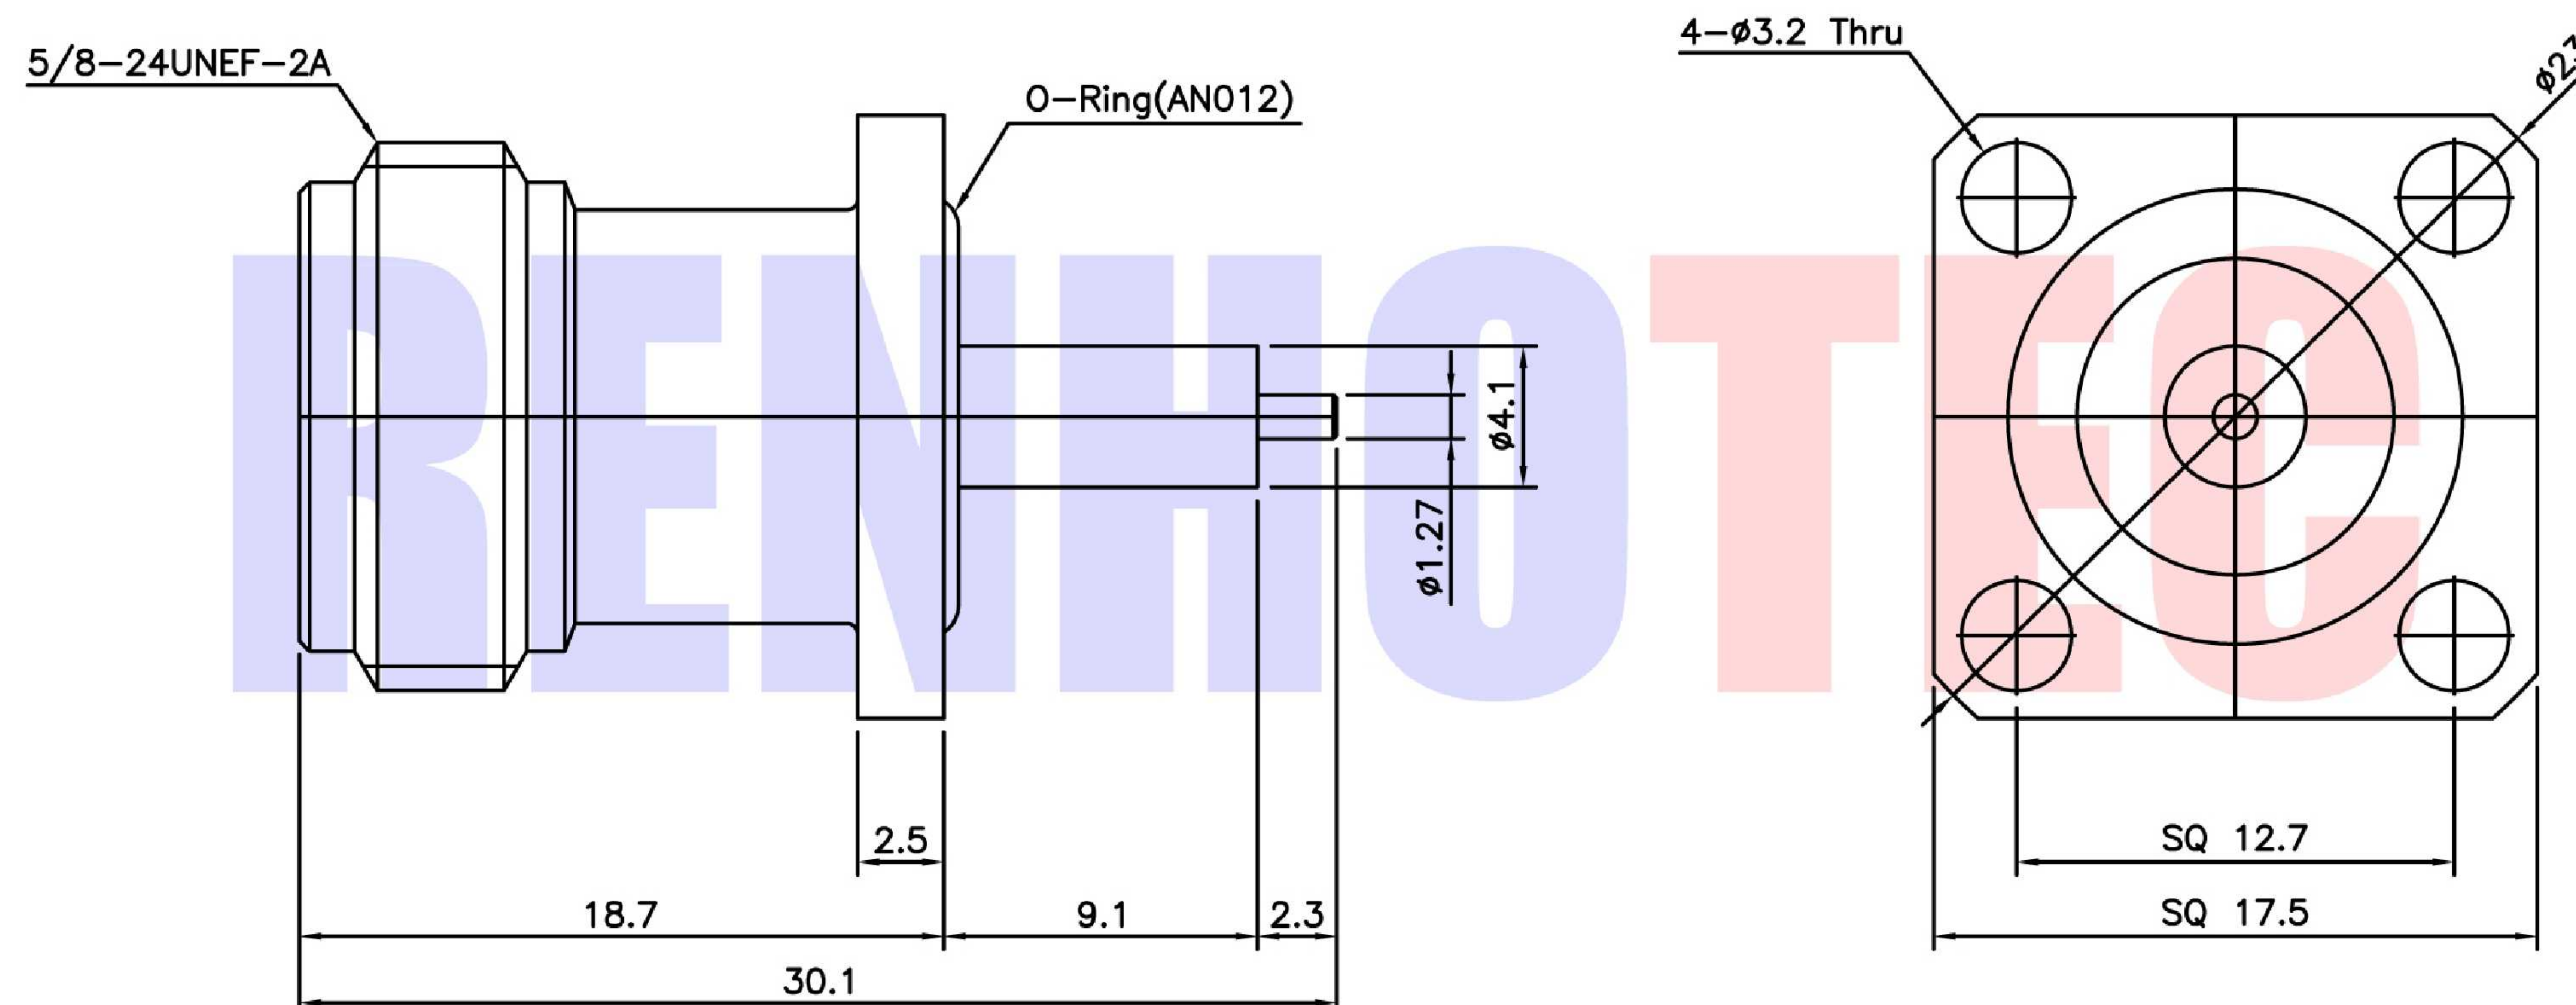

Connector parts	Materials	Finish
Body	Brass	Nickel Plated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-
O-Ring	Silicon rubber	-

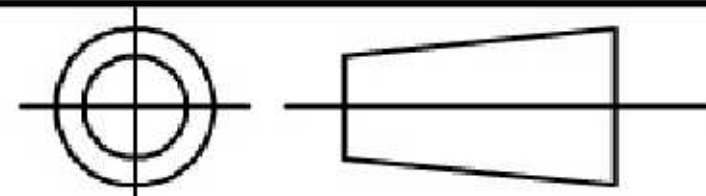NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	 RENHOTEC GROUP		
DRAWN						
Zelin. Zhang	2017/2/28	View		Name: N Type Panel Receptacle Jack 4Holes with Seal		
CHECKED				SIZE A	Product NO. RHT-614-0141	REV B
APPROVALS		SCALE	1:1	DateTime	CAD FILE	SHEET: 1 OF 1
John Kine	2017/2/28			2017/2/28	D/company drawings/BD	