

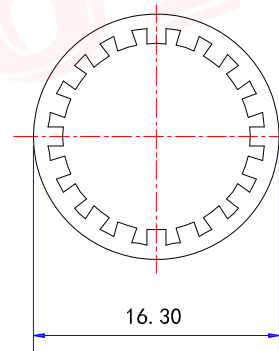
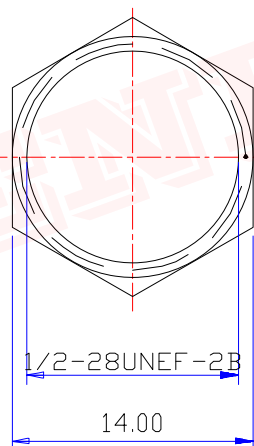
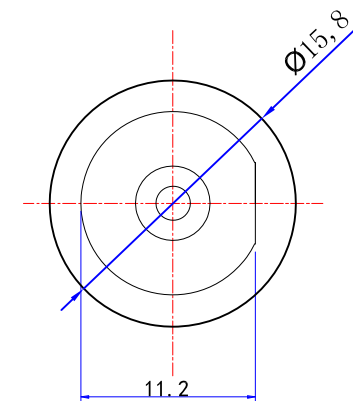




Product NO.

RHT-615-0008

| REV | DESCRIPTION | DWN   | DATE       | APPROVEN  |
|-----|-------------|-------|------------|-----------|
| A   | First issue | Gavin | 2019/04/30 | JIM. KING |
|     |             |       |            |           |

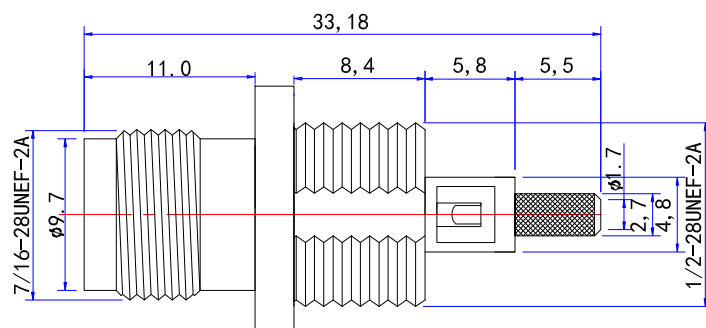

### Specifications

Impedance: 50 Ohms

Frequency Range: DC~6G

VSWR: 1.5MAX

Working Voltage: 500V rms @ sea level

Insulation Resistance: 5000 Ohms min

Temperature Range: -65°C TO +165°C

Relative Temperature: ≤95% (40° C ±2° C)

Drawings products are in line with ROHS standards


| NO | DESCRIPTION | MATERIAL | FINISH  | QTY |
|----|-------------|----------|---------|-----|
| 7  | FERRULE     | COPPER   | NEXCOTE | 1   |
| 6  | GASKET      | SILICONE | RED     | 1   |
| 5  | HEX NUT     | BRASS    | NEXCOTE | 1   |
| 3  | PIN         | BRASS    | GOLD    | 1   |
| 2  | INSULATOR   | TEFLON   | None    | 1   |
| 1  | BOOY        | BRASS    | NICKEL  | 1   |

-TOLERANCES-  
UNLESS OTHERWISE  
SPECIFIED

UNLESS OTHERWISE SPECIFIED  
TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.25mm  
30 - 120mm ± 0.30mm



# RENHOTEC GROUP



Appd: JIM. KING

Check:

Draw: Gavin

PART DESCRIPTION:  
TNC JACK FOR RG316 CABLE

P/N: RHT-615-0008

| Date         | Scale | Unit | Type | Page |
|--------------|-------|------|------|------|
| 2019. 04. 30 | Free  | MM   | Z    | 1/1  |