





SPECIFICATIONS


- 1. Impedance : 50Ω
- 2. Frequency range : DC~4.0GHz
- 3. Contact current : DC 3.5A max.
- 4. Voltage rating : 250Vrms
- 5. Contact resistance : Center contacts : 2.0mΩ
Outer contacts : 0.2mΩ
- 6. Insulation resistance : 5,000MΩmin.
- 7. Temperature Range : -65°C ~ +165°C
- 8. V.S.W.R : ≤1.25

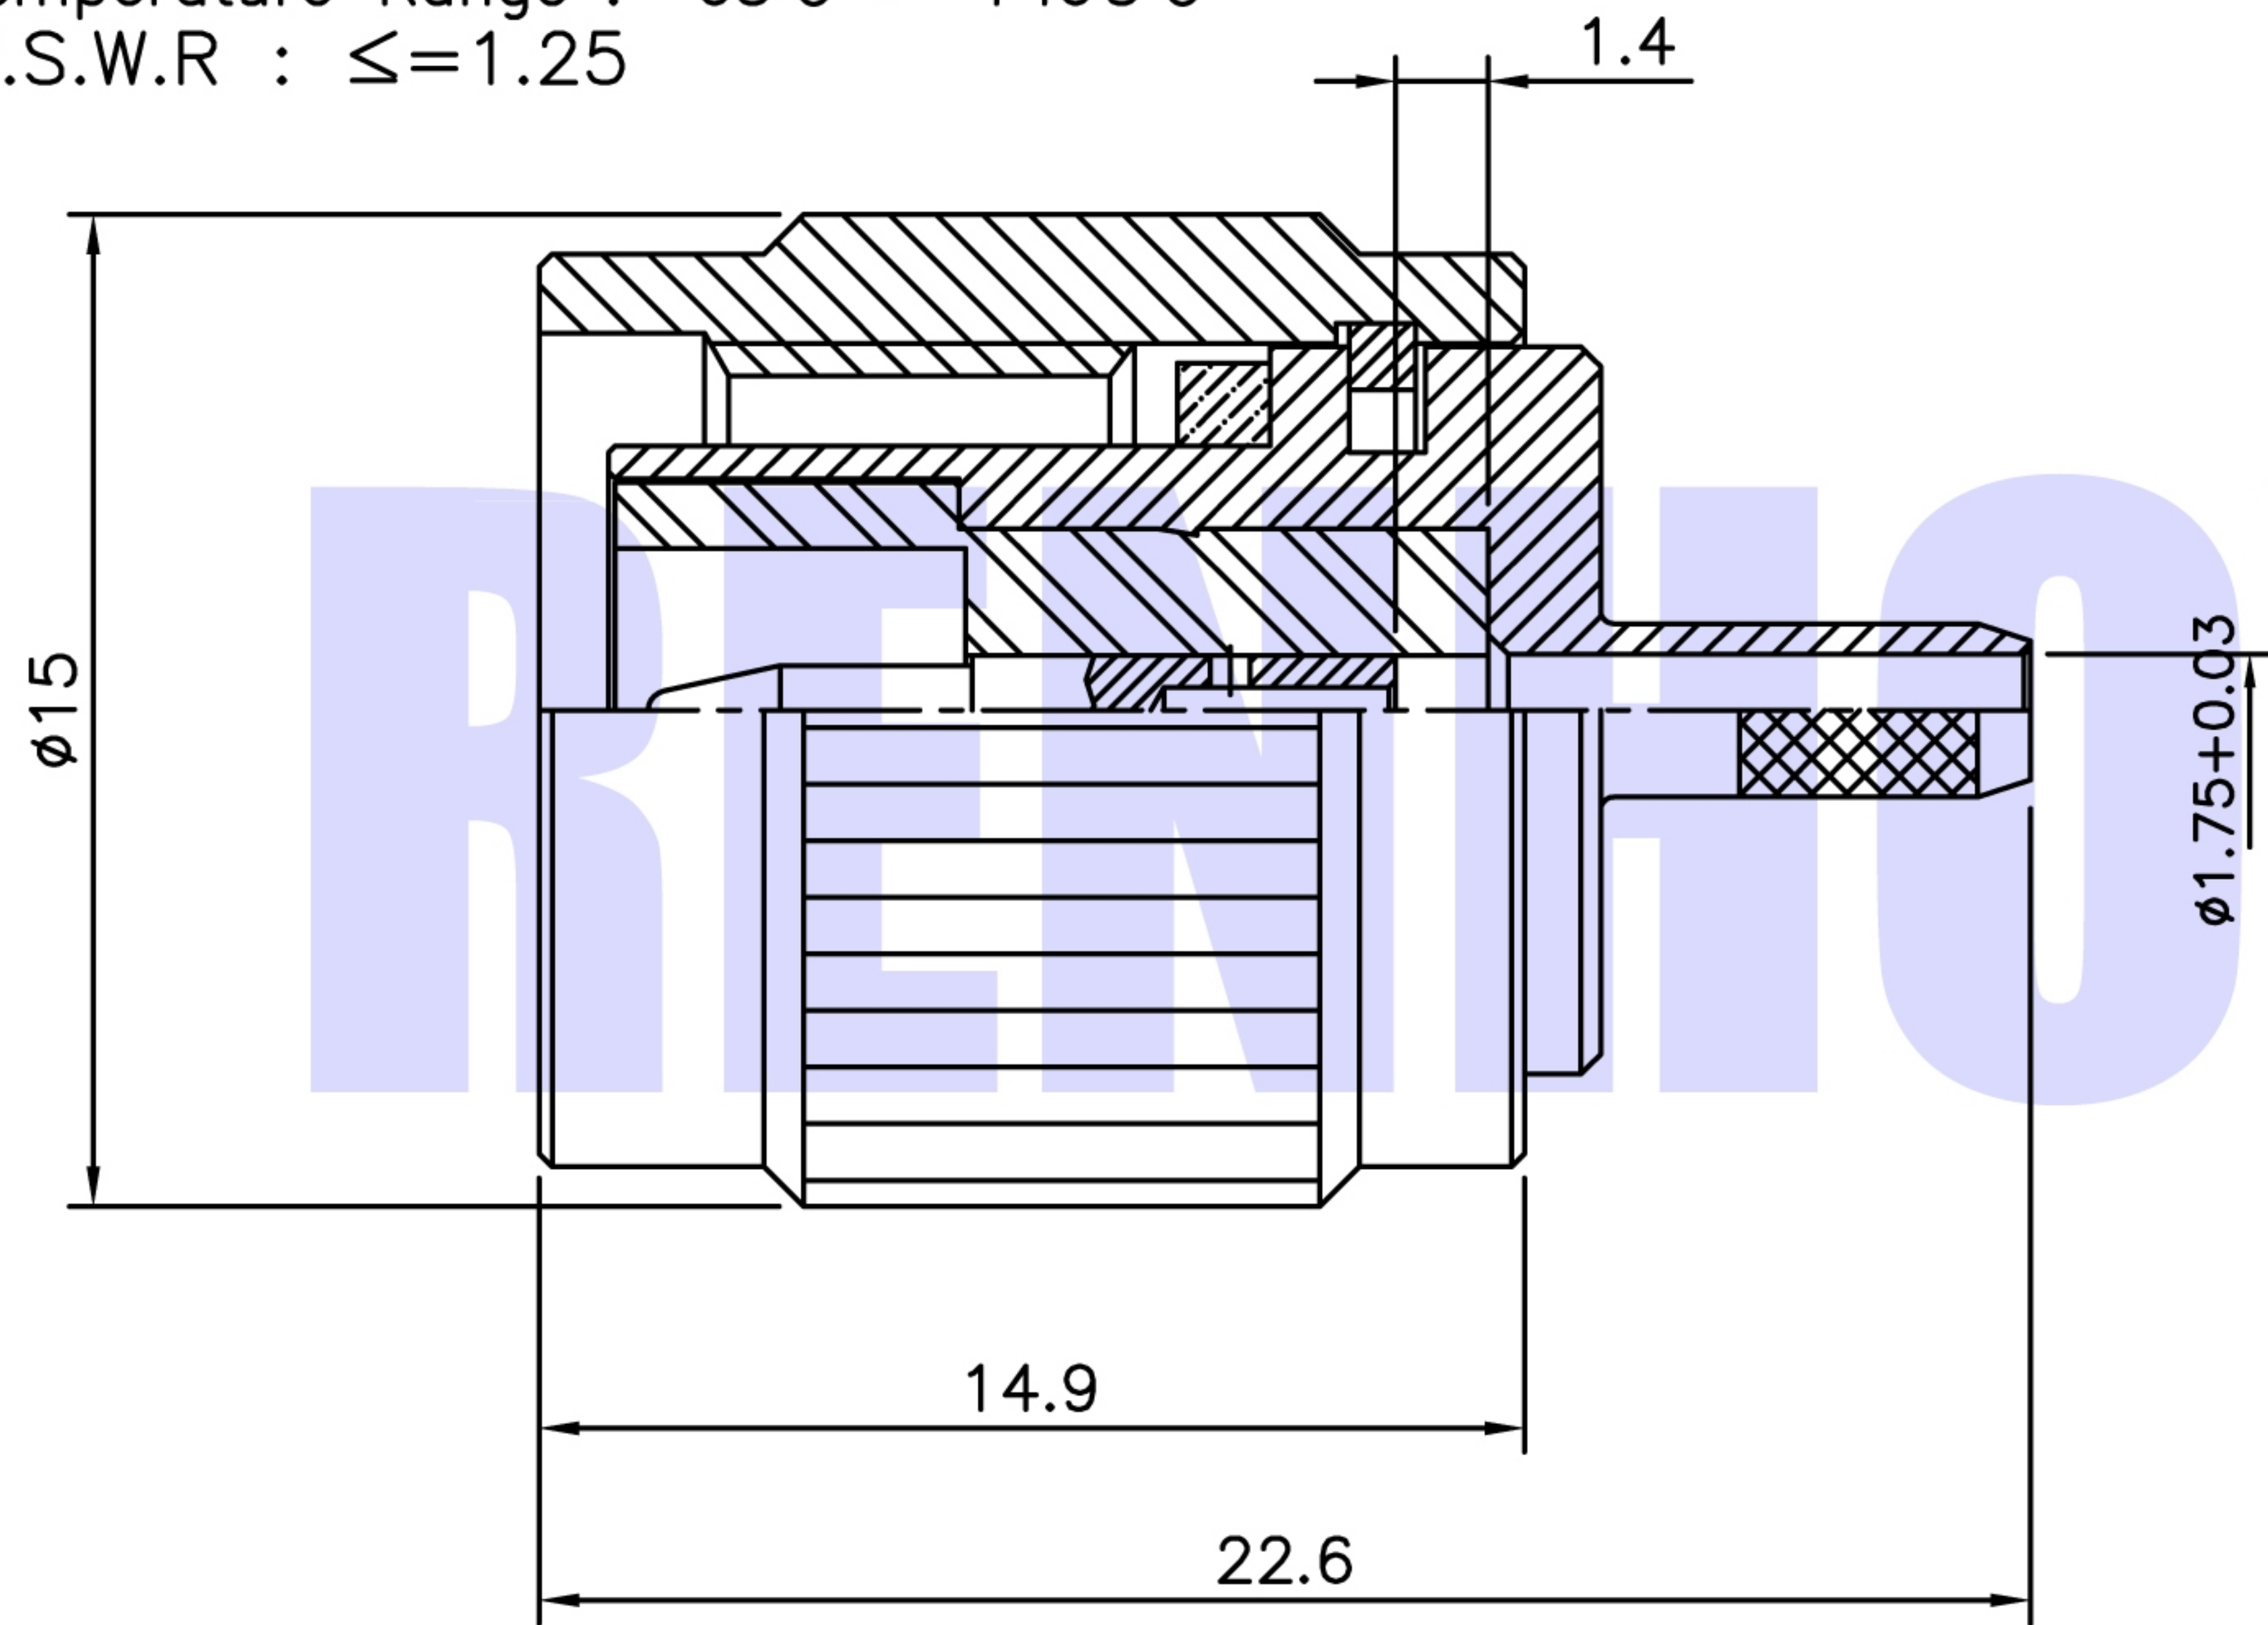

Product NO.	Renhotec-615-0204			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/7	John kine

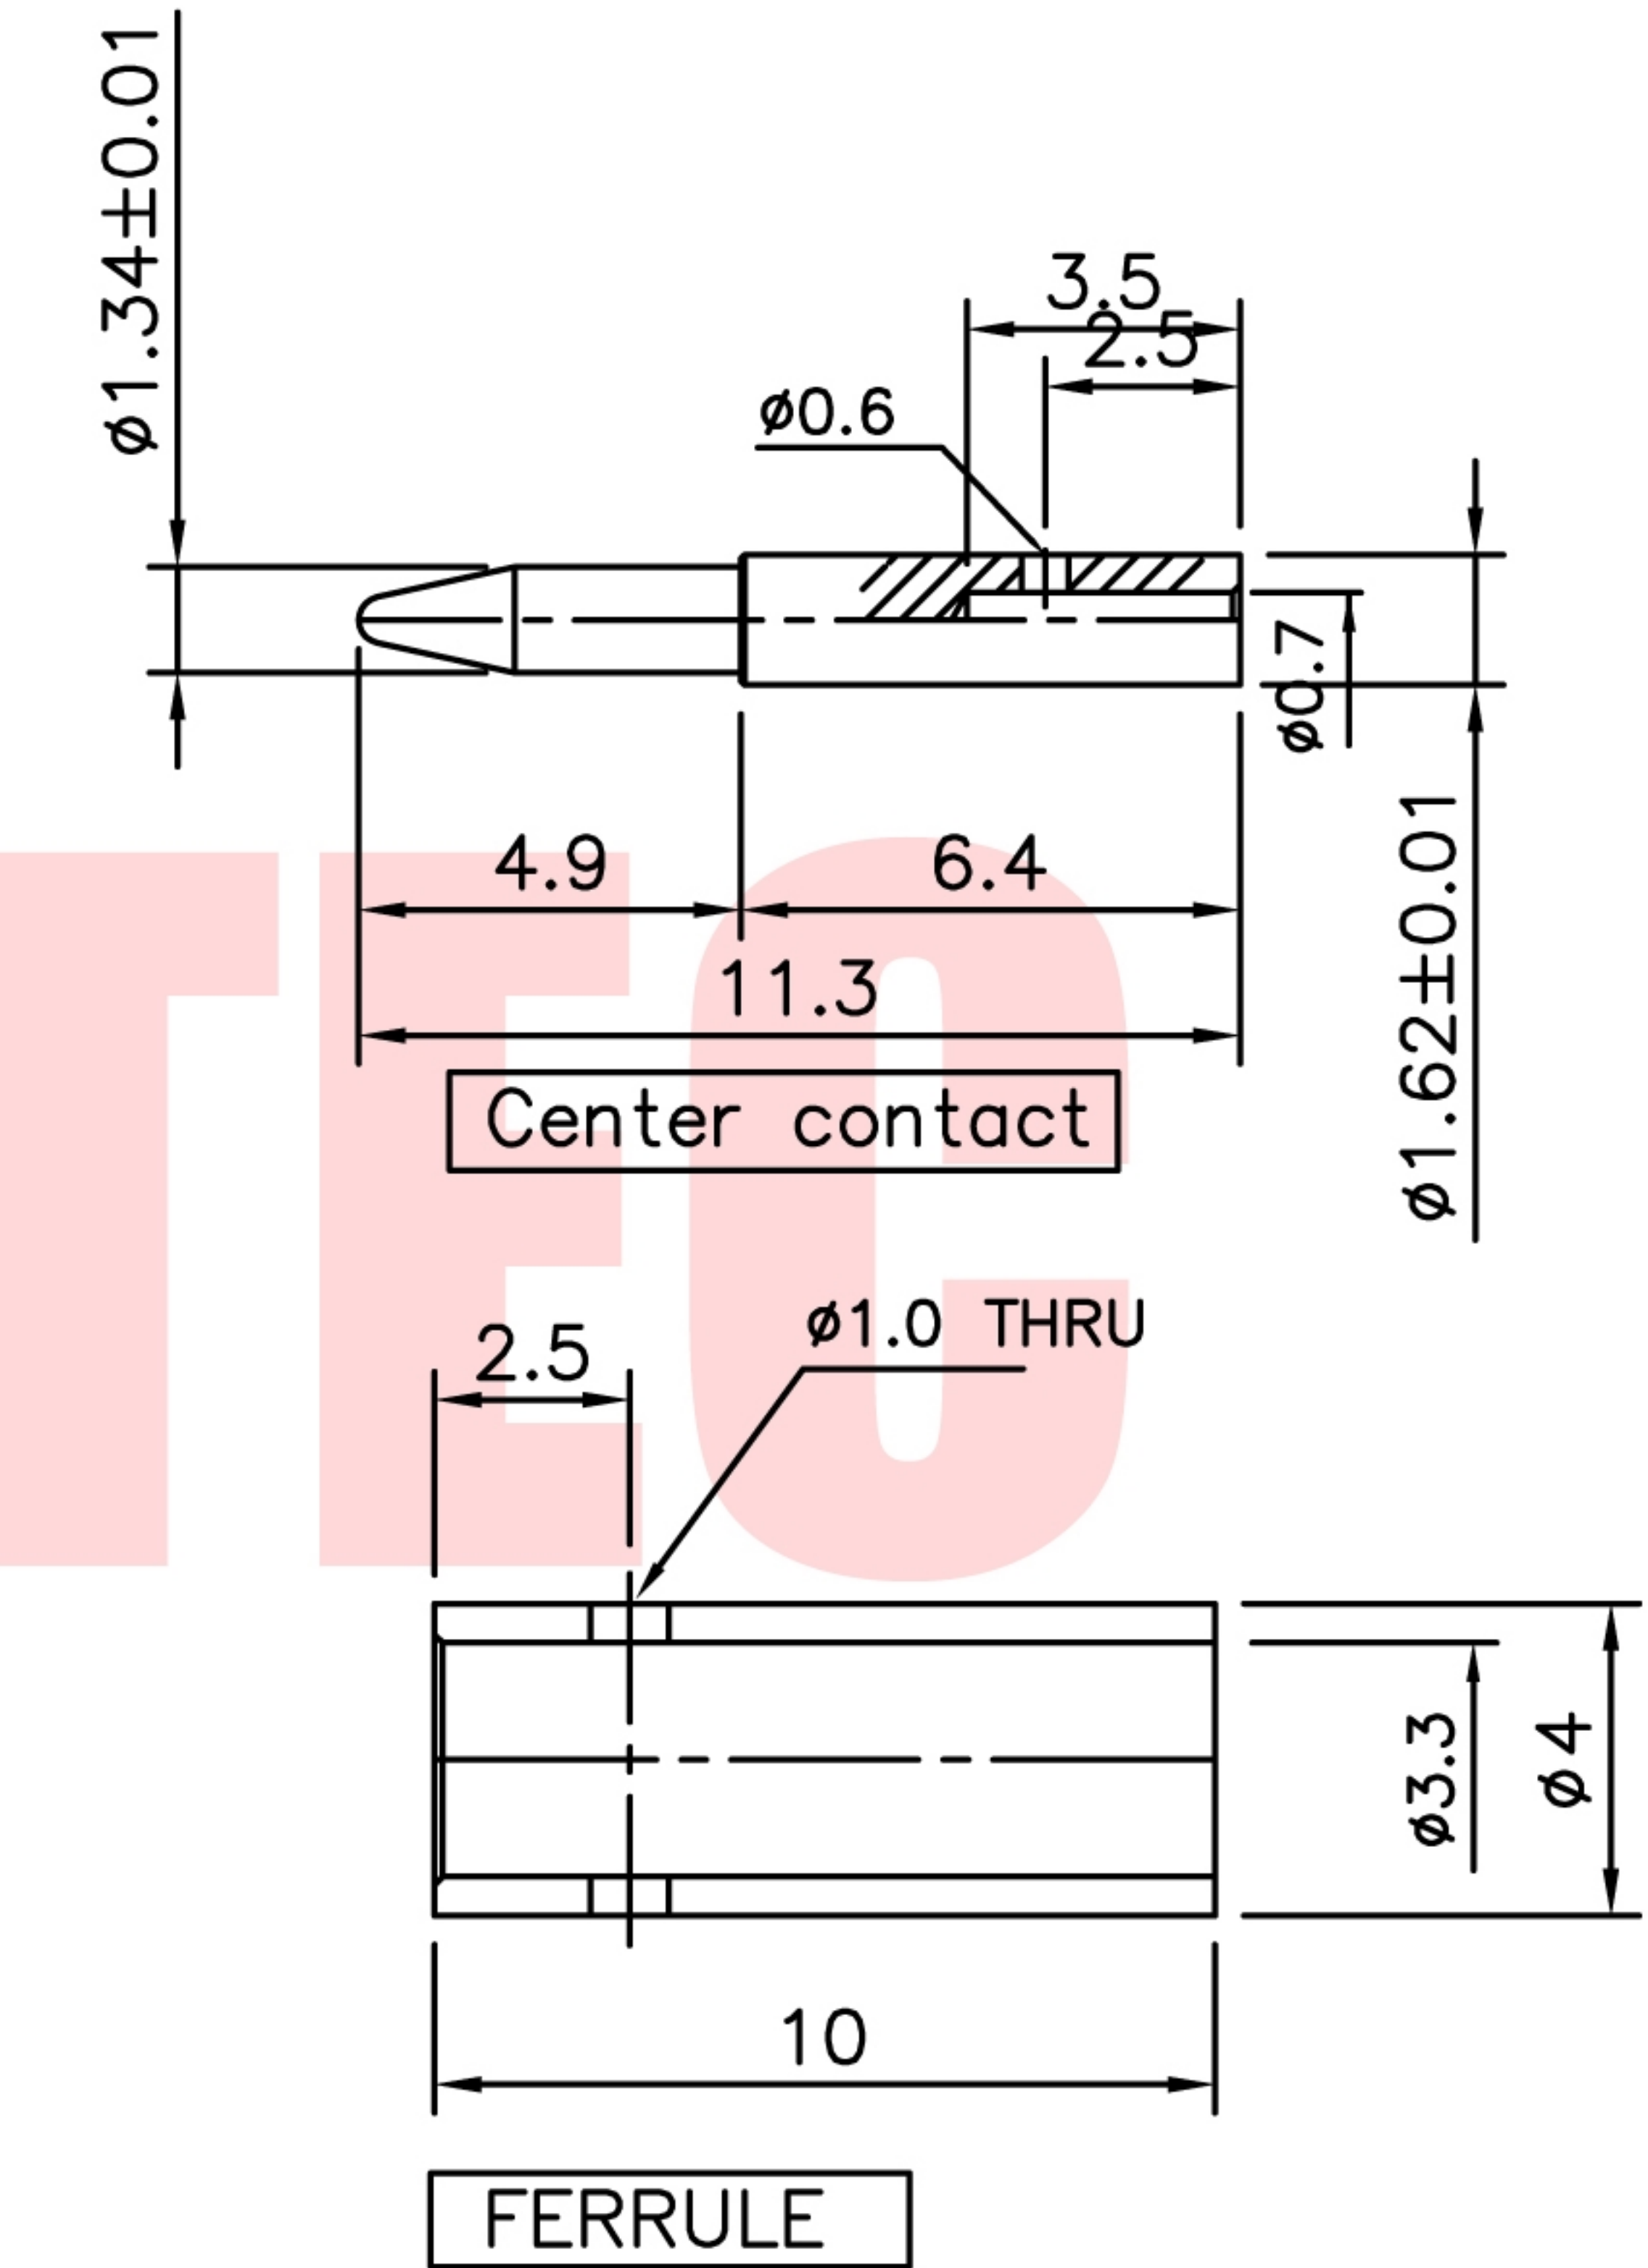

Connector parts	Materials	Finish
Coupling Cap	Brass	Nickel Plated
Body	Brass	Nickel Plated
Center contact	Brass	Gold Plated
Ferrule	Brass	Nickel Plated
Insulator	PTFE	-
Gasket	Silicon rubber	-

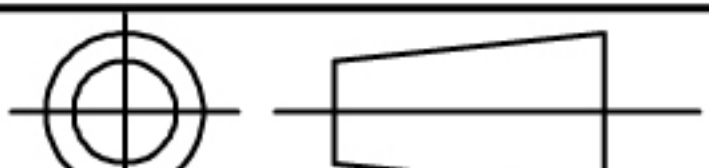NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	 RENHOTEC GROUP				
DRAWN	2017/3/7			View		Name: TNC Straight Plug for Cable RG316D		
Zelin. Zhang						SIZE A	Product NO. RHT-615-0204	
CHECKED		UNIT	MM					
APPROVALS		SCALE	1:1	DateTime		CAD FILE	SHEET: 1 OF 1	
				2017/3/7		D/company drawings/BD		
2017/3/7								