




SPECIFICATIONS

1. Impedance : 50Ω
2. Frequency range : DC~11GHz
3. Contact current : DC 3.5A max.
4. Voltage rating : 250Vrms
5. Contact resistance : Center contacts : 2.0mΩ
Outer contacts : 0.2mΩ
6. Insulation resistance : 5,000MΩmin.
7. Temperature Range : -65°C ~ +165°C
8. V.S.W.R : ≤1.25

Product NO.	Renhotec-615-0206			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/7	John kine

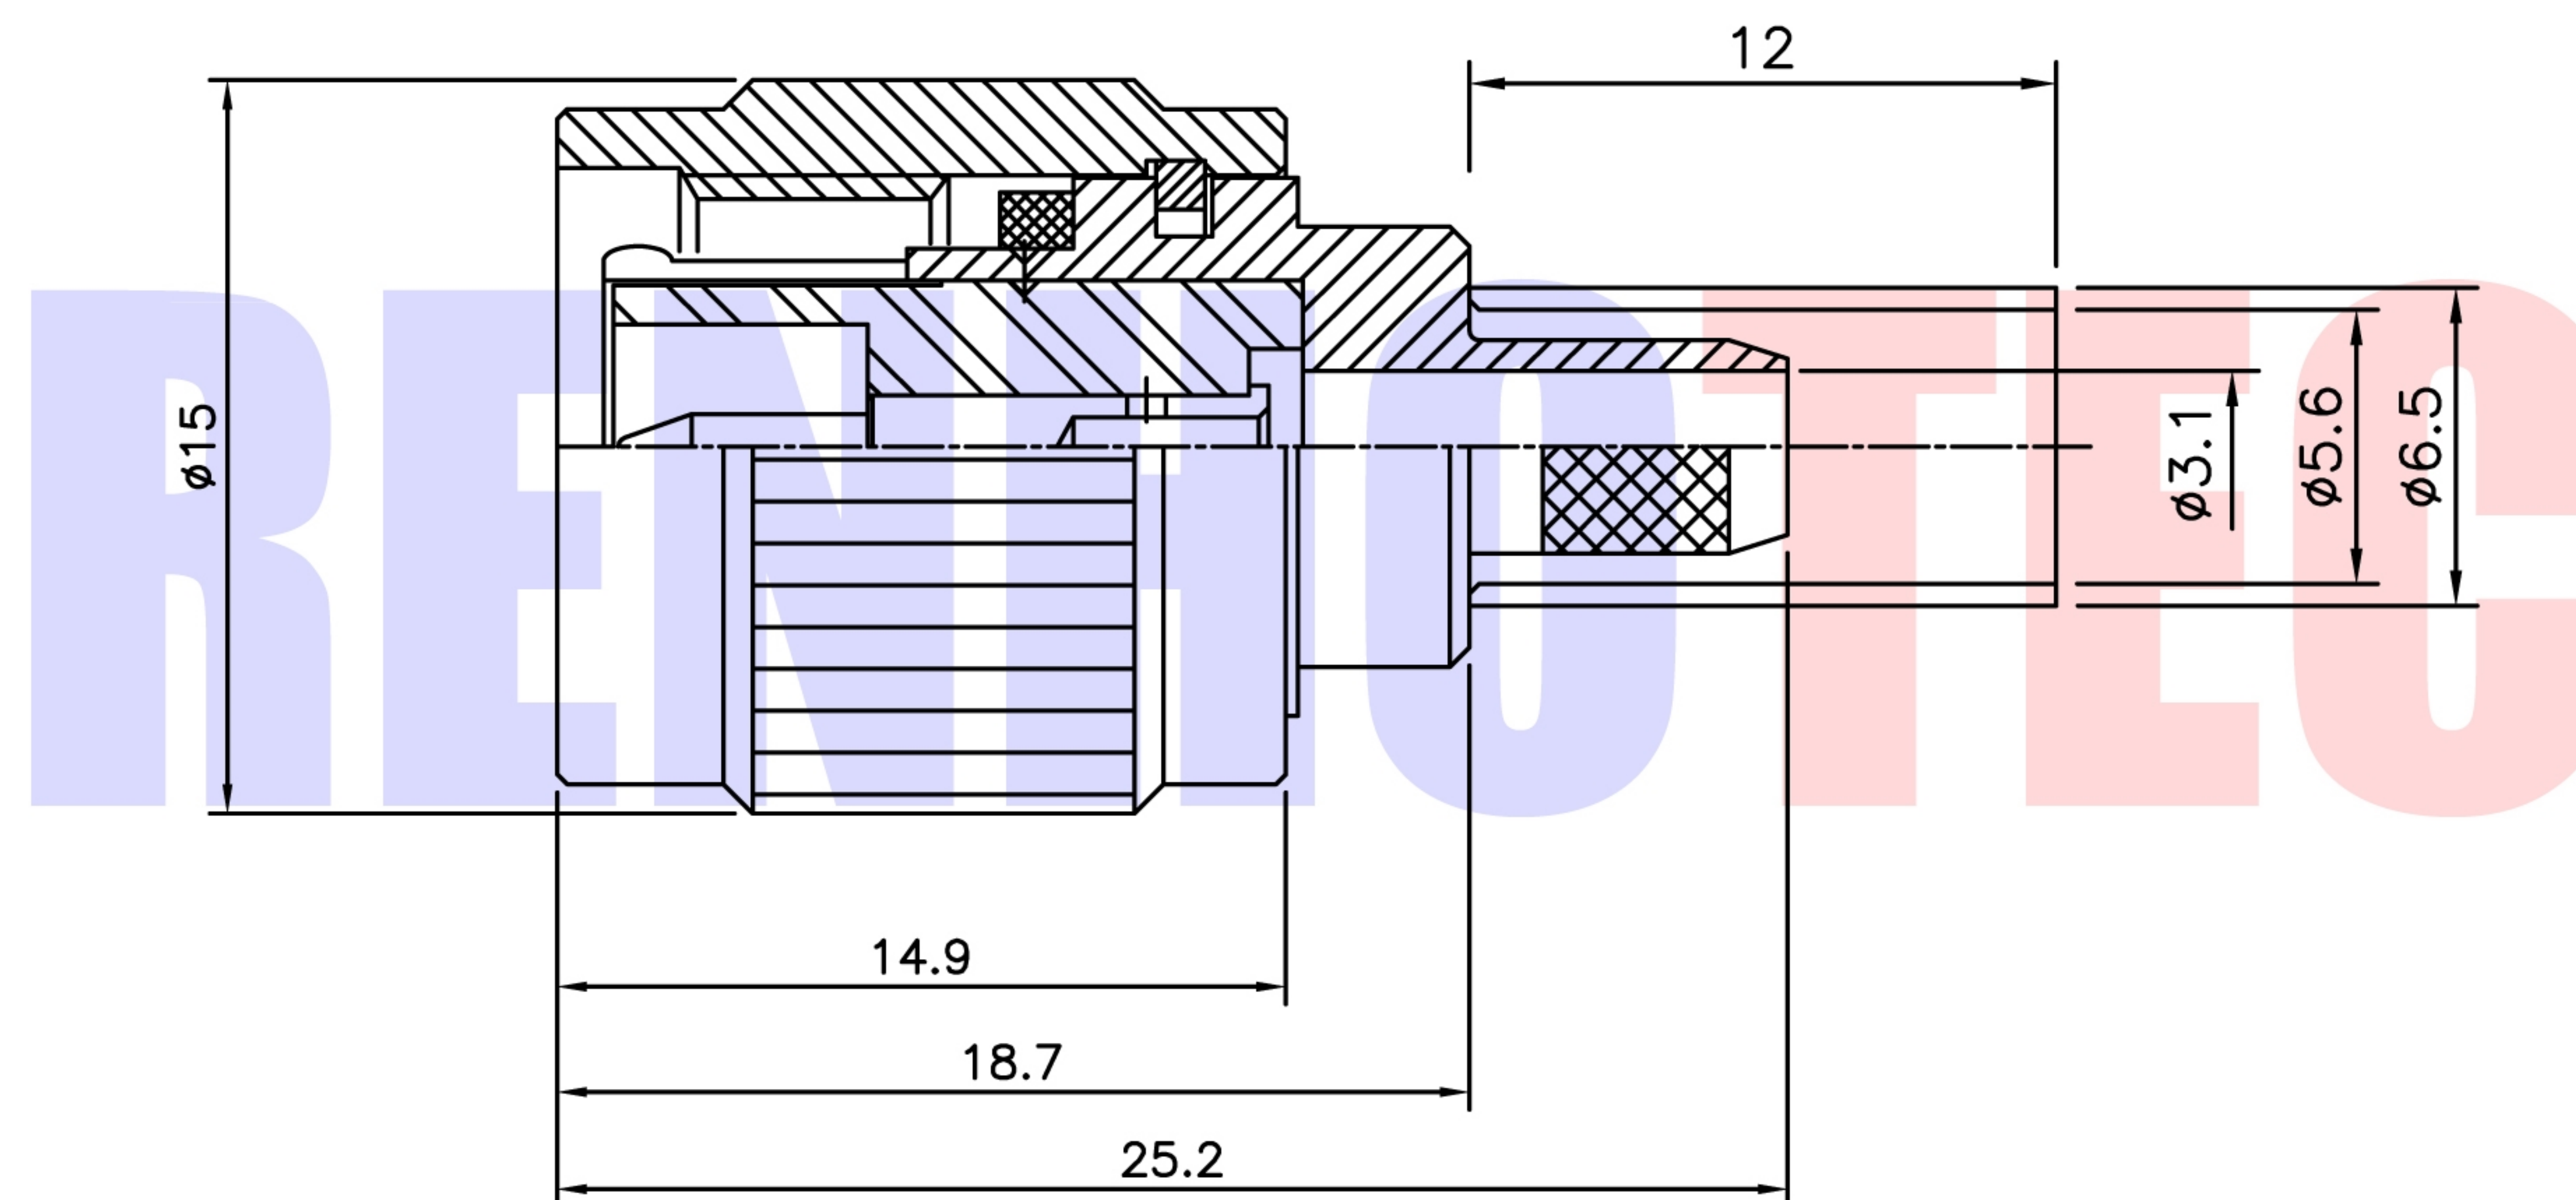

Connector parts	Materials	Finish
Coupling Cap	Brass	Nickel Plated
Body	Brass	Nickel Plated
Center contact	Brass	Gold Plated
Insulator	TEFLON	—
Ferrule	Brass	Nickel Plated
Gasket	Silicone rubber	—

NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	RENHOTEC RENHOTECH GROUP www.renhotec.com		
DRAWN						
Zelin. Zhang	2017/3/7	View		Name: TNC Straight Plug for Cable RG400.142		
CHECKED		UNIT	MM	SIZE A	Product NO. RHT-615-0206	REV B
APPROVALS		SCALE	1:1	DateTime	CAD FILE	SHEET: 1 OF 1
John Kine	2017/3/7			2017/3/7	D/company drawings/BD	