





SPECIFICATIONS;
Impedance : 50 Ohms
Frequency Range : DC~11 GHz
VSWR: 1.3:1@ 2GHz 2.0@11GHz
Insertion loss : 0.07x √F(GHz)
Voltage rating : 335 VRMS
Insulation Resistance : 5000 meghms
Temperature Range : -55~155°C

Product NO.	Renhotec-615-0211			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/7	John kine

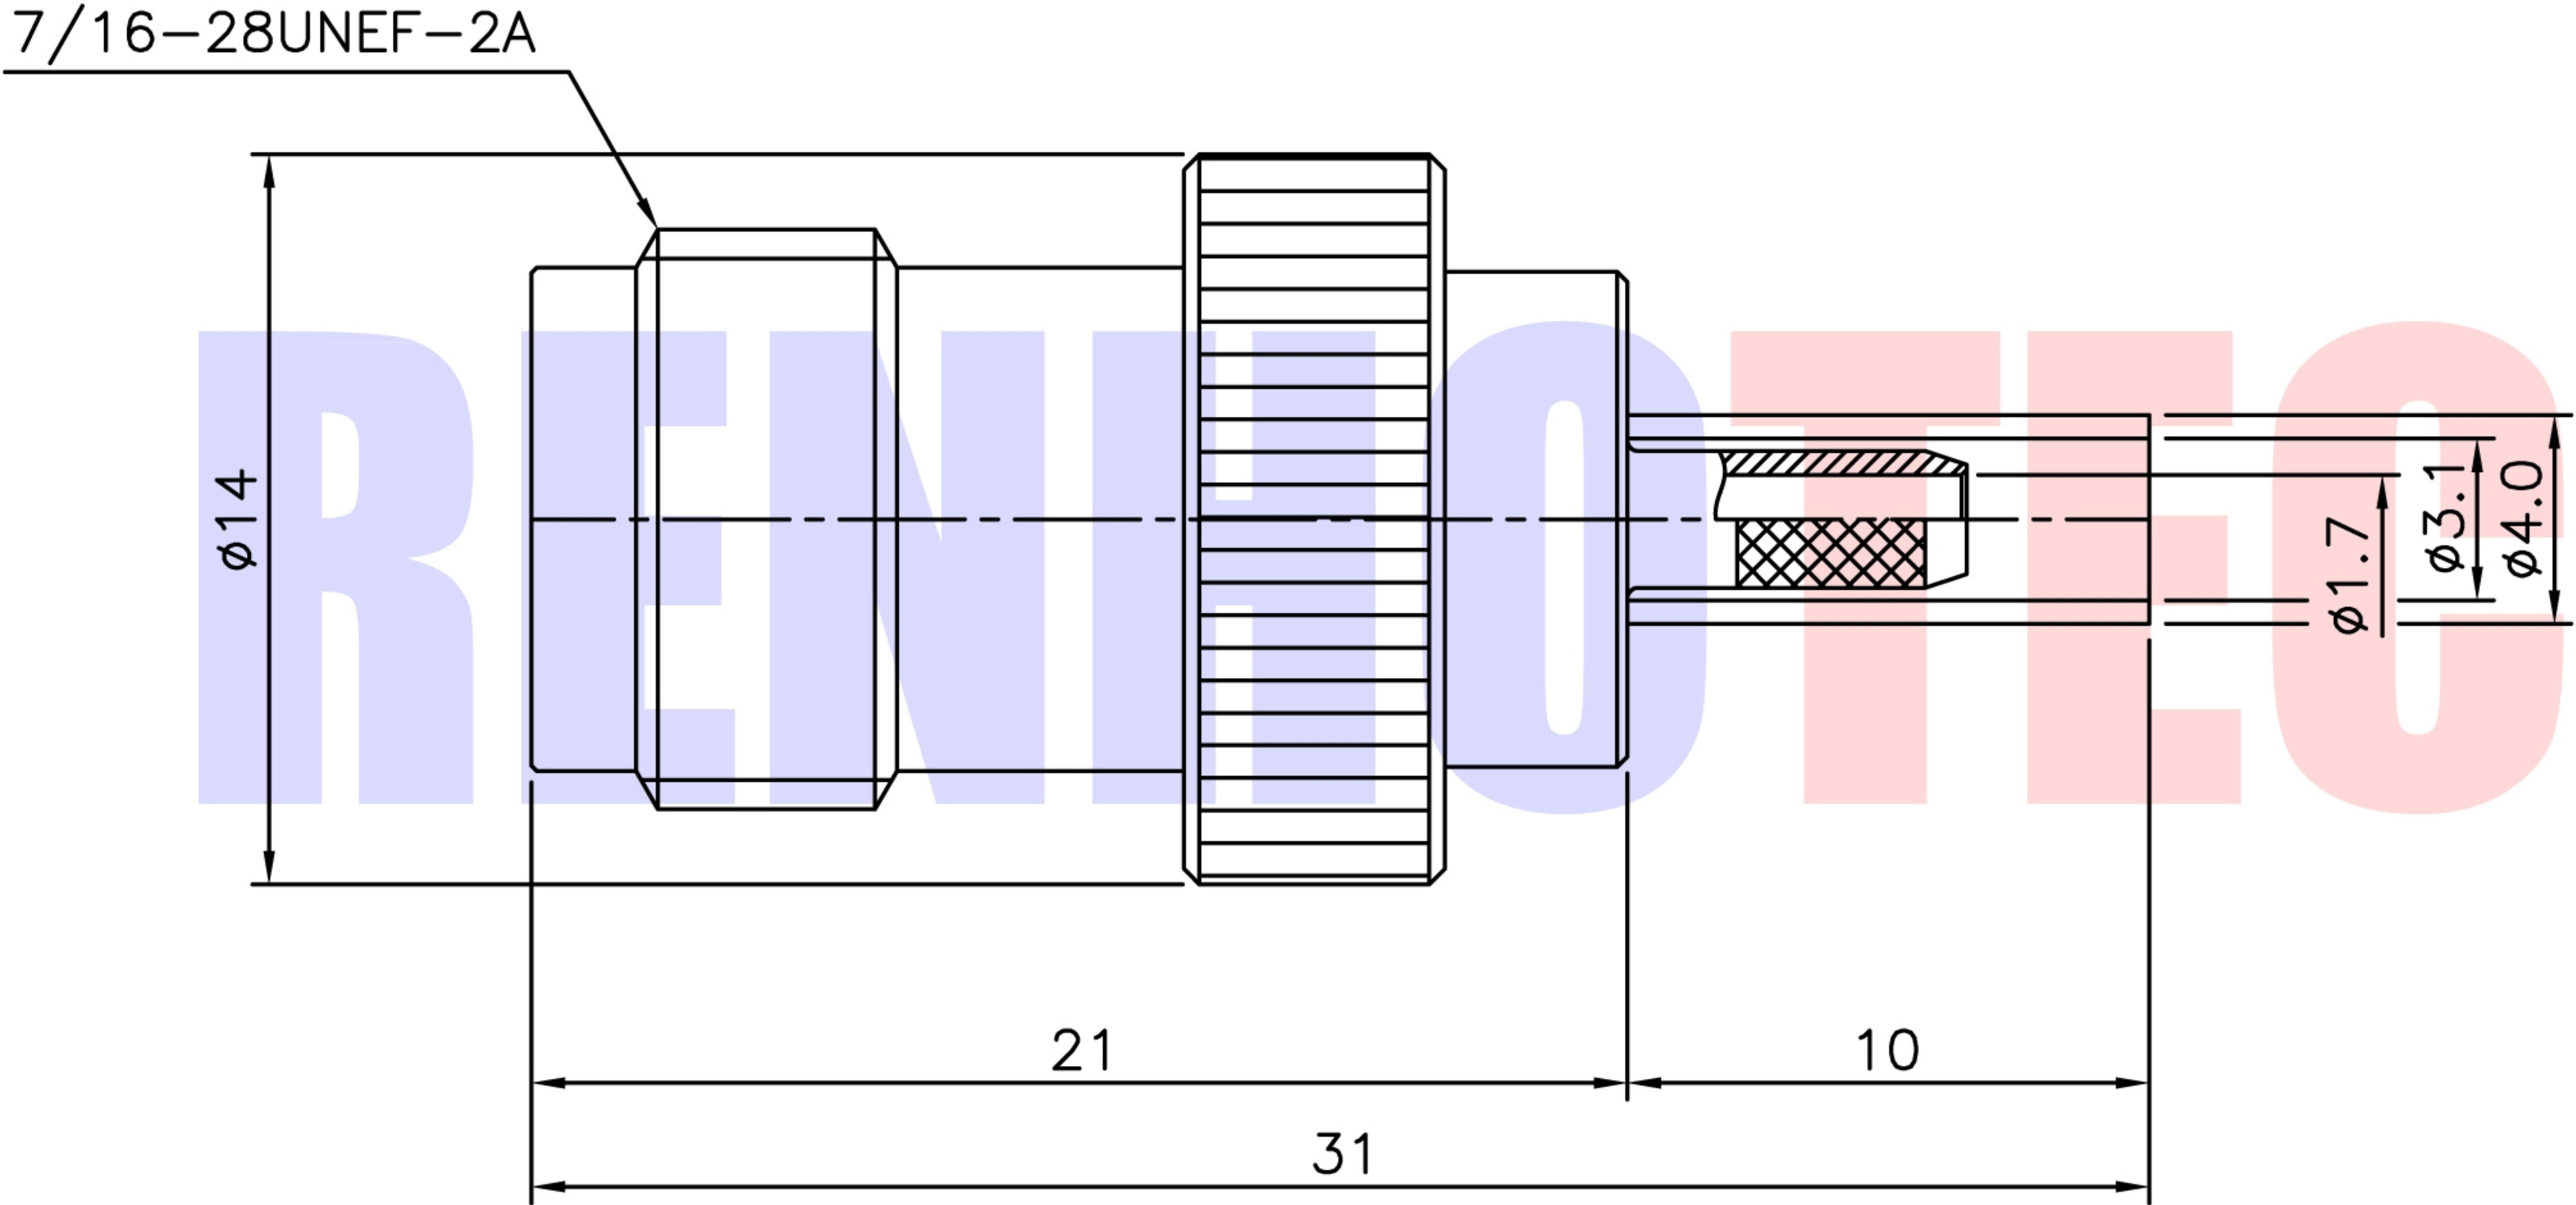

Connector parts	Materials	Finish
Body	Brass	Nickel Plated
Center contact	Be-Cu	Gold Plated
Ferrule	Brass	Nickel Plated
Insulator	PTFE	-

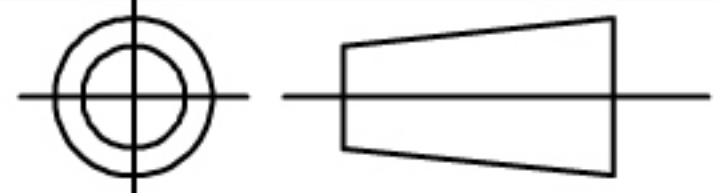NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	 RENHOTEC GROUP	
DRAWN					
Zelin. Zhang	2017/3/7	View		Name: TNC Straight Jack for Cable RG316	
CHECKED		UNIT	MM	SIZE A	Product NO. RHT-615-0211
APPROVALS		SCALE	1:1	DateTime	CAD FILE
John Kine	2017/3/7			2017/3/7	D/company drawings/BD
				SHEET: 1 OF 1	