





SPECIFICATIONS

- 1. Impedance : 50Ω
- 2. Frequency range : DC~4.0GHz
- 3. Contact current : DC 3.5A max.
- 4. Voltage rating : 250Vrms
- 5. Contact resistance : Center contacts : 2.0mΩ
Outer contacts : 0.2mΩ
- 6. Insulation resistance : 5,000MΩmin.
- 7. Temperature Range : -65°C ~ +165°C
- 8. V.S.W.R : ≤1.25

Product NO.	Renhotec-615-0215			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/7	John kine

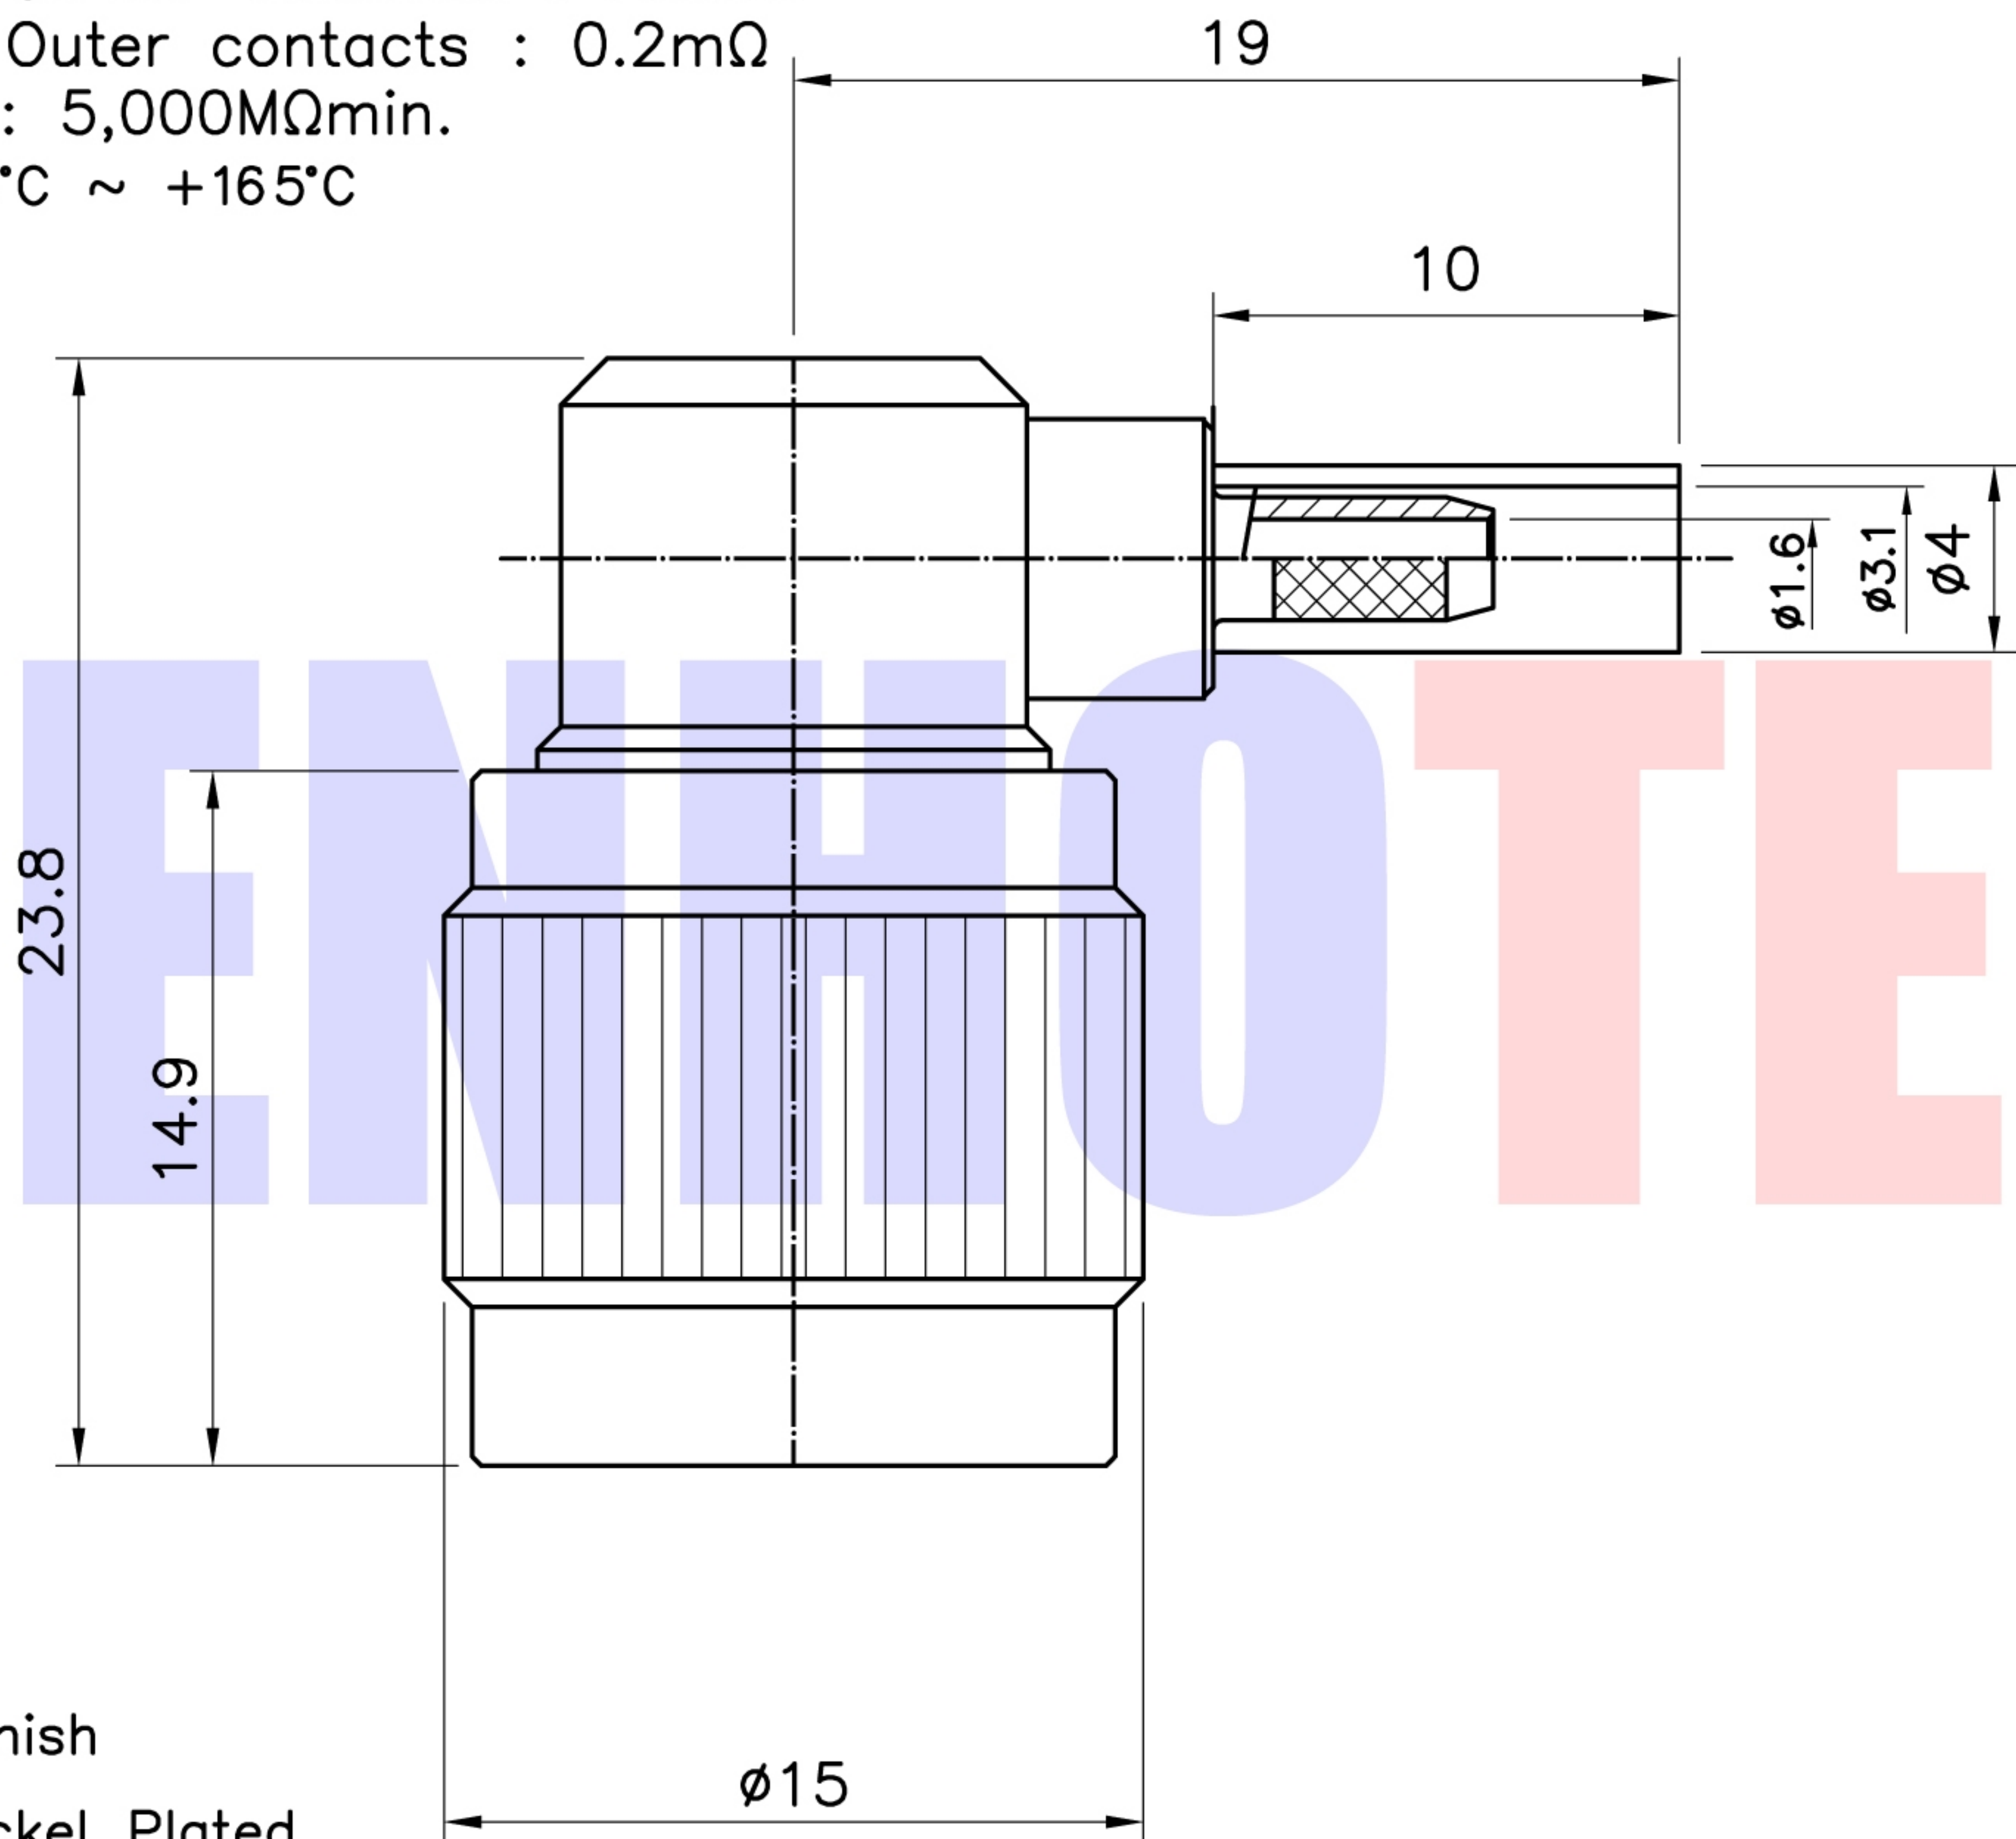

Connector parts	Materials	Finish
Coupling Cap	Brass	Nickel Plated
Body	Brass	Nickel Plated
Center contact	Brass	Gold Plated
Insulator	PTFE	-
Ferrule	Brass	Nickel Plated

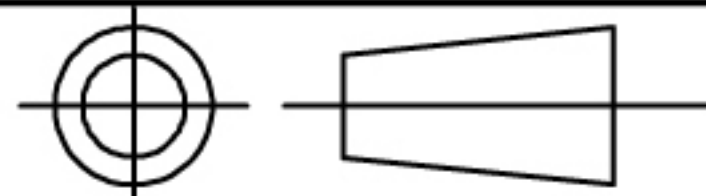NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	 RENHOTEC GROUP	
DRAWN					
Zelin. Zhang	2017/3/7	View		Name: TNC R/A Plug for Cable RG316	
CHECKED		UNIT	MM	SIZE A	Product NO. RHT-615-0215
APPROVALS		SCALE	1:1	DateTime	CAD FILE
John Kine	2017/3/7			2017/3/7	D/company drawings/BD
				SHEET: 1 OF 1	