




SPECIFICATIONS


Impedance ; 50ohm
Frequency ; DC~6GHz
Working Voltage; 335 VRMS
VSWR ; max 1.25:1 UP TO 2.5GHz
Temperature range : -55°C to +165°C

Product NO.	Renhotec-615-0220			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/7	John kine

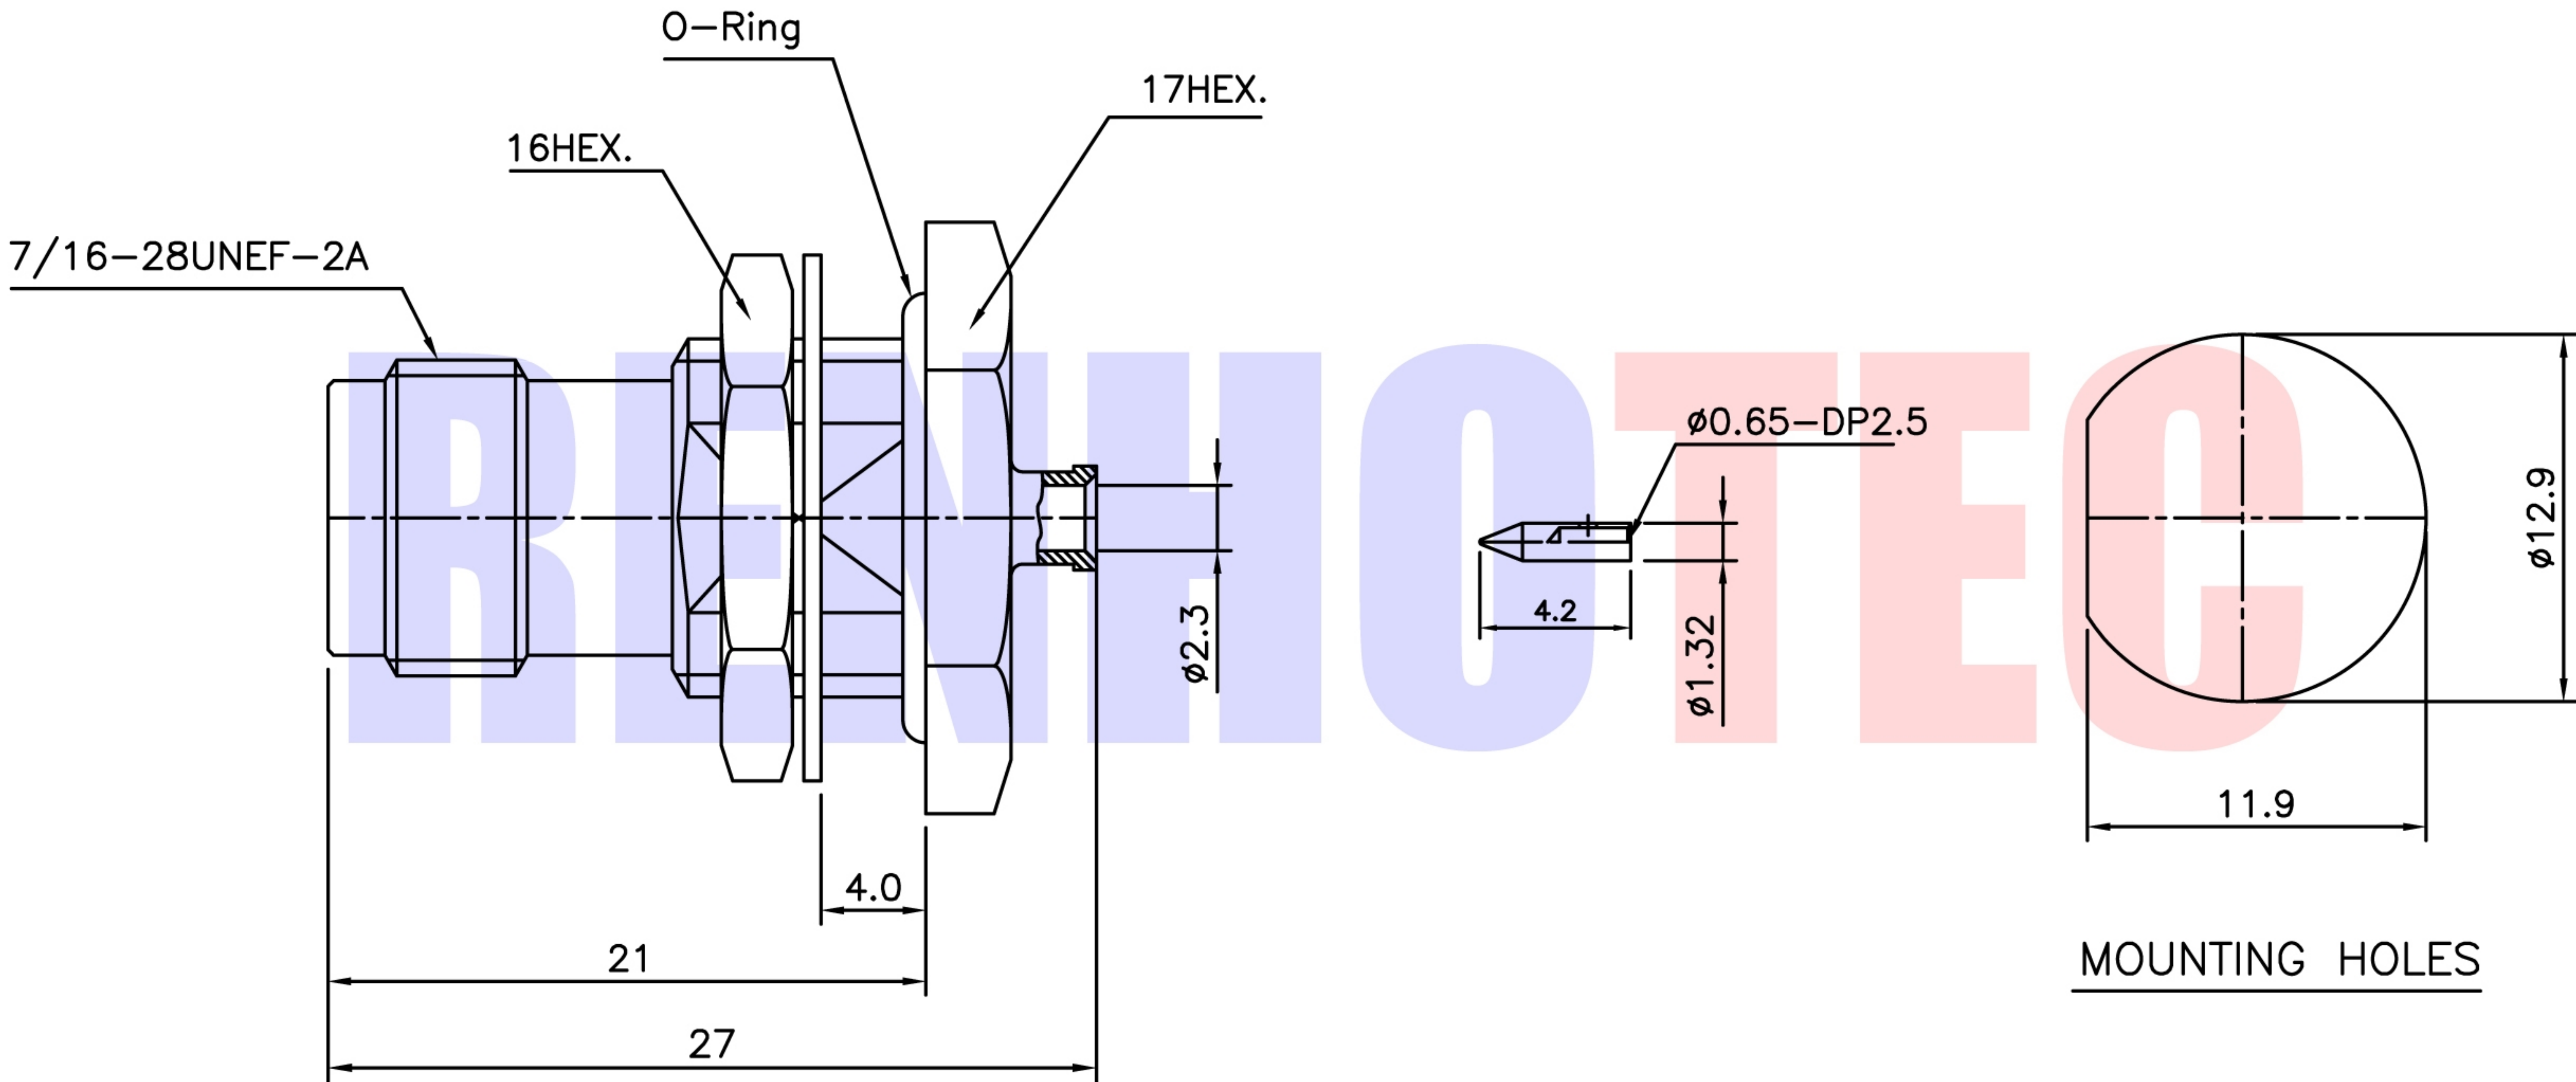

Item	Materials	Plating
Body	Brass	Nickel Plated
Center contact	Be-Cu	Gold Plated
Nut,Washer	Brass	Nickel Plated
Insulator	PTFE	—
O-Ring	Silicone rubber	—

TNC-Bulkhead Rear Mount JACK
w/h Panel seal
for Cable-UT085

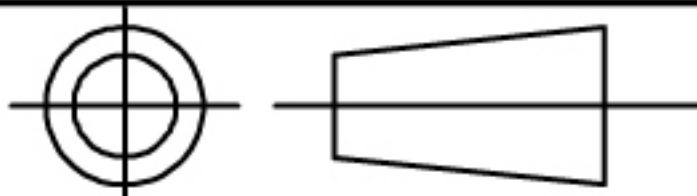NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	 RENHOTEC GROUP				
DRAWN	2017/3/7			View		Name: Waterproof TNC Jack for Cable UT085		
Zelin. Zhang								
CHECKED		UNIT	MM	SIZE A	Product NO. RHT-615-0220	REV B		
APPROVALS	2017/3/7	SCALE	1:1	DateTime	CAD FILE	SHEET: 1 OF 1		
<i>John Kine</i>				2017/3/7	D/company drawings/BD			