



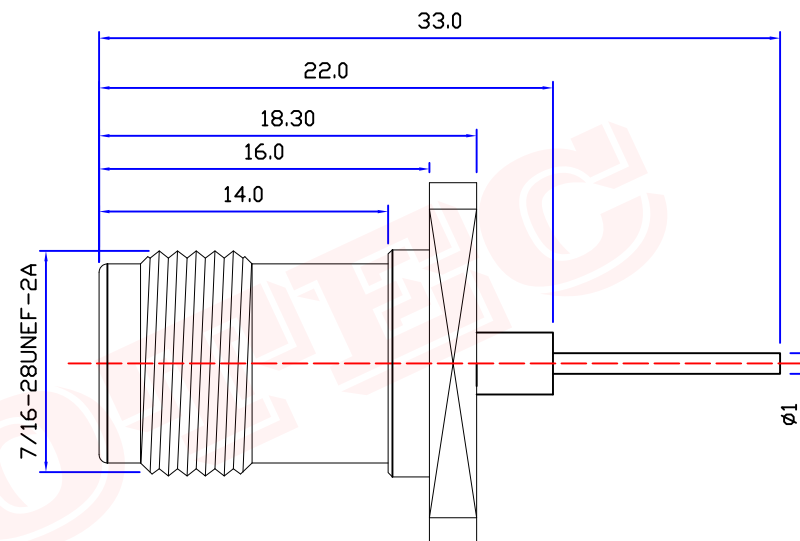

Product NO.		RHT-615-0230			
REV	DESCRIPTION	DWN	DATE	APPROVEN	
A	First issue	Gavin	2017/12/08	JIM. KING	

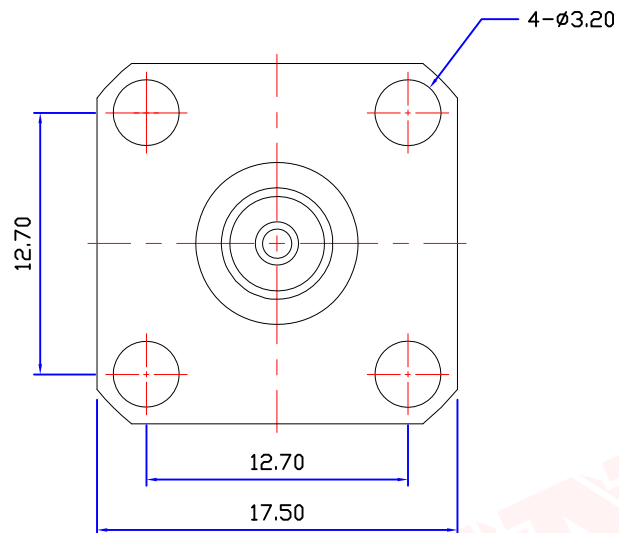

Specifications:

IMPEDANCE: 50 Ohms

Frequency range:0~3GHZ

VSWR:1.3MAX

Working voltage:500V rms @ sea level

Insulation resistance:5000 Ohms min

Temperature range:-55℃ TO +155℃

Relative temperature:≤95%(40° C±2° C)

3	PIN	BRASS	GOLD	1
2	DIELECTRIC	TEFLON	NONE	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED		RENHOTEC www.renhotec.com		RENHOTEC GROUP			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 -120mm ± 0.50mm		Appd: JIM. KING		PART DESCRIPTION: TNC JACK CONNECTORS			
Check:		Date		Scale	Unit	Type	Page
Draw: Gavin		2017/12/08		Free	MM	Z	1/1