




SPECIFICATIONS

- 1. IMPEDANCE: 50 Ohm
- 2. FREQUENCY RANGE: 0~4GHz
- 3. VOLTAGE RATING: 335Vrms;
- 4. INSERTION LOSS: 0.6dB Max
- 5. INSULATION RESISITANCE: 1000M Ohm.

Product NO.	Renhotec-626-0208			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/6	John kine

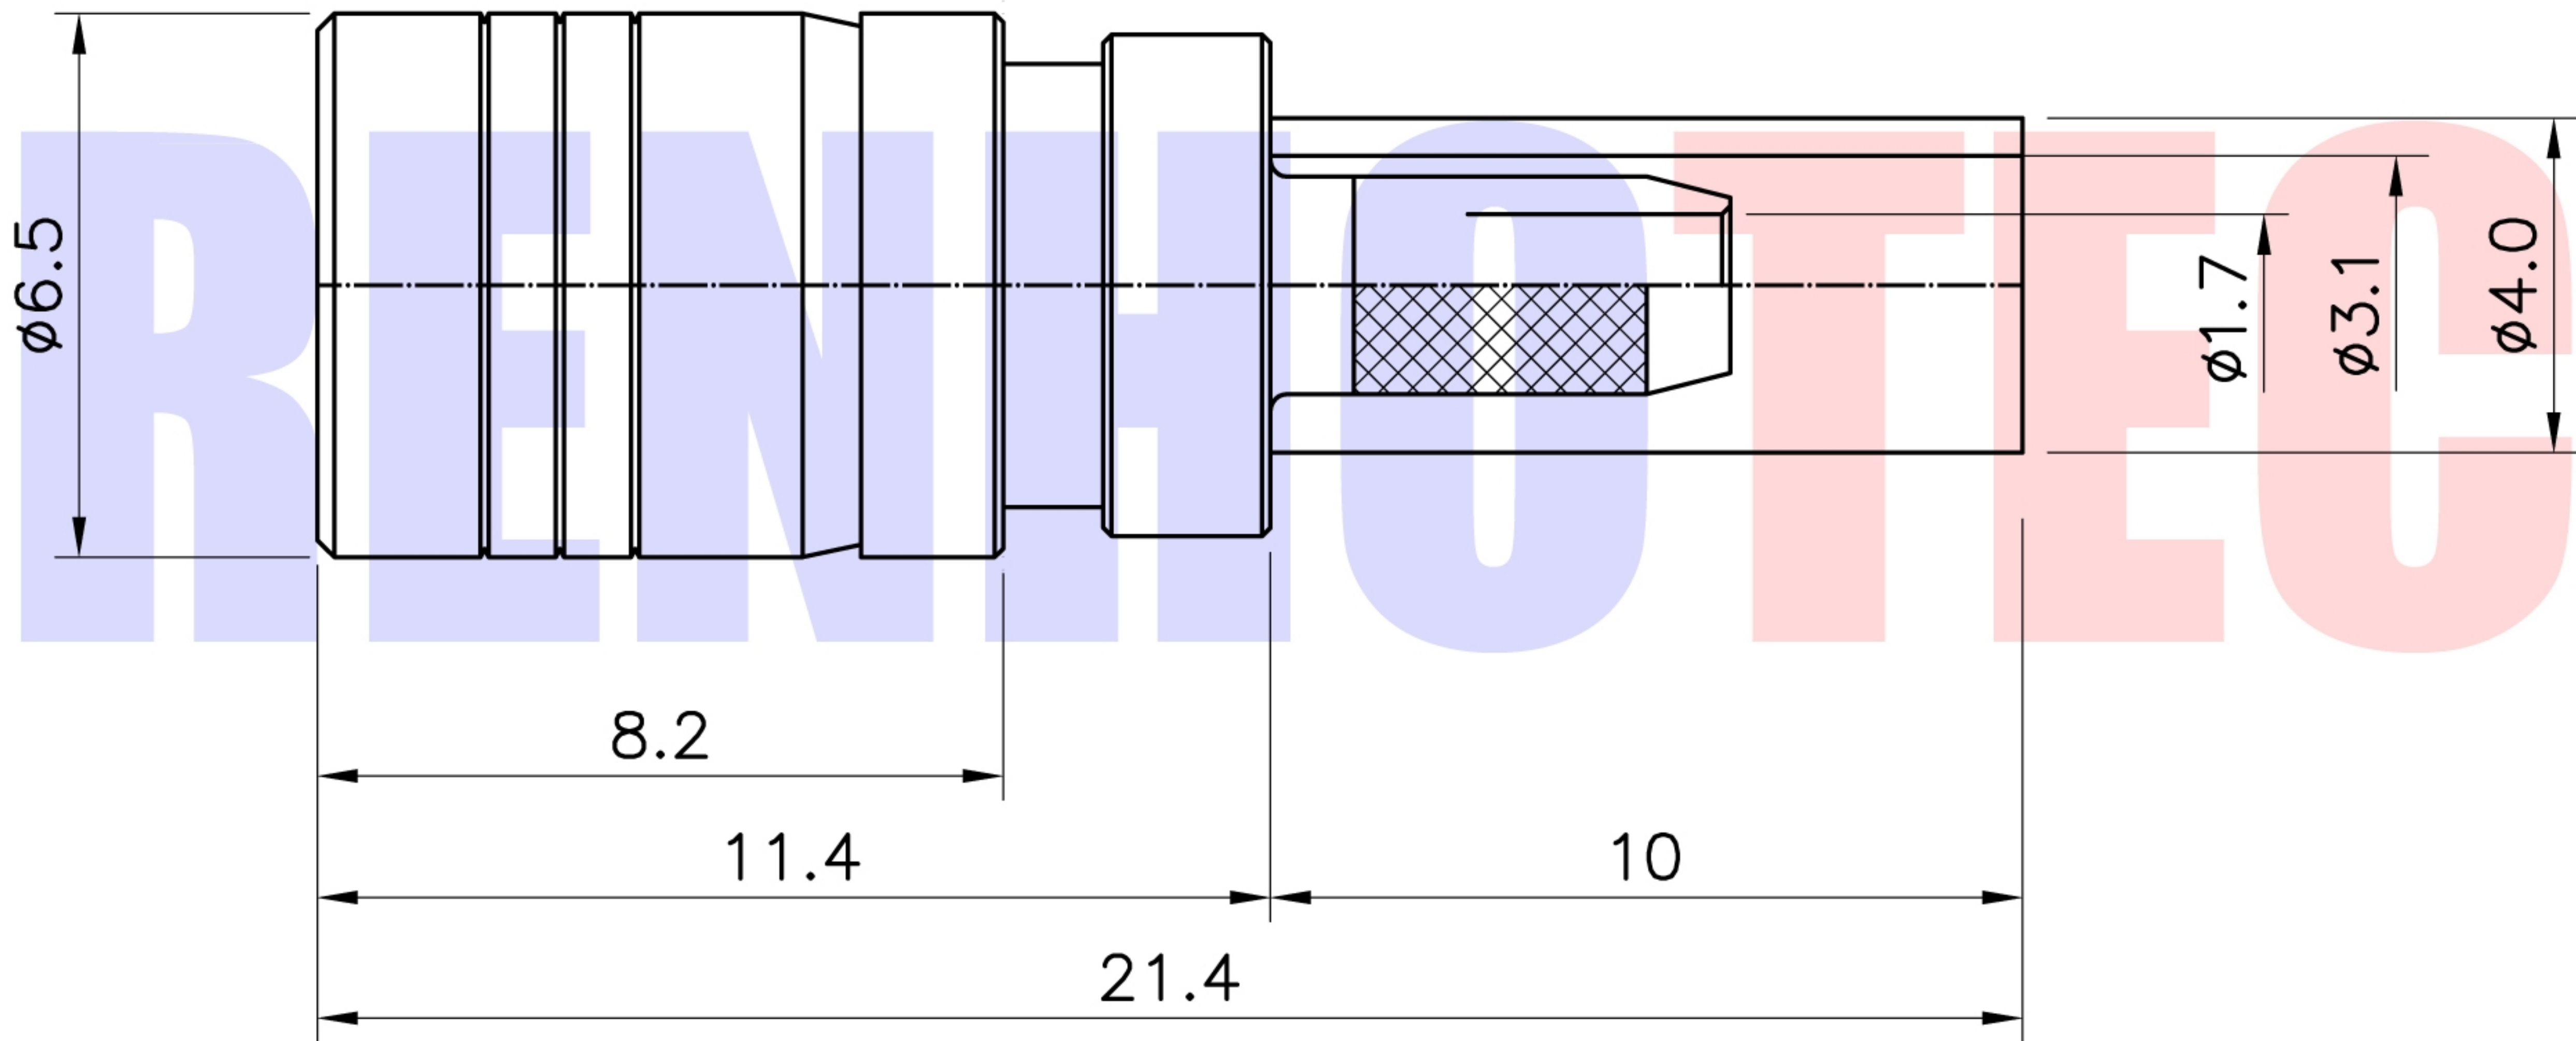

Connector parts	Materials	Finish
Body	Brass	Gold Plated
Center contact	Be-Cu	Gold Plated
Outer contact	Brass/Be-Cu	Gold Plated
Ferrule	Brass	Gold Plated
Insulator	TEFLON	-

NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	RENHOTE www.renhotec.com RENHOTE GROUP		
DRAWN						
Zelin. Zhang	2017/3/6	View		Name: SMB Straight Jack Plug for Cable RG316,174		
CHECKED		UNIT	MM	SIZE A	Product NO. RHT-626-0208	REV B
APPROVALS		SCALE	1:1	DateTime	CAD FILE	SHEET: 1 OF 1
John Kine	2017/3/6			2017/3/6	D/company drawings/BD	