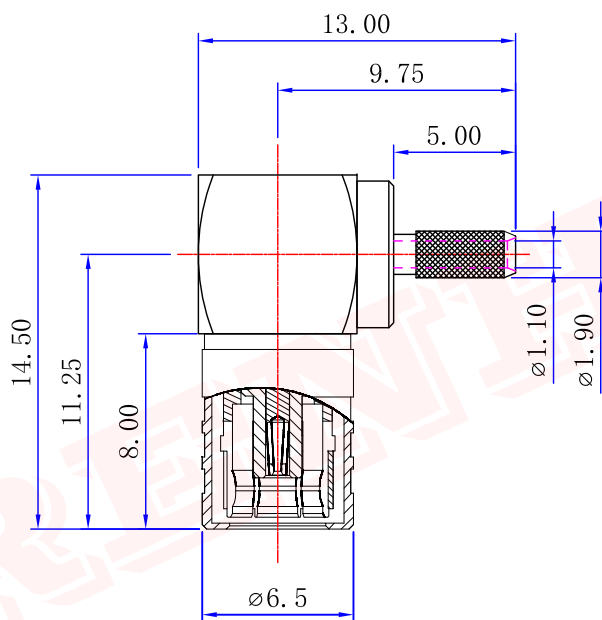

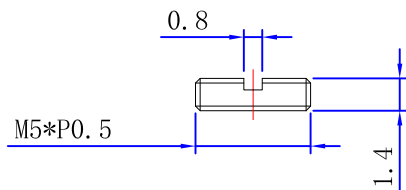


Specifications:

IMPEDANCE: 50 Ohms

Frequency range:0~6GHZ

VSWR:1.5MAX

Working voltage:500V rms @ sea level

Insulation resistance:1000 Ohms min

Temperature range:-40℃ TO +125℃

Relative temperature:≤95%(40° C±2° C)

6	COPPER PIPE	BRASS	GOLD	1
5	CAP	BRASS	GOLD	1
4	SPACER	BRASS	GOLD	1
3	PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NONE	1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

Product NO.

RHT-626-0216


REV	DESCRIPTION	DWN	DATE	APPROVEN
R1.0	First issue	Gavin	2019/11/28	JIM. KING

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.25mm
30 - 120mm ± 0.30mm



RENHOTEC GROUP



Appd: JIM. KING

Check:

Draw: Gavin

PART DESCRIPTION:

SMB PLUG R/A FOR RG178 CABLE

P/N: RHT-626-0216

Date	Scale	Unit	Type	Page
2019. 11. 28	Free	MM	Z	1/1