

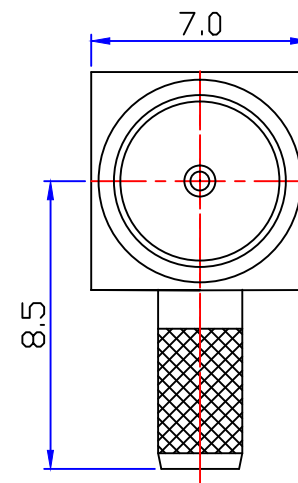


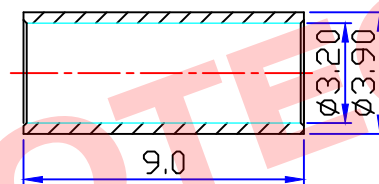

Product NO.	RHT-626-0218			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr;CHEN	2017/3/6	JIM KING

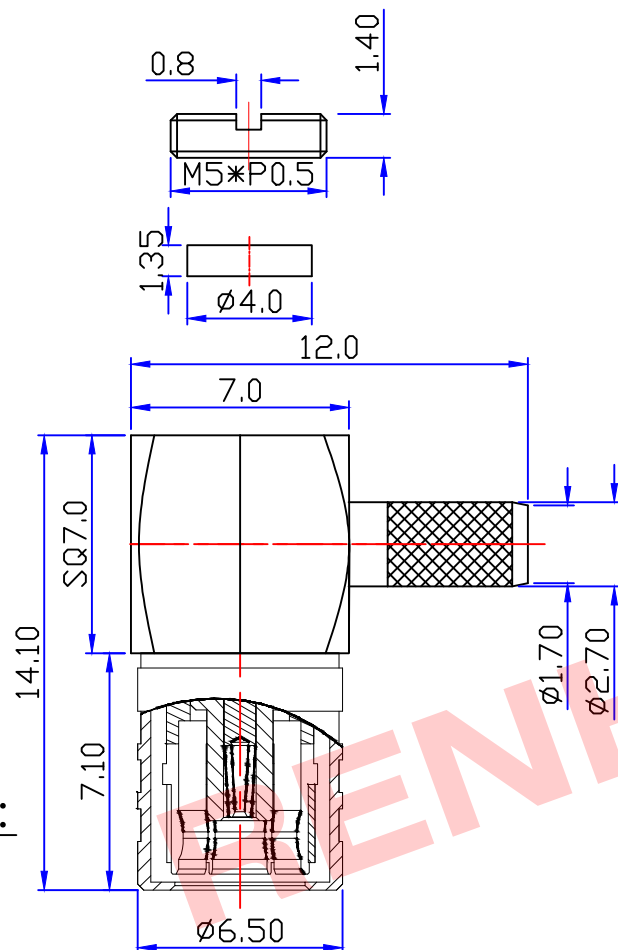

Specifications:

IMPEDANCE: 50 Ohms

Frequency range: 0~6GHz

VSWR: 1.5MAX

Working voltage: 500V rms @ sea level

Insulation resistance: 5000 Ohms min

Temperature range: -65°C TO +165°C

Relative temperature: ≤95% (40°C ±2°C)

1	FERRULE	BRASS	GOLD PLATED
1	COVER	BRASS	GOLD PLATED
1	CONTACT	BERYLLIUM COPPER	GOLD PLATED
1	BODY	BRASS	GOLD PLATED
1	BODY	BRASS	GOLD PLATED
1	SLEEVE	BRASS	GOLD PLATED
1	INSULATOR	TEFLON	NONE
1	RETAINING RING	☆ SUS-304	NONE
QTY	DESCRIPTION	MATERIAL	FINISH

NOTE:

DRAWN
Zelin.CHEN


CHECKED

APPROVALS
John
Kine

Tolerance

0-6 ±0.10
6-30 ±0.20
30-120 ±0.30
Angular ±2°

View



UNIT

MM

SCALE

1:1



RENHOTEC GROUP

Name: SMB PLUG FOR RG316 & RG174 CABLE

SIZE
A

Product NO. RHT-626-0218

REV
B

DateTime
2017/3/6

CAD FILE
D/company drawings/BD

SHEET: 1 OF 1