

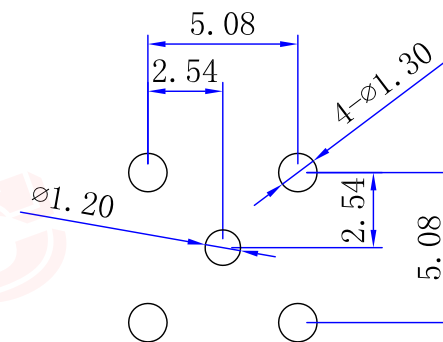


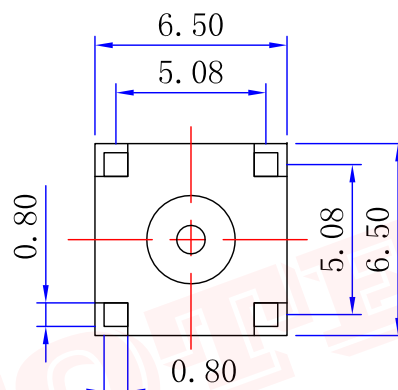

Product NO.

RHT-626-0219

REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Gavin	2018/10/09	JIM. KING
A	R/A SMB JACK	Gavin	2018/11/29	JIM. KING

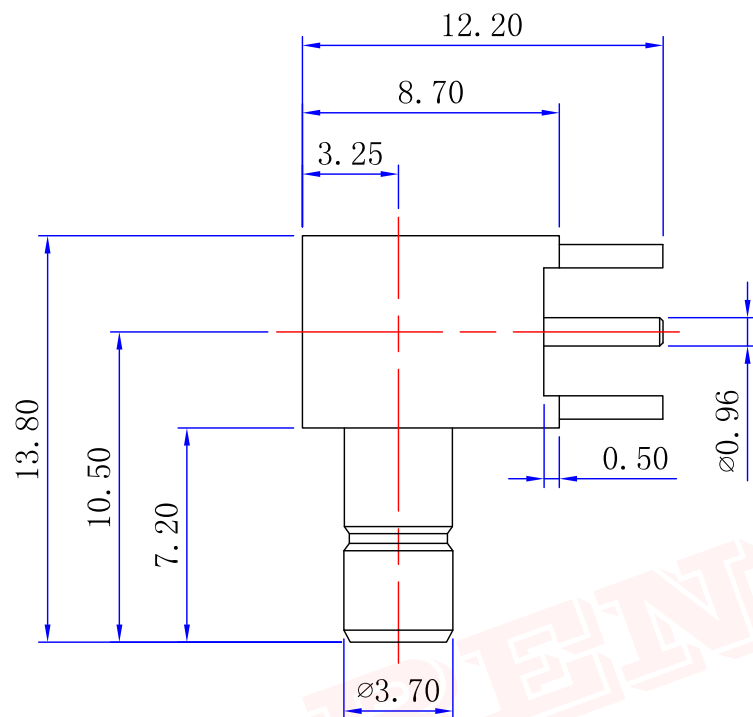

PCB

Specifications:

IMPEDANCE: 50 Ohms

Frequency range: 0~4GHz

VSWR: 1.5MAX

Working voltage: 500V rms @ sea level

Insulation resistance: 1000 Ohms min


Temperature range: -65°C TO +165°C

Relative temperature: ≤95% (40°C ±2°C)

6				
5				
4				
3	PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NONE	1
1	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.10mm
8 - 30mm ± 0.15mm
30 - 120mm ± 0.20mm

**RENHOTEC GROUP**

Appd: JIM. KING

Check:

Draw: Gavin

PART DESCRIPTION:

R/A SMB JACK PCB

P/N: RHT-626-0219

Date	Scale	Unit	Type	Page
2018. 11. 29	Free	MM	Z	1/1