





SPECIFICATIONS

- 1. IMPEDANCE: 50 Ohm;
- 2. FREQUENCY RANGE: 0~4GHz;
- 3. VOLTAGE RATING: 335Vrms;
- 4. INSERTION LOSS: 0.6dB Max;
- 5. INSULATION RESISTANCE: 1000M Ohm.

Product NO.	Renhotec-626-0229			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/6	John kine

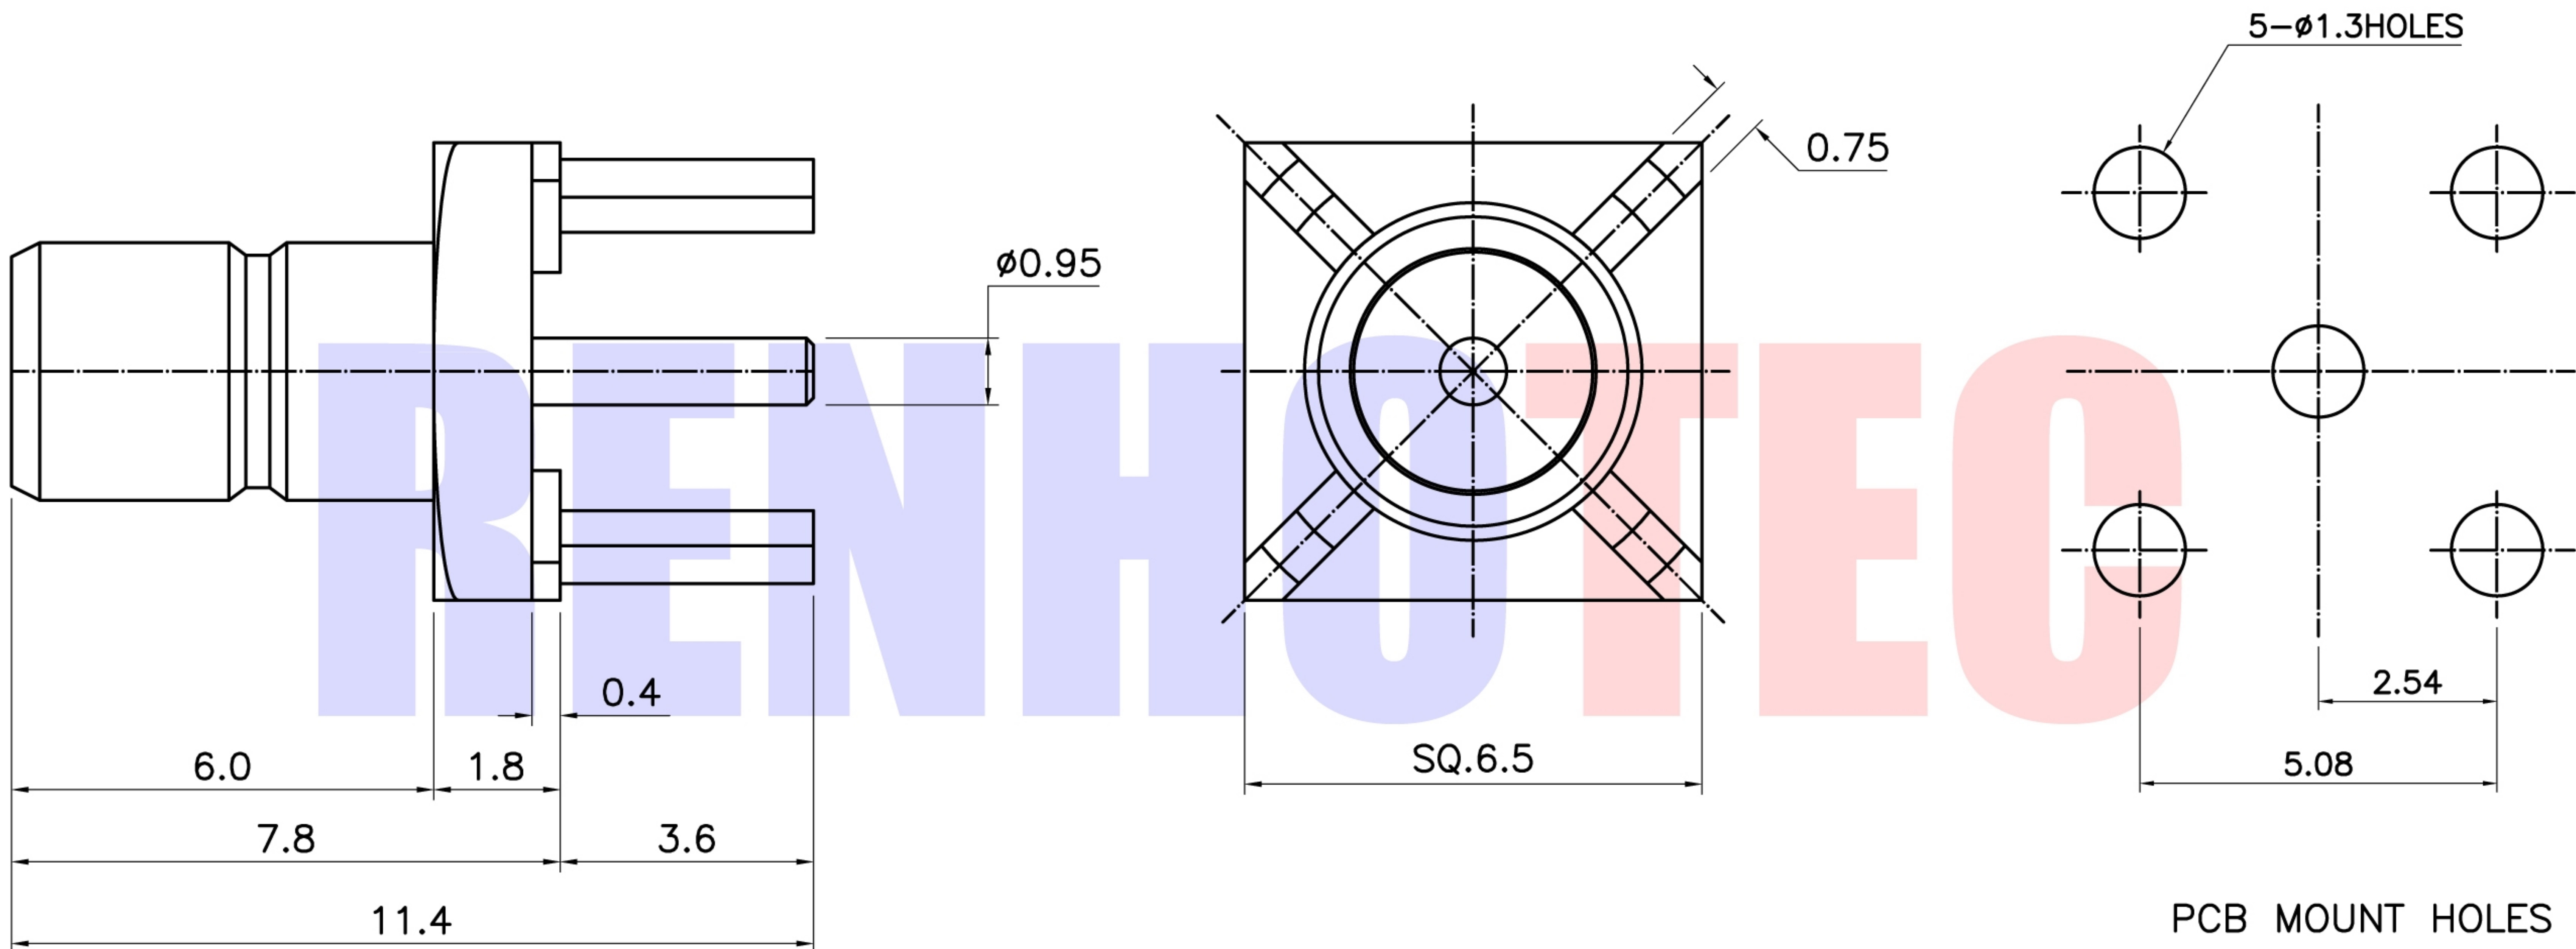

Item	Materials	Plating
Body	Brass	Gold Plated
Center contact	Brass	Gold Plated
Insulator	PTFE	—

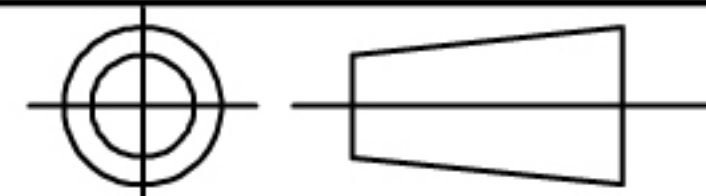NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°	 RENHOTEC GROUP				
DRAWN	Zelin. Zhang2017/3/6			View		Name: SMB Straight PCB Jack		
CHECKED						UNIT	MM	SIZE A
APPROVALS <i>John Kine</i> 2017/3/6		SCALE	1:1	DateTime 2017/3/6	CAD FILE D/company drawings/BD	SHEET: 1 OF 1		