
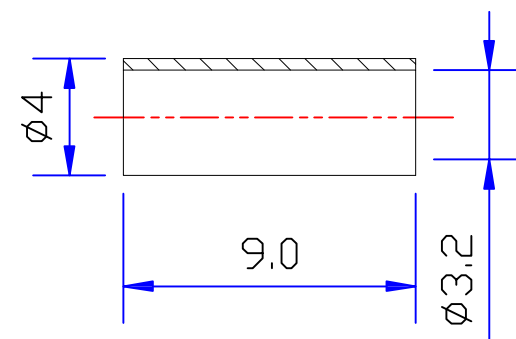



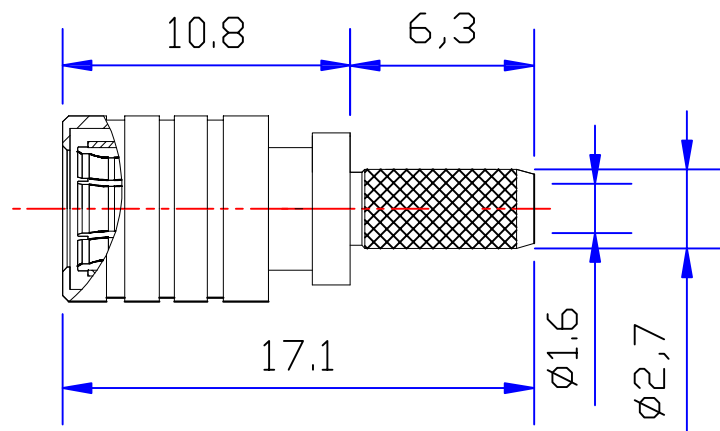

Product NO.

RHT-626-0245

| REV  | DESCRIPTION                    | DWN   | DATE       | APPROVEN  |
|------|--------------------------------|-------|------------|-----------|
| R1.0 | First issue                    | Gavin | 2019/08/27 | JIM. KING |
| R2.0 | Increase electrical parameters | Gavin | 2020/12/16 | JIM. KING |

Specifications:

IMPEDANCE: 50 Ohms

Frequency range: 0~6GHz

VSWR: 1.5MAX

Max Voltage For RG174: 1100V

Working voltage: 500V rms @ sea level

Insulation resistance: 1000 Ohms min


Temperature range: -40°C TO +125°C

Relative temperature: ≤95% (40°C ± 2°C)

|    |             |          |        |     |
|----|-------------|----------|--------|-----|
| 4  | COPPER PIPE | BRASS    | GOLD   | 1   |
| 3  | PIN         | BRASS    | GOLD   | 1   |
| 2  | INSULATOR   | PTFE     | NONE   | 1   |
| 1  | BODY        | BRASS    | GOLD   | 1   |
| NO | DESCRIPTION | MATERIAL | FINISH | QTY |

-TOLERANCES-  
UNLESS OTHERWISE  
SPECIFIED

UNLESS OTHERWISE SPECIFIED  
TOLERANCES FOR MILLIMETERS ARE:  
0.5 - 8mm ± 0.20mm  
8 - 30mm ± 0.25mm  
30 - 120mm ± 0.30mm

**RENHOTEC GROUP**

Appd: JIM. KING

Check:

Draw: Gavin

PART DESCRIPTION:

SMB PLUG FOR RG174/316 CABLE

P/N:

RHT-626-0245

Date

2020. 12. 16

Scale

Free

Unit

MM

Type

Z

Page

1/1