




Product NO. RHT-626-0246

REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Gavin	2019/05/13	JIM. KING

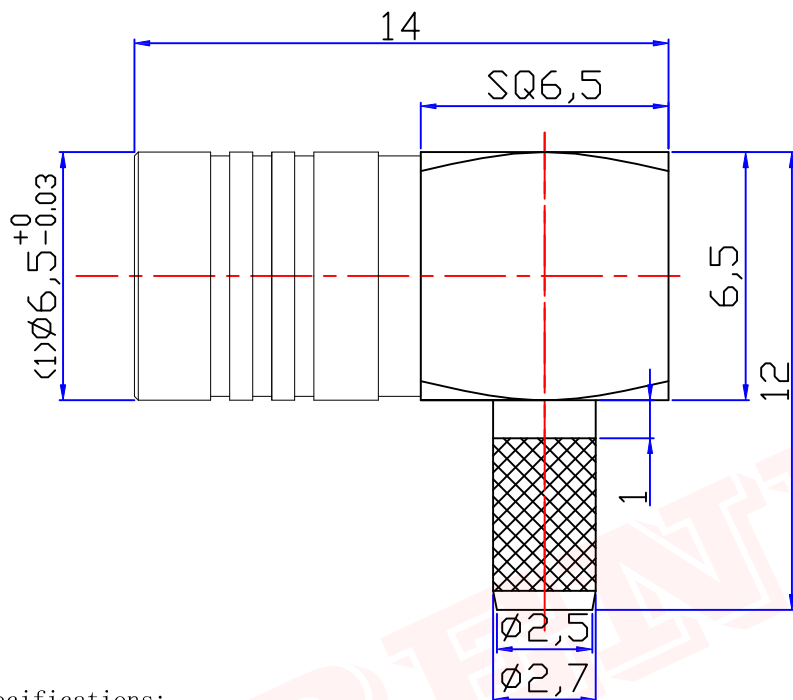

Specifications:

IMPEDANCE:50 Ohms

Frequency range:0~4GHZ

VSWR:1.5MAX

Max Voltage For RG174:1100V

Working voltage:500V rms @ sea level

Insulation resistance:1000 Ohms min

Temperature range:-40°C TO +125°C

Relative temperature:≤95%(40° C±2° C)

NO	DESCRIPTION	MATERIAL	FINISH
3	Pin	BRASS	GOLD
2	INSULATING	PTFE	White
1	BODY	BRASS	GOLD

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	RENHOTEC RENHOTEC GROUP www.renhotec.com					
	PART DESCRIPTION: R/A SMB PLUG FOR RG316/174 CABLE					
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.15mm 8 - 30mm ± 0.20mm 30 - 120mm ± 0.30mm	Appd: JIM. KING	P/N: RHT-626-0246				
	Check:	Date	Scale	Unit	Type	Page
	Draw: Gavin	2019. 05. 13	Free	MM	Z	1/1