

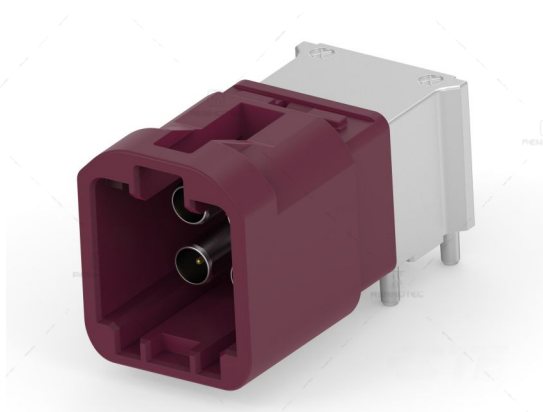




Cable-to-Board Shielded Horizontal 4 Position Board Mount D Code 4 mm (.157 in) Centerline Signal Data Connectivity Headers

Part Number:

TE-2450874-4



Basic Information

Number of Positions	4
Series	MATE-AX
Tcpn	2450874-4
Product Description	4P,MATE-AX,HDR,ASSY,90EDG,CODD
Connector System	Cable-to-Board
Number of Rows	2
PCB Mount Orientation	Horizontal
Keying Code	D
Connector Mounting Type	Board Mount

Mechanical Specification

Mating Pin Diameter	.4 mm (.016 in)
Centerline (Pitch)	4 mm (.157 in)

Material Specification

Contact Mating Plating	Gold (Au)
Housing Color	Claret Violet
UL Flammability Rating	UL 94HB

Electrical Specification

Connector & Contact Terminates To	Printed Circuit Board
Termination Method to PCB	Through Hole - Solder
Circuit Application	Signal

Environmental Specification

Sealable	No
Shielded	Yes
Packaging Quantity	920.0
Operating Temperature (Max)	105 °C (221 °F)
Operating Temperature Range	-40 – 105 °C (-40 – 221 °F)
Packaging Method	Carton

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.