

F Type Connector Right Angle Female Panel Mount Through Hole - RHT-611-0003



Drawing

1	2		3		4		5		6																																																																																																																																																	
A	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2">Product NO.</td> <td colspan="4">Renhotec-611-0003</td> </tr> <tr> <td>REV</td> <td>DESCRIPTION</td> <td>DWN</td> <td>DATE</td> <td colspan="2">APPROVEN</td> </tr> <tr> <td>A</td> <td>First issue</td> <td>Mr. CHEN</td> <td>2016/3/12</td> <td colspan="2">John kine</td> </tr> </table>										Product NO.		Renhotec-611-0003				REV	DESCRIPTION	DWN	DATE	APPROVEN		A	First issue	Mr. CHEN	2016/3/12	John kine																																																																																																																															
Product NO.		Renhotec-611-0003																																																																																																																																																								
REV	DESCRIPTION	DWN	DATE	APPROVEN																																																																																																																																																						
A	First issue	Mr. CHEN	2016/3/12	John kine																																																																																																																																																						
B																																																																																																																																																										
C																																																																																																																																																										
D	<p>SPECIFICATIONS: Impedance: 75 Ohms Frequency Range: DC~3G VSWR: 30dB Return loss @ 1GHZ Working Voltage: 15 watts continuous Insulation Resistance: 5000 Ohms min Temperature Range: -40°C TO +60°C Drawings products are in line with ROHS standards</p>																																																																																																																																																									
E	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2">1 Body</td> <td colspan="2">NINC</td> <td colspan="2">NI:80-120u"</td> <td colspan="2">NOTE:</td> <td colspan="2">Tolerance</td> <td colspan="2"> </td> </tr> <tr> <td colspan="2">2 Insulator</td> <td colspan="2">PP</td> <td colspan="2">White</td> <td colspan="2">DRAWN</td> <td colspan="2">0-6 ±0.10</td> <td colspan="2">RENHOTECH GROUP</td> </tr> <tr> <td colspan="2">3 Center contact</td> <td colspan="2">Phosphor</td> <td colspan="2">SN</td> <td colspan="2">2016/03/12</td> <td colspan="2">6-30 ±0.20</td> <td colspan="2">www.renhotec.com</td> </tr> <tr> <td colspan="2">4</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">Zelin. Zhang</td> <td colspan="2">30-120 ±0.30</td> <td colspan="2">Name: F Jack Right angle PCB Mount</td> </tr> <tr> <td colspan="2">5</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">CHECKED</td> <td colspan="2">Angular ±2°</td> <td colspan="2">SIZE A</td> </tr> <tr> <td colspan="2">6</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">Product NO. RENHOTECH-611-0003</td> </tr> <tr> <td colspan="2">7</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">DateTime</td> </tr> <tr> <td colspan="2">8</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">2016/3/12</td> </tr> <tr> <td colspan="2">9</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">CAD FILE</td> </tr> <tr> <td colspan="2">10 Component Number</td> <td colspan="2">Material</td> <td colspan="2">Finish</td> <td colspan="2">APPROVALS</td> <td colspan="2">SCALE</td> <td colspan="2">D/company drawings/BD</td> </tr> <tr> <td colspan="2">1</td> <td colspan="2">2</td> <td colspan="2">3</td> <td colspan="2">John Kine</td> <td colspan="2">1:1</td> <td colspan="2">SHEET: 1 OF 1</td> </tr> <tr> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">12/03/2016</td> <td colspan="2"></td> <td colspan="2"></td> </tr> </table>										1 Body		NINC		NI:80-120u"		NOTE:		Tolerance				2 Insulator		PP		White		DRAWN		0-6 ±0.10		RENHOTECH GROUP		3 Center contact		Phosphor		SN		2016/03/12		6-30 ±0.20		www.renhotec.com		4						Zelin. Zhang		30-120 ±0.30		Name: F Jack Right angle PCB Mount		5						CHECKED		Angular ±2°		SIZE A		6										Product NO. RENHOTECH-611-0003		7										DateTime		8										2016/3/12		9										CAD FILE		10 Component Number		Material		Finish		APPROVALS		SCALE		D/company drawings/BD		1		2		3		John Kine		1:1		SHEET: 1 OF 1								12/03/2016					
1 Body		NINC		NI:80-120u"		NOTE:		Tolerance																																																																																																																																																		
2 Insulator		PP		White		DRAWN		0-6 ±0.10		RENHOTECH GROUP																																																																																																																																																
3 Center contact		Phosphor		SN		2016/03/12		6-30 ±0.20		www.renhotec.com																																																																																																																																																
4						Zelin. Zhang		30-120 ±0.30		Name: F Jack Right angle PCB Mount																																																																																																																																																
5						CHECKED		Angular ±2°		SIZE A																																																																																																																																																
6										Product NO. RENHOTECH-611-0003																																																																																																																																																
7										DateTime																																																																																																																																																
8										2016/3/12																																																																																																																																																
9										CAD FILE																																																																																																																																																
10 Component Number		Material		Finish		APPROVALS		SCALE		D/company drawings/BD																																																																																																																																																
1		2		3		John Kine		1:1		SHEET: 1 OF 1																																																																																																																																																
						12/03/2016																																																																																																																																																				

Basic Information

Connector Type	Jack
Fastening Type	3/8-32 Threaded
Mounting Feature	Through Hole
Mounting Type	Panel Mount
Orientation	Right Angle
RF Series	F Type

Mechanical Specification

Contact Retention	20 in-lbs min.
Contact Termination Style	Solder
Mating Durability	≥ 500 Cycles

Environmental Specification

Temperature Range	-40°C to +140°C
--------------------------	-----------------

Material and Finish


Component Description	Material	Finish
Shell	Copper Alloy	Nickel Plated
Insulator	Polypropylene	
Center Contact	Brass	Tin Plated

Impedance Testing

Impedance	75 ohm
-----------	--------

Frequency & VSWR Test Report

Frequency Range	DC-1GHz
VSWR	R/A type ≤ 1.3MAX, Straight type ≤ 1.2 MAX

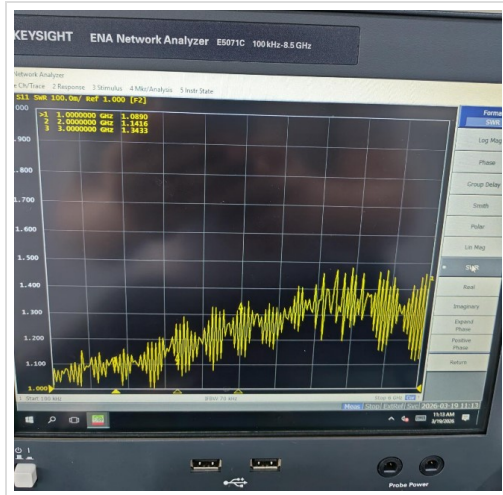

Contact Resistance Test

Contact Type	Female Pin
Center Contact Resistance	≅ 10 MΩ (Milliohms Max.)
Outer Contact Resistance	≅ 5 MΩ (Milliohms Max.)



Working Voltage & Insulation Resistance Test

Insulation Resistance	≥1000MΩ
-----------------------	---------



Version History

REV	Date	Revise Contents	Drafter	Approver
A.0	2026.4.13	The initial formulation	Esther	Joson

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.