

F Type Connector Straight Jack Panel Mount Bulkhead - RHT-611-0023



Drawing

1	2		3		4		5		6																																																																																						
A	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2">Product NO.</td> <td colspan="4">Renhotec-611-0023</td> </tr> <tr> <td>REV</td> <td>DESCRIPTION</td> <td>DWN</td> <td>DATE</td> <td colspan="2">APPROVEN</td> </tr> <tr> <td>A</td> <td>First issue</td> <td>Mr. chen</td> <td>2016/3/16</td> <td colspan="2">John kine</td> </tr> </table>										Product NO.		Renhotec-611-0023				REV	DESCRIPTION	DWN	DATE	APPROVEN		A	First issue	Mr. chen	2016/3/16	John kine																																																																				
Product NO.		Renhotec-611-0023																																																																																													
REV	DESCRIPTION	DWN	DATE	APPROVEN																																																																																											
A	First issue	Mr. chen	2016/3/16	John kine																																																																																											
B																																																																																															
C	<p>SPECIFICATIONS: Impedance: 75 Ohms Frequency Range: DC~3G VSWR: 30dB Return loss @ 1GHZ Working Voltage: 15 watts continuous Insulation Resistance: 5000 Ohms min Temperature Range: -40°C TO +60°C Drawings products are in line with ROHS standards</p>																																																																																														
D	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>1</td> <td>Body</td> <td>Brass</td> <td>NI:80-120u"</td> <td rowspan="4">NOTE:</td> <td rowspan="4">Tolerance</td> <td>0-6</td> <td>±0.10</td> <td rowspan="4"> RENHOTECH GROUP www.renhotec.com </td> </tr> <tr> <td>2</td> <td>Insulator</td> <td>PP</td> <td>White</td> <td>6-30</td> <td>±0.20</td> </tr> <tr> <td>3</td> <td>Center contact</td> <td>Phosphor</td> <td>Gold</td> <td>30-120</td> <td>±0.30</td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td>Angular</td> <td>±2°</td> </tr> <tr> <td colspan="4"></td> <td>DRAWN</td> <td>2016/03/16</td> <td colspan="2">View</td> <td rowspan="2">Name: F Jack CONNECTOR</td> </tr> <tr> <td colspan="4"></td> <td>CHECKED</td> <td></td> <td colspan="2">UNIT</td> <td>SIZE A</td> </tr> <tr> <td colspan="4"></td> <td>APPROVALS</td> <td></td> <td colspan="2">SCALE</td> <td>Product NO. RENHOTECH-611-0023</td> </tr> <tr> <td colspan="4"></td> <td>John Kine</td> <td>16/03/2016</td> <td colspan="2">1:1</td> <td>Date/time</td> </tr> <tr> <td colspan="1">NO</td> <td colspan="1">Component Number</td> <td colspan="1">Material</td> <td colspan="1">Finish</td> <td colspan="1"></td> <td colspan="1"></td> <td colspan="1"></td> <td colspan="1"></td> <td colspan="1">2016/ 3/ 16</td> <td colspan="1">CAD FILE</td> <td colspan="1">SHEET: 1 OF 1</td> </tr> <tr> <td colspan="1" style="text-align: center;">E</td> <td colspan="1" style="text-align: center;">1</td> <td colspan="2" style="text-align: center;">2</td> <td colspan="2" style="text-align: center;">3</td> <td colspan="2" style="text-align: center;">4</td> <td colspan="2" style="text-align: center;">5</td> <td colspan="1" style="text-align: center;">6</td> </tr> </table>										1	Body	Brass	NI:80-120u"	NOTE:	Tolerance	0-6	±0.10	RENHOTECH GROUP www.renhotec.com	2	Insulator	PP	White	6-30	±0.20	3	Center contact	Phosphor	Gold	30-120	±0.30	4				Angular	±2°					DRAWN	2016/03/16	View		Name: F Jack CONNECTOR					CHECKED		UNIT		SIZE A					APPROVALS		SCALE		Product NO. RENHOTECH-611-0023					John Kine	16/03/2016	1:1		Date/time	NO	Component Number	Material	Finish					2016/ 3/ 16	CAD FILE	SHEET: 1 OF 1	E	1	2		3		4		5		6
1	Body	Brass	NI:80-120u"	NOTE:	Tolerance	0-6	±0.10	RENHOTECH GROUP www.renhotec.com																																																																																							
2	Insulator	PP	White			6-30	±0.20																																																																																								
3	Center contact	Phosphor	Gold			30-120	±0.30																																																																																								
4						Angular	±2°																																																																																								
				DRAWN	2016/03/16	View		Name: F Jack CONNECTOR																																																																																							
				CHECKED		UNIT			SIZE A																																																																																						
				APPROVALS		SCALE		Product NO. RENHOTECH-611-0023																																																																																							
				John Kine	16/03/2016	1:1		Date/time																																																																																							
NO	Component Number	Material	Finish					2016/ 3/ 16	CAD FILE	SHEET: 1 OF 1																																																																																					
E	1	2		3		4		5		6																																																																																					

Basic Information

Connector Type	Jack
Fastening Type	3/8-32 Threaded
Mounting Feature	Bulkhead
Mounting Type	Panel Mount
Orientation	Straight
RF Series	F Type

Mechanical Specification

Contact Retention	20 in-lbs min.
Contact Termination Style	Solder
Mating Durability	≥ 500 Cycles

Environmental Specification

Temperature Range	-40°C to +140°C
--------------------------	-----------------

Material and Finish


Component Description	Material	Finish
Shell	Copper Alloy	Nickel Plated
Insulator	Polypropylene	
Center Contact	Brass	Tin Plated

Impedance Testing

Impedance	75 ohm
-----------	--------

Frequency & VSWR Test Report

Frequency Range	DC-1GHz
VSWR	R/A type ≤ 1.3MAX, Straight type ≤ 1.2 MAX

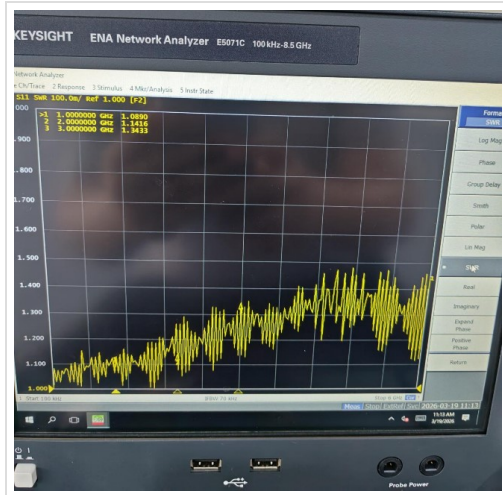

Contact Resistance Test

Contact Type	Female Pin
Center Contact Resistance	≅ 10 MΩ (Milliohms Max.)
Outer Contact Resistance	≅ 5 MΩ (Milliohms Max.)



Working Voltage & Insulation Resistance Test

Insulation Resistance	≥1000MΩ
-----------------------	---------



Version History

REV	Date	Revise Contents	Drafter	Approver
A.0	2026.4.13	The initial formulation	Esther	Joson

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.