
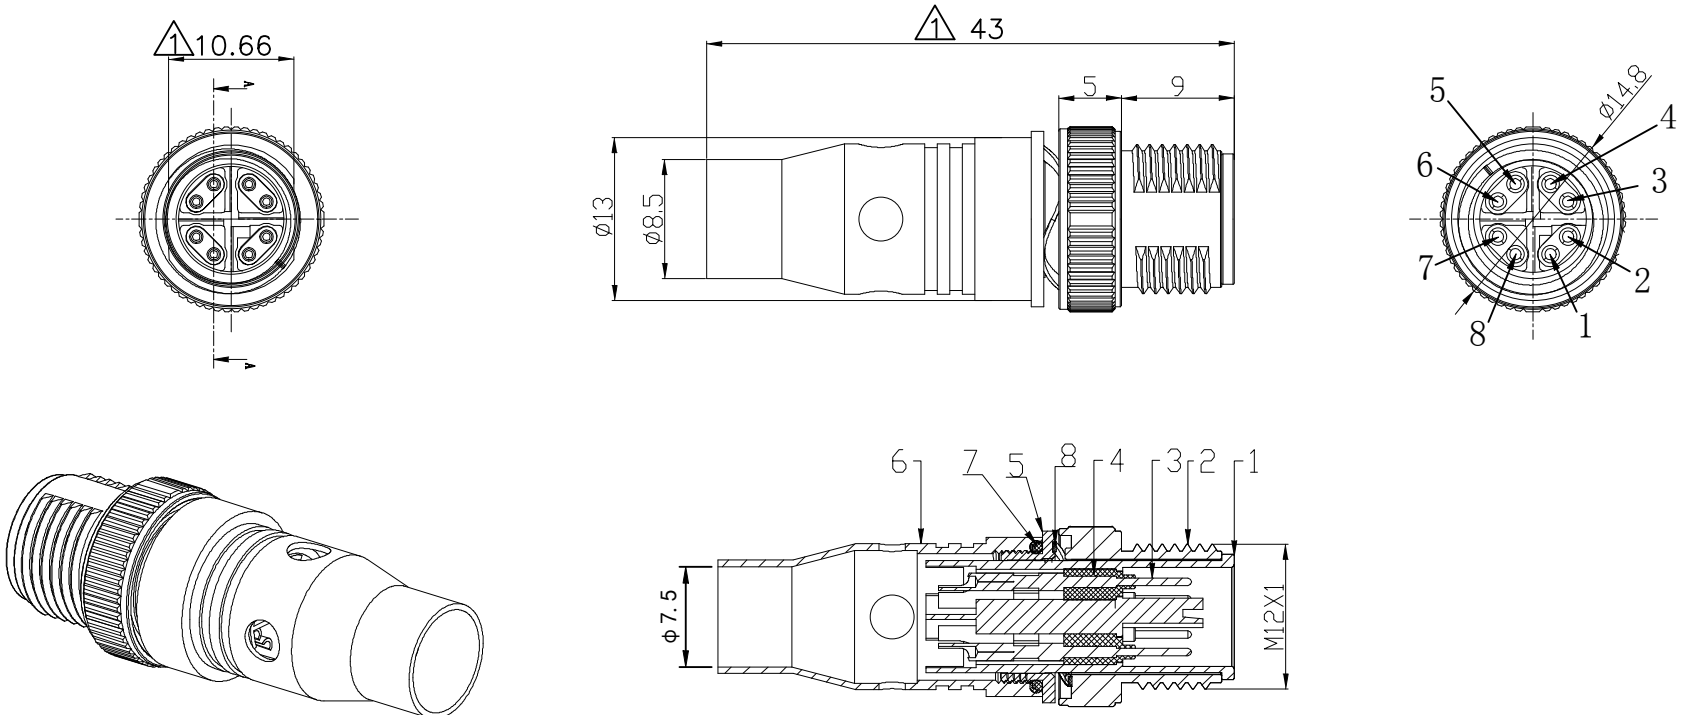


Product NO.		RHT-634-1194			
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN	
First	First issue	Gavin	2018/12/04	JIM. KING	
R1.0	Change dimensions	Ding	2024/09/13	JIM. KING	



- Echnical Oarameters
- 1.Flame retardant grade: V0.
 - 2.frequency of plug: ≥ 100 times
 - 3.salt fog: 48 hours
 - 4.Operating temperature:-25℃~+85℃
 - 5.Operating voltage: DC 60V AC 50V
 - 6.Current: 0.5A
 - 7.Connector protection rating: IP67 Grade
 - 8.Material meets ROHS requirements
 - 9.Transmission speed: 10G bit/s
 - 10.Bandwidth requirements: CAT6A

-TOLERANCES- UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm $\pm$ 0.20mm 8 - 30mm $\pm$ 0.25mm 30 -120mm $\pm$ 0.30mm	 RENHOTECH GROUP					
			PART DESCRIPTION: M12 8P X Code MALE CONNECTOR			
	Appr: JIM. KING		P/N: RHT-634-1194			
	Check:	Date	Scale	Unit	Type	Page
Draw: Gavin		2018.12.04	Free	MM	Z	1/1