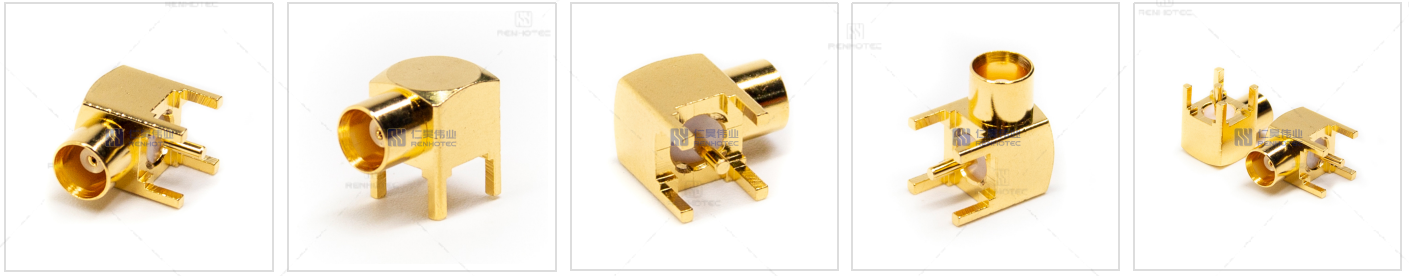

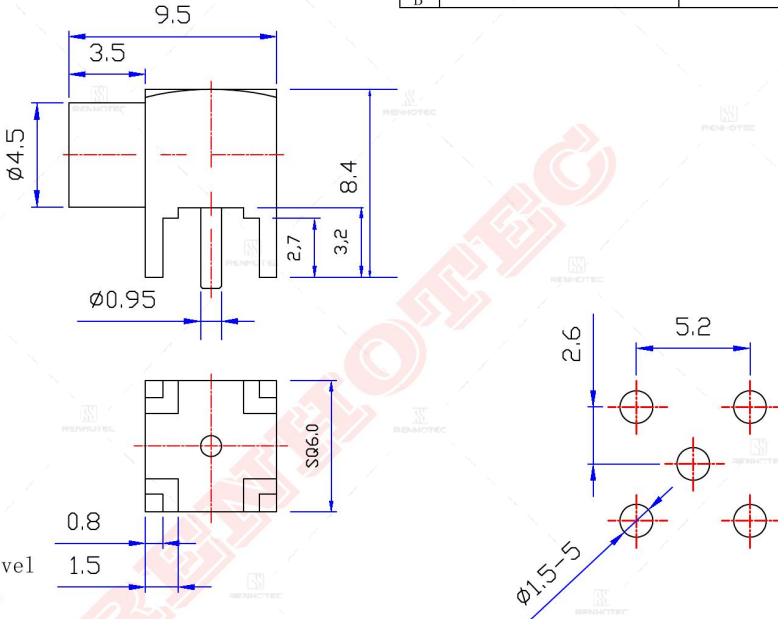





MCX Connector Jack Solder Panel Mount Through Hole - RHT-617-0020



Drawing

				Product No. DOSIN-809-0046																																																																	
				REV	DESCRIPTION	DWN	DATE	APPROVEN																																																													
1	A	B	C	D	E	F																																																															
2					<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>A</td> <td>First issue</td> <td>Mr. CHEN</td> <td>2018/01/11</td> <td>John kine</td> </tr> <tr> <td>B</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		A	First issue	Mr. CHEN	2018/01/11	John kine	B																																																									
A					First issue	Mr. CHEN	2018/01/11	John kine																																																													
B																																																																					
3	<p>Specifications</p> <p>Impedance: 50 Ohms Frequency Range: 0~6Ghz VSWR: 1.25max Working Voltage: <170 V rms @ sea level Insulation Resistance: 5000 Ohms min Temperature Range: -55°C TO +155°C Drawings products are in line with ROHS standards</p>				<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>Tolerance</td> <td>X. X ±0.10 X. X ±0.08 X. XX ±0.05 Angular ±5°</td> </tr> <tr> <td>View</td> <td></td> </tr> <tr> <td>UNIT</td> <td>MM</td> </tr> <tr> <td>SCALE</td> <td>1:1</td> </tr> </table>		Tolerance	X. X ±0.10 X. X ±0.08 X. XX ±0.05 Angular ±5°	View		UNIT	MM	SCALE	1:1																																																							
Tolerance					X. X ±0.10 X. X ±0.08 X. XX ±0.05 Angular ±5°																																																																
View																																																																					
UNIT	MM																																																																				
SCALE	1:1																																																																				
4	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>1</td> <td>Body</td> <td>Brass</td> <td>AU:1u"</td> <td>1</td> <td rowspan="10"> NOTE: DRAWN Zelin.CHEN CHECKED APPROVALS John </td> </tr> <tr> <td>2</td> <td>Insulation</td> <td>Teflon</td> <td>White</td> <td>1</td> </tr> <tr> <td>3</td> <td>Pin</td> <td>Phosphor</td> <td>AU:3u"</td> <td>1</td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>NO</td> <td>Component Number</td> <td>Material</td> <td>Finish</td> <td>QTY</td> <td></td> </tr> </table>				1	Body	Brass	AU:1u"	1	NOTE: DRAWN Zelin.CHEN CHECKED APPROVALS John	2	Insulation	Teflon	White	1	3	Pin	Phosphor	AU:3u"	1	4					5					6					7					8					9					10					NO	Component Number	Material	Finish	QTY		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2">Name: MCX JACK PCB</td> </tr> <tr> <td>SIZE A</td> <td>Product NO. RHT-617-0020</td> </tr> <tr> <td>Date Time 2018/01/11</td> <td>CAD FILE D/company drawings/BD</td> </tr> </table>		Name: MCX JACK PCB		SIZE A	Product NO. RHT-617-0020	Date Time 2018/01/11	CAD FILE D/company drawings/BD
1					Body	Brass	AU:1u"	1	NOTE: DRAWN Zelin.CHEN CHECKED APPROVALS John																																																												
2	Insulation	Teflon	White	1																																																																	
3	Pin	Phosphor	AU:3u"	1																																																																	
4																																																																					
5																																																																					
6																																																																					
7																																																																					
8																																																																					
9																																																																					
10																																																																					
NO	Component Number	Material	Finish	QTY																																																																	
Name: MCX JACK PCB																																																																					
SIZE A	Product NO. RHT-617-0020																																																																				
Date Time 2018/01/11	CAD FILE D/company drawings/BD																																																																				
5	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2">RENHOTEC GROUP</td> </tr> <tr> <td colspan="2">www.renhotec.com</td> </tr> </table>				RENHOTEC GROUP		www.renhotec.com		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>REV B</td> <td>SHEET: 1 OF 1</td> </tr> </table>		REV B	SHEET: 1 OF 1																																																									
RENHOTEC GROUP																																																																					
www.renhotec.com																																																																					
REV B	SHEET: 1 OF 1																																																																				
6	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td colspan="2">RENHOTEC GROUP</td> </tr> <tr> <td colspan="2">www.renhotec.com</td> </tr> </table>				RENHOTEC GROUP		www.renhotec.com		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td>REV B</td> <td>SHEET: 1 OF 1</td> </tr> </table>		REV B	SHEET: 1 OF 1																																																									
RENHOTEC GROUP																																																																					
www.renhotec.com																																																																					
REV B	SHEET: 1 OF 1																																																																				
	A	B	C	D	E	F																																																															

Basic Information

Connector Type	Jack
Mounting Feature	Through Hole
Mounting Type	Panel Mount
Number of Ports	1
Orientation	Right Angle
Fastening Type	Push-Pull

Mechanical Specification

Contact Termination Style	Solder
Mating Durability	≥ 500 Cycles

Material Specification

Shield Termination	Solder
--------------------	--------

Environmental Specification

Temperature Range	-65°C to +165°C
Corrosion Resistance	MIL-STD-202 Meth. 101
Vibration	MIL-STD-202 Meth. 204

Material and Finish

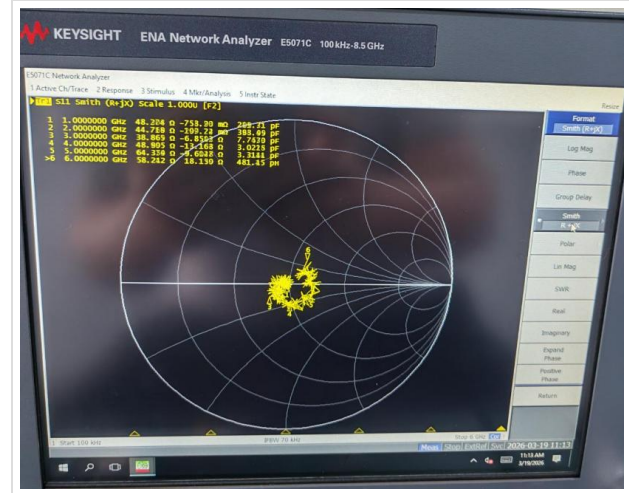
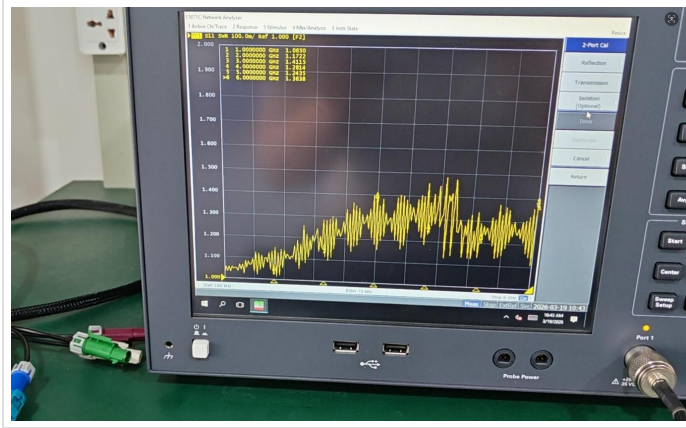
Component Description	Material	Finish
Shell	Copper Alloy	Gold Plated
Insulator	Teflon White	
Center Contact	Brass	Gold Plated

Impedance Testing

Impedance	50 ohm
-----------	--------

Frequency & VSWR Test Report

Frequency Range	6GHz
VSWR	≤1.15 (DC to 4 GHz), ≤1.40 (4 to 6 GHz)



Contact Resistance Test

Contact Type	Female Pin
Center Contact Resistance	5 MΩ Min
Outer Contact Resistance	1 MΩ Min



Working Voltage & Insulation Resistance Test

Rated Voltage	500 Volts RMS Max Continuous
Dielectric Withstanding Voltage	1000 VRMS Max
Insulation Resistance	500MΩ Min



Version History

REV	Date	Revise Contents	Drafter	Approver
A.0	2026.5.13	The initial formulation	Esther	Joson

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.