

Waterproof N Type Jack Straight Crimp Type Cable RG58 50ohm - RHT-614-0190



Drawing

<div style="display: flex; justify-content: space-between;"> <div style="width: 30%;"> <p>Specifications Impedance: 50 Ohms Frequency Range:0-6G VSWR:1.5MAX Working Voltage:1000 VRMS(max at sea level) Dielectric Withstanding Voltage:1500 vrms(max at sea level) Insulation Resistance:5000 Ohms min Durability Mating:500 Cycles min Temperature Range:-65°C TO +165°C</p> </div> <div style="width: 60%;"> <p>Product No. RHT-614-0190</p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>REV</th> <th>DESCRIPTION</th> <th>DWN</th> <th>DATE</th> <th>APPROVEN</th> </tr> <tr> <td>A</td> <td>First issue</td> <td>Gavin</td> <td>2018/03/12</td> <td>JIM.KING</td> </tr> </table> </div> </div>					REV	DESCRIPTION	DWN	DATE	APPROVEN	A	First issue	Gavin	2018/03/12	JIM.KING																															
REV	DESCRIPTION	DWN	DATE	APPROVEN																																									
A	First issue	Gavin	2018/03/12	JIM.KING																																									
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>NO</th> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>FINISH</th> <th>QTY</th> </tr> <tr> <td>7</td> <td>CASING</td> <td>BRASS</td> <td>NICKEL</td> <td>1</td> </tr> <tr> <td>6</td> <td>NUT</td> <td>BRASS</td> <td>NICKEL</td> <td>1</td> </tr> <tr> <td>5</td> <td>GASKET</td> <td>BRASS</td> <td>NICKEL</td> <td>1</td> </tr> <tr> <td>4</td> <td>O-RING</td> <td>RUBBER</td> <td>RED</td> <td>1</td> </tr> <tr> <td>3</td> <td>PIN</td> <td>BRASS</td> <td>GOLD</td> <td>1</td> </tr> <tr> <td>2</td> <td>INSUKATON</td> <td>PTFE</td> <td>WHITE</td> <td>1</td> </tr> <tr> <td>1</td> <td>BODY</td> <td>BRASS</td> <td>NICKEL</td> <td>1</td> </tr> </table>			NO	DESCRIPTION	MATERIAL	FINISH	QTY	7	CASING	BRASS	NICKEL	1	6	NUT	BRASS	NICKEL	1	5	GASKET	BRASS	NICKEL	1	4	O-RING	RUBBER	RED	1	3	PIN	BRASS	GOLD	1	2	INSUKATON	PTFE	WHITE	1	1	BODY	BRASS	NICKEL	1	<p>RENHOTECH RENHOTECH GROUP</p> <p>Appd: JIM.KING P/N: RHT-614-0190</p> <p>Check: _____ Date: _____ Scale: _____ Unit: _____ Type: _____ Page: _____</p> <p>Draw: Gavin 2018/03/12 Free MM Z 1/1</p>		
NO	DESCRIPTION	MATERIAL	FINISH	QTY																																									
7	CASING	BRASS	NICKEL	1																																									
6	NUT	BRASS	NICKEL	1																																									
5	GASKET	BRASS	NICKEL	1																																									
4	O-RING	RUBBER	RED	1																																									
3	PIN	BRASS	GOLD	1																																									
2	INSUKATON	PTFE	WHITE	1																																									
1	BODY	BRASS	NICKEL	1																																									
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:15%;"></td> <td style="width:15%;"></td> <td style="width:15%;"></td> <td style="width:15%;"></td> <td style="width:15%;"></td> <td style="width:15%;"></td> </tr> </table>																																													

Basic Information

Cable Type	RG58
Connector Type	Jack
Contact Termination Style	Crimp
Fastening Type	Threaded
Features	Waterproof
Mounting Type	Cable Mount
Number of Ports	1
Orientation	Straight
Shield Termination	Crimp

Mechanical Specification

Contact Retention	6 lbs min.
Coupling Nut Retention	30 in-lbs. MIN
Mating Durability	≥ 500 Cycles

Environmental Specification

Corrosion Resistance	MIL-STD-202 Meth. 101
Ingress Protection	IP65
Operating Temperature	-65°C to +165°C
Vibration	MIL-STD-202 Meth. 204

Electrical Specification

Dielectric Withstanding Voltage	2500 V rms
Withstand Voltage	1500V RMS Max

Material and Finish


Component Description	Material	Finish
Shell	Copper Alloy	Nickel Plated
Insulator	Teflon White	
Contact	Brass	Gold Plated

Impedance Testing

Impedance	50Ω
------------------	-----

Frequency & VSWR Test Report

Frequency Range	DC-11 GHz
VSWR	R/A type ≤ 1.5 MAX

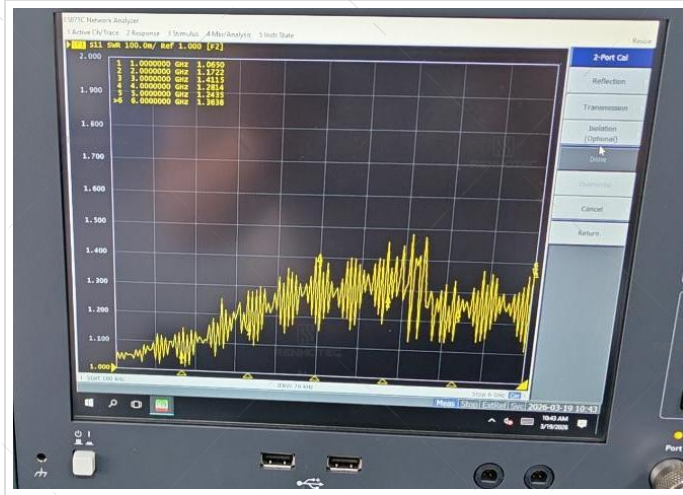

Contact Resistance Test

Contact Type	Female Pin
Center Contact Resistance	≤ 1.0 M Ω (Milliohms Max.)
Outer Contact Resistance	≤ 0.2 M Ω (Milliohms Max.)



Working Voltage & Insulation Resistance Test

Working Voltage	1000 V rms
Insulation Resistance	$\geq 5 \times 10^3 M\Omega$ (Megohms MIN.)



Version History

REV	Date	Revise Contents	Drafter	Approver
A.0	2026.6.18	The initial formulation	Esther	Joson

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.