


**N Type Connector Male Straight Clamp Cable Type 50ohm - RHT-614-0211**



**Drawing**

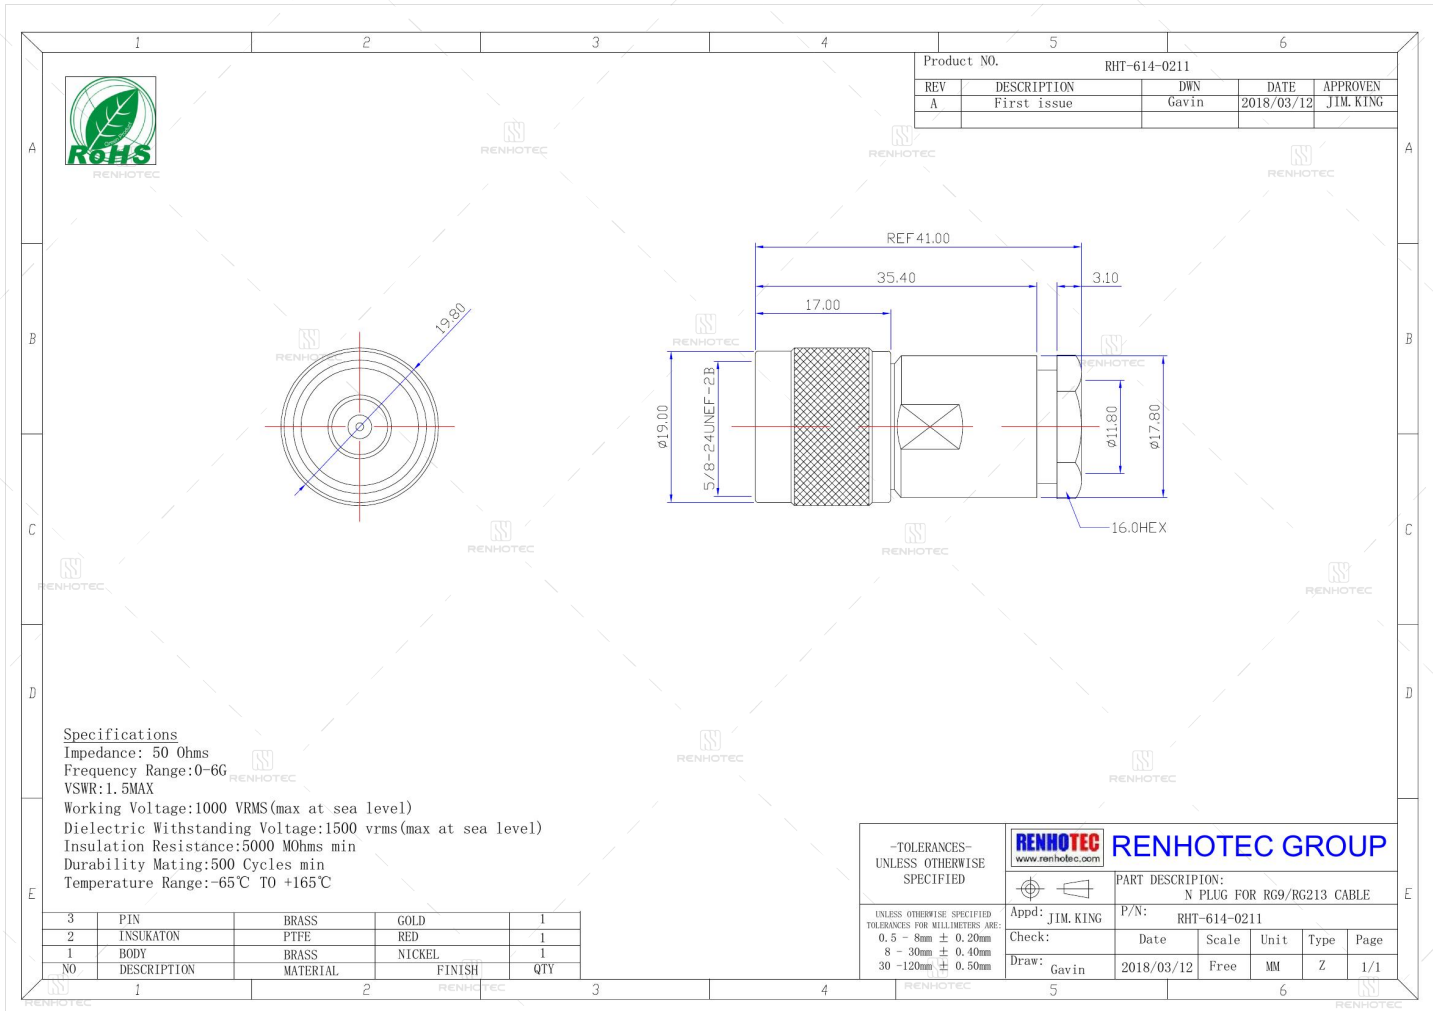

**Basic Information**

<b>Connector Type</b>	Plug
<b>Fastening Type</b>	Threaded
<b>Mounting Type</b>	Cable Mount
<b>Number of Ports</b>	1
<b>Orientation</b>	Straight
<b>Shield Termination</b>	Clamp

**Mechanical Specification**

<b>Contact Retention</b>	6 lbs min.
<b>Coupling Nut Retention</b>	30 in-lbs. MIN
<b>Mating Durability</b>	≥ 500 Cycles

**Environmental Specification**

<b>Corrosion Resistance</b>	MIL-STD-202 Meth. 101
<b>Ingress Protection</b>	IP65
<b>Operating Temperature</b>	-65°C to +165°C
<b>Vibration</b>	MIL-STD-202 Meth. 204

**Electrical Specification**

<b>Dielectric Withstanding Voltage</b>	2500 V rms
<b>Withstand Voltage</b>	1500V RMS Max

**Material and Finish**



Component Description	Material	Finish
Shell	Copper Alloy	Nickel Plated
Insulator	Teflon White	
Contact	Brass	Gold Plated

**Impedance Testing**

<b>Impedance</b>	50Ω
------------------	-----

**Frequency & VSWR Test Report**

Frequency Range	DC-11 GHz
VSWR	R/A type ≤ 1.5MAX, Straight type ≤ 1.3 MAX

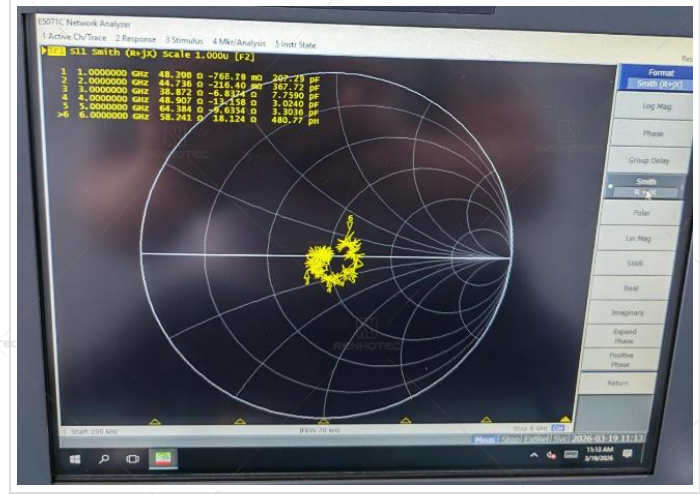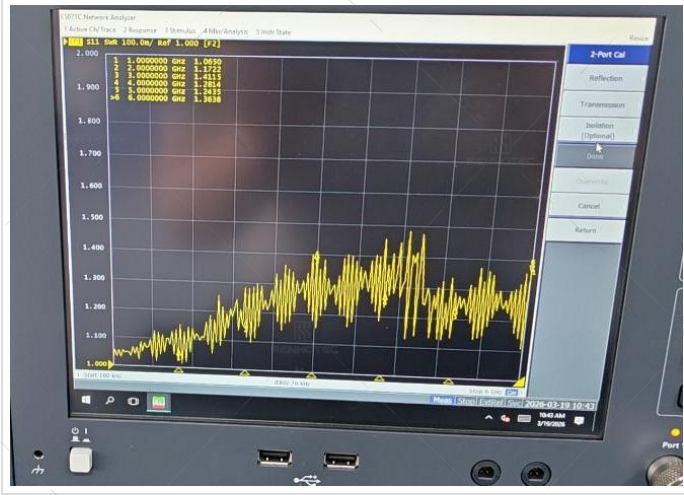

**Contact Resistance Test**

Contact Type	Male Pin
Center Contact Resistance	≅ 1.0 MΩ (Milliohms Max.)
Outer Contact Resistance	≅ 0.2 MΩ (Milliohms Max.)



**Working Voltage & Insulation Resistance Test**

Working Voltage	1000 V rms
Insulation Resistance	$\geq 5 \times 10^3 M\Omega$ (Megohms MIN.)



**Version History**

REV	Date	Revise Contents	Drafter	Approver
A.0	2026.6.18	The initial formulation	Esther	Joson

**Disclaimer**

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.