



OHS series bayonet ultra-small connector shell size 14 10 pin male bulkhead socket, PCB terminal - OHS-BC-1-10/14-BL1-1B

Part Number:

**OHS-BC-1-10/14-BL1-1B**



### Basic Information

Connector Type	Receptacle
Contact Size	Φ1.0mm
Contact Type	Male
Number of Positions	10 Pin
Shell Size	14

### Compatible Part Numbers

English P/N	ONTs-BS-1-10/14 V1-1-V
-------------	------------------------

### Material Specification

Contact Material	Copper alloy gold/silver plated
Insulator	Bakelite
Shell Material	Aluminum Alloy, anodized


### Electrical Specification

Contact Resistance	≤5MΩ
Insulation Resistance	≥1000MΩ
Maximum current per contact	3.0A
Number of Insertions and Removals	250
Operating Voltage	250
Sum of Currents	30A


### Environmental Specification

Operating Temperature	-60°C – +85°C
-----------------------	---------------

### Contact Layout



### Size

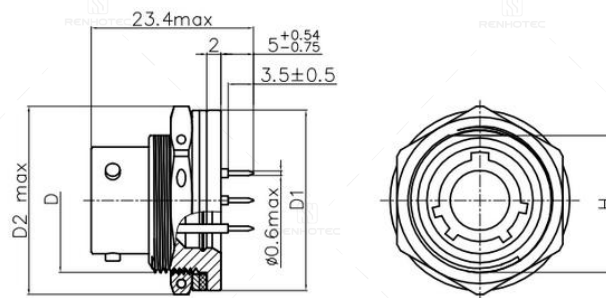

PIN / SHELL SIZE	D	D1	D2	H
4/10	M18×0.75	24	25.4	17
7/12	M20×0.75	25	27.8	19
10/14	M22×0.75	28	31.2	21
19/18	M24×0.75	31	31.2	23
32/22	M30×0.75	35	37.0	29
50/27	M33×0.75	40	41.6	32

**How to Order**

OHS	BC	1 (2)	4/10	B(P)	1(2)	1(2,3)	B
OHS	Series						
B	Bayonet						
C	ultra-small circular						
1 Silver Plated ; 2 Golded Plated							
Contacts/Shell Size							
B Socket (Male)							
BL Bulkhead Socket PCB (Male)							
P Plug (Female)							
1. Without tail attachment 12. With plastic tail attachment							
Key position							
All-climate version							

**Disclaimer**

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.