

RENHOTEC



Renhotec.com



Product Catalogue



Renhotec-Industrial.com



RENHOTEC



RENHOTEC

OHS SERIES

PRODUCT OVERVIEW



RENHOTEC



RENHOTEC



RENHOTEC



RENHOTEC



RENHOTEC



RENHOTEC

RENHOTEC GROUP LIMITED

☎ : 86-027-81296316

🌐 : www.renhotec.com ✉ : info@renhotec.com

Headquarters(Wuhan): No.555 Wenhua Avenue, Hongshan District,Wuhan 430074, China

Factory(Dongguan): No.25 Ningjiang Road, Humen Town,Dongguan City Guangdong Province, China

Factory(jiangmen): Building 5, Wanyang Zhongchuang City,Daze Industrial Park, Jiangmen City, Guangdong Province, China

RENHOTEC
GROUP LIMITED



RENHOTEC



RENHOTEC



RENHOTEC

OHS series bayonet ultra-small connectors

OHS series bayonet ultra-small connectors mainly adopt Russian connector technology. This type of connector is widely used in DC and AC circuits of various electrical, radio and control instruments. It consists of plugs and sockets, with multi-level key positions for installation. The coupling mode of the connector is bayonet type. The socket has no tail attachment and the plug has a straight plastic tail attachment. At the same time, it can be matched and interchanged with the original parts of the Russian O H $\sqcup$ series.

Technical Performance

Contact resistance: $\leq 5m\Omega$ Vibration: 1-5000H_z 20g
Insulation resistance: $\geq 1000M\Omega$ (Normal) Contact OD: $\varnothing 1.0mm$
Ambient Temperture: -60℃ - 200℃

working current,working voltage:

Shell Size	Contacts	Maximum current per single contact, A	Total Current(A)	Operating voltage(V)
10	4	3.7	15	250
12	7	3.1	22	250
14	10	3.0	30	250
18	19	2.1	40	250
22	32	1.8	60	250
27	50	1.5	75	250



Life span: 250 Times, 15,000 hours operating time
Technical conditions: 5PO.364.030TV

Shell Size	10	12	14	18
Contacts	4	7	10	19
Pin-out Arrangements				
Shell Size	22	27		
Contacts	32	50		
Pin-out Arrangements				




OHS series bayonet ultra-small connectors

How To Order

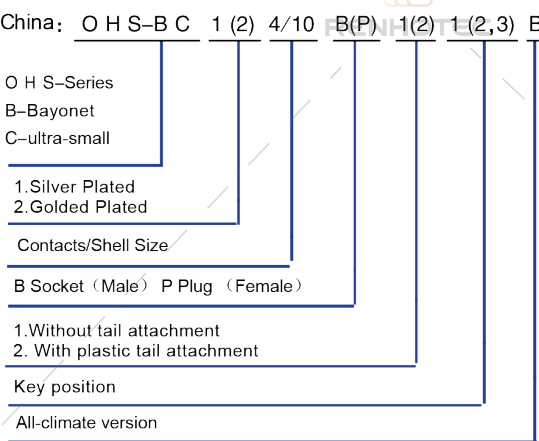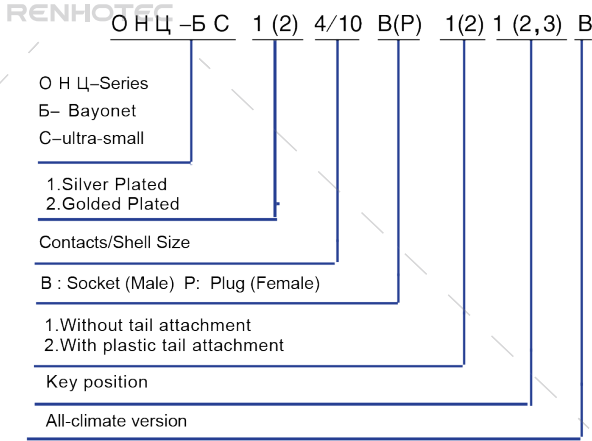


Appearance And Inst Allation Dimensions

Socket without Tail Attachments (Male)

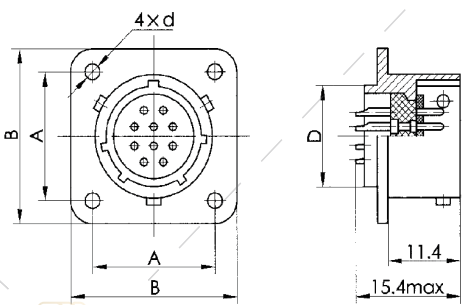

Plug with tail attachments (Female)

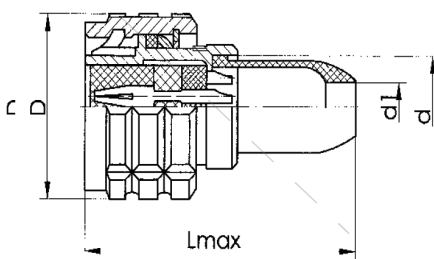

Shell Size	Size(mm)				
	D	d	A	B	b
10	10	2.2	11.8	20	1.4
12	12	2.2	13.2	21	1.4
14	14	2.2	15	24	1.4
18	18	2.2	18	27	1.4
22	22	2.7	21.5	31	1.8
27	27	3.2	26	36	2

Shell Size	Size(mm)			
	D	d	d 1	Lmax
10	20	M10×0.75	4.5	30
12	21	M12×0.75	6	31
14	24	M14×0.75	7	32
18	27	M18×0.75	9.2	33
22	31	M22×0.75	11	34
27	36	M27×0.75	13	36