



HSAutoLink 12 Pin to USB 3.1 Type-C LVDS Cable - RHT-605-20866

Part Number:

RHT-605-20866



basic_information

2nd Contact Type	Male Pin
1st Connector	111146-3080
2nd Connector	USB 3.1 Type-C
Cable Type	(7/0.08T*1P+D(7/0.08T)+AL+MY)*2C+7/0.08T*1P+7/0.08T*4C+65/0.08T*1C+AB(16/9/0.08TC)
Length	Customized


electrical_specification

Impedance	90 ohm
Frequency Range	DC ~ 0.48 GHz
Insulation Resistance	100 MΩ Min

environmental_specification

Temperature Range	-40°C to +105°C
-------------------	-----------------

Drawing

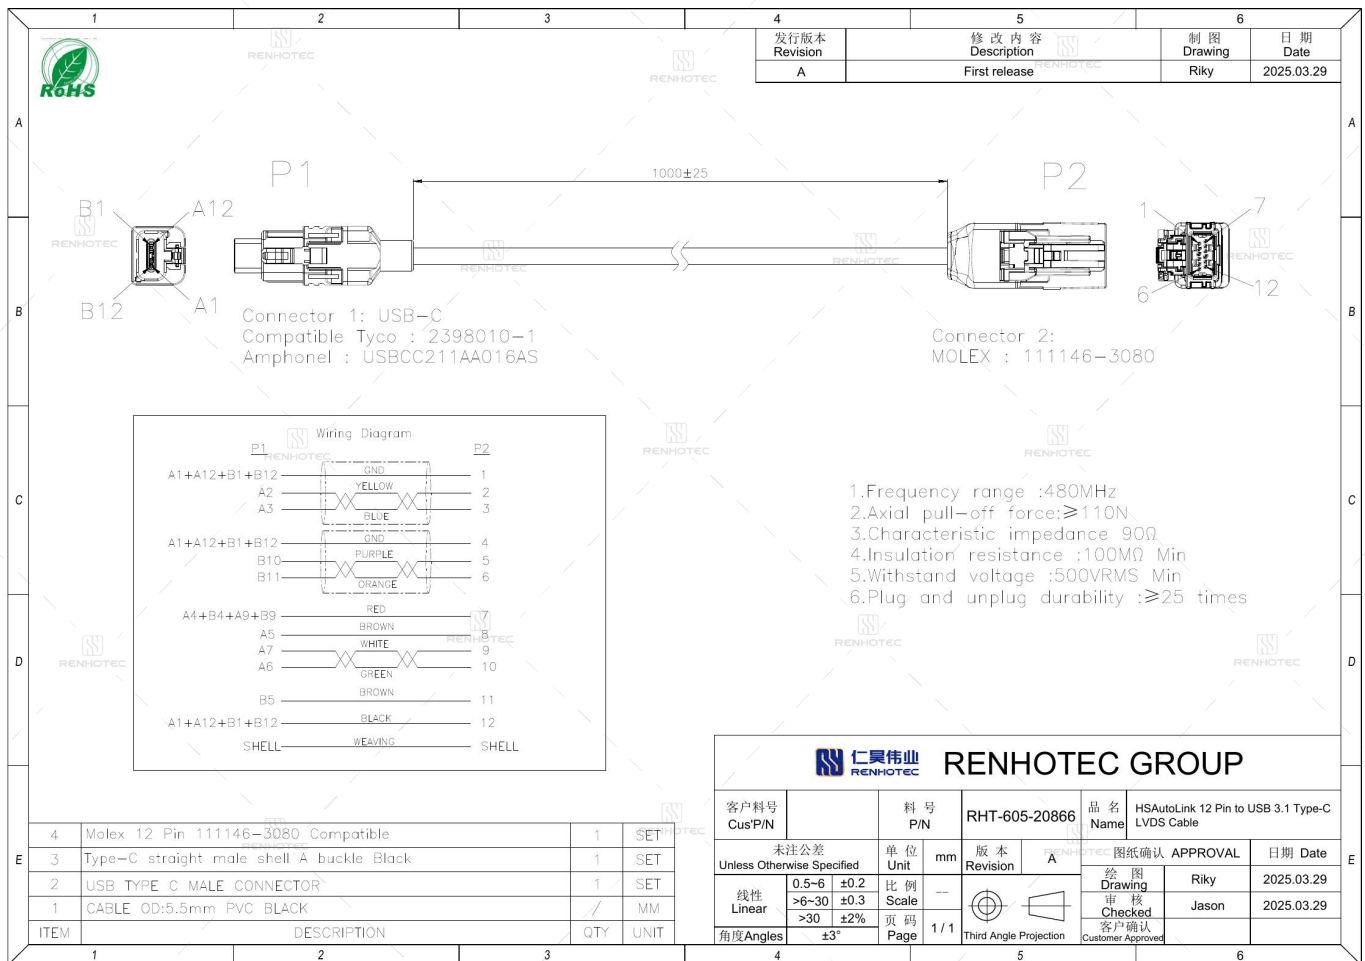

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.