



24V Powered USB Printer Cable to Hosiden 4 Pin + USB-C - RHT-605-20913

Part Number:

**RHT-605-20913**




### basic\_information

|                  |                                                                                 |
|------------------|---------------------------------------------------------------------------------|
| 1st Contact Type | Male Pin                                                                        |
| 1st Connector    | USB 24V                                                                         |
| 2nd Connector    | USB-C+ Din 4 Pin                                                                |
| Cable Type       | UL2464 18#*2C+PVC + UL2725 28#*1P+24#*2C+ADB + UL2725 28#*1P+22#*2C+20#*4C +ADB |
| Length           | Customized                                                                      |

### environmental\_specification

|                   |               |
|-------------------|---------------|
| Temperature Range | -40℃ to +105℃ |
|-------------------|---------------|

## Drawing

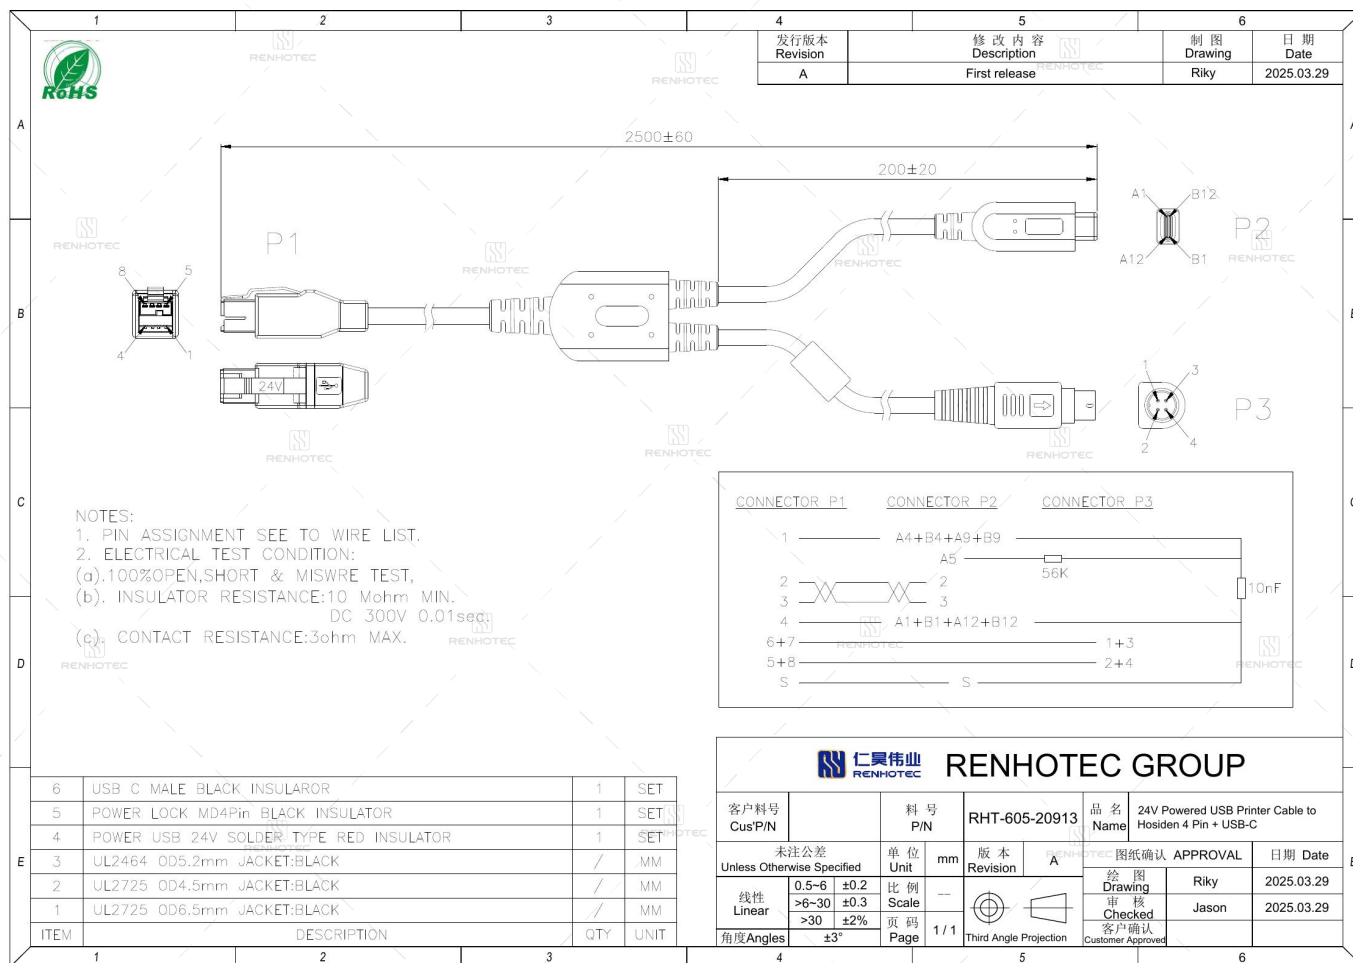

## Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.