



24V Powered USB to Hosiden 3 Pin Cable - RHT-605-20918

Part Number:

**RHT-605-20918**




#### basic\_information

|                  |               |
|------------------|---------------|
| 1st Contact Type | Male Pin      |
| 2nd Contact Type | Male Pin      |
| 1st Connector    | USB 24V       |
| 2nd Connector    | Din 3 Pin     |
| Cable Type       | UL2725 18#*2C |
| Length           | Customized    |

#### environmental\_specification

|                   |                 |
|-------------------|-----------------|
| Temperature Range | -40°C to +105°C |
|-------------------|-----------------|

## Drawing

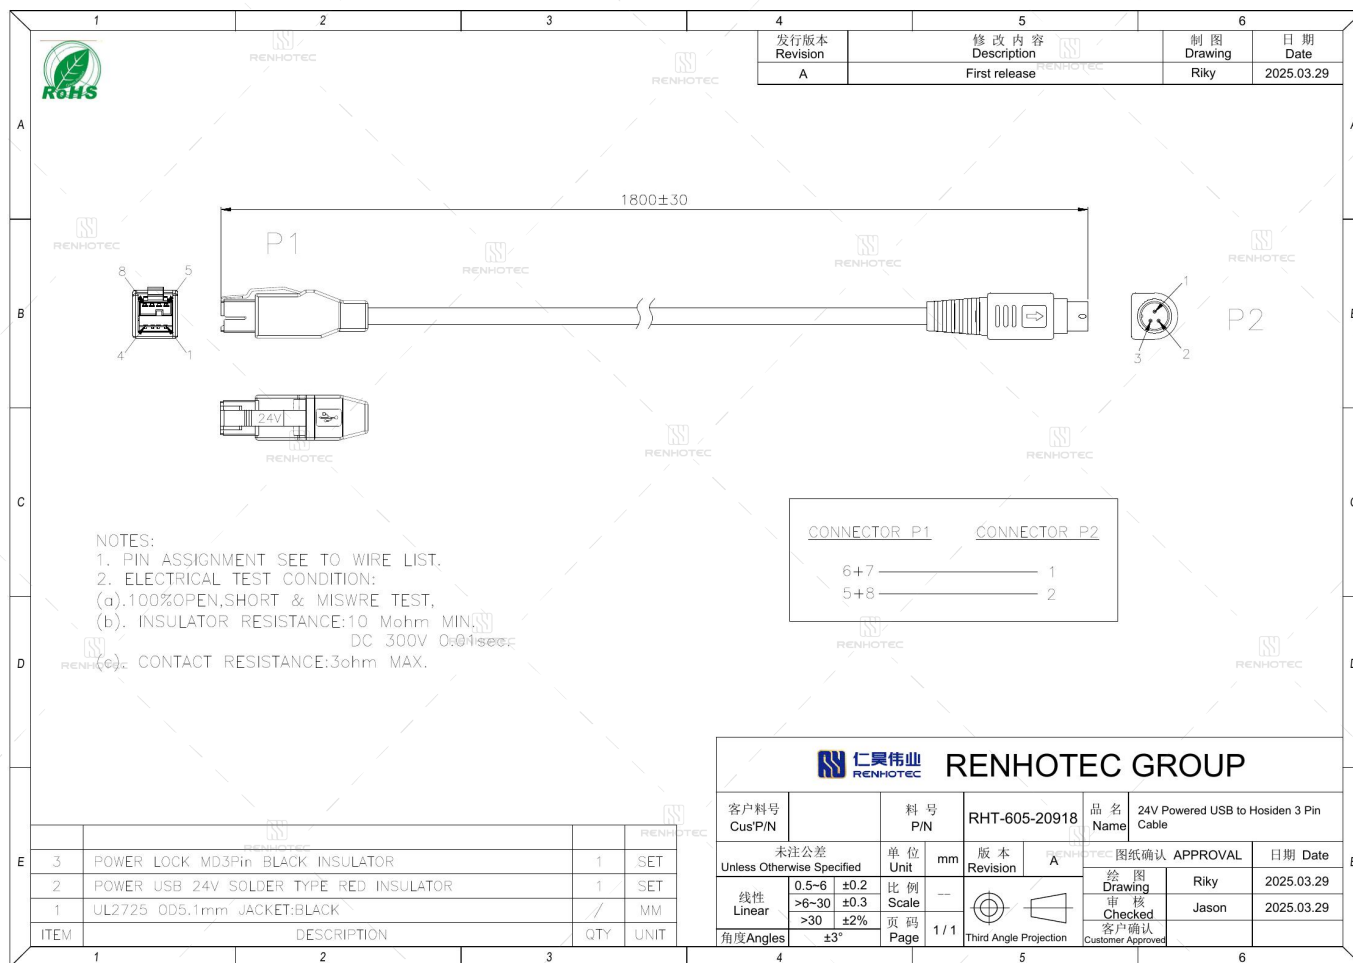

## Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use.  
 Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.