



Push-Pull Circular Connector B Series EEG Socket Connector

Part Number:

EEG.CLL

Basic Information

Contacts	10 Pin, 12 Pin, 14 Pin, 16 Pin, 18 Pin, 19 Pin, 2 Pin, 20 Pin, 22 Pin, 24 Pin, 26 Pin, 3 Pin, 30 Pin, 32 Pin, 4 Pin, 5 Pin, 6 Pin, 7 Pin, 8 Pin, 9 Pin
Gender	Female
Insulator	PEEK
Orientation	Straight
Product Series	00B, 0B, 1B, 2B, 3B, 4B
Termination	Solder

Environmental Specification

Vibration Resistance	10-2000Hz.15g
Disinfection Resistance	-20 times(PSU), >100 times (PPSU), >200 times (PEEK)
Env Experiment	20 / 80 / 21
Environmental Experiment	50 / 175 / 21
Humidity Resistance	Up to 95% at 60 °C
Impact Resistance	100g 6ms
Leakage Rate	< 10-7mbar. L.s-1
Protection Grade	IP50
Corrosion Resistance	> 144h
Shielding Effect	> 80 dB at 1GHz, > 95 dB at 10MHz
Solvent Corrosion Resis	Average (PSU), Good (PPSU), Very Good (PEEK)
Temp Range	- 20 ° C\, + 100 ° C(00 to 1b), - 20 ° C\, + 80 ° C(2b to 5b)
Temperature Range Meta	-55°C ~ +250°C
Temperature Range Plastic	-55°C ~ +150°C (PSU), -55°C ~ +180°C (PPSU), -55°C ~ +250°C (PEEK)

Material Specification

Shell Material


Metal

Mechanical Specification

Durability

> 5000 times


Contact Layout

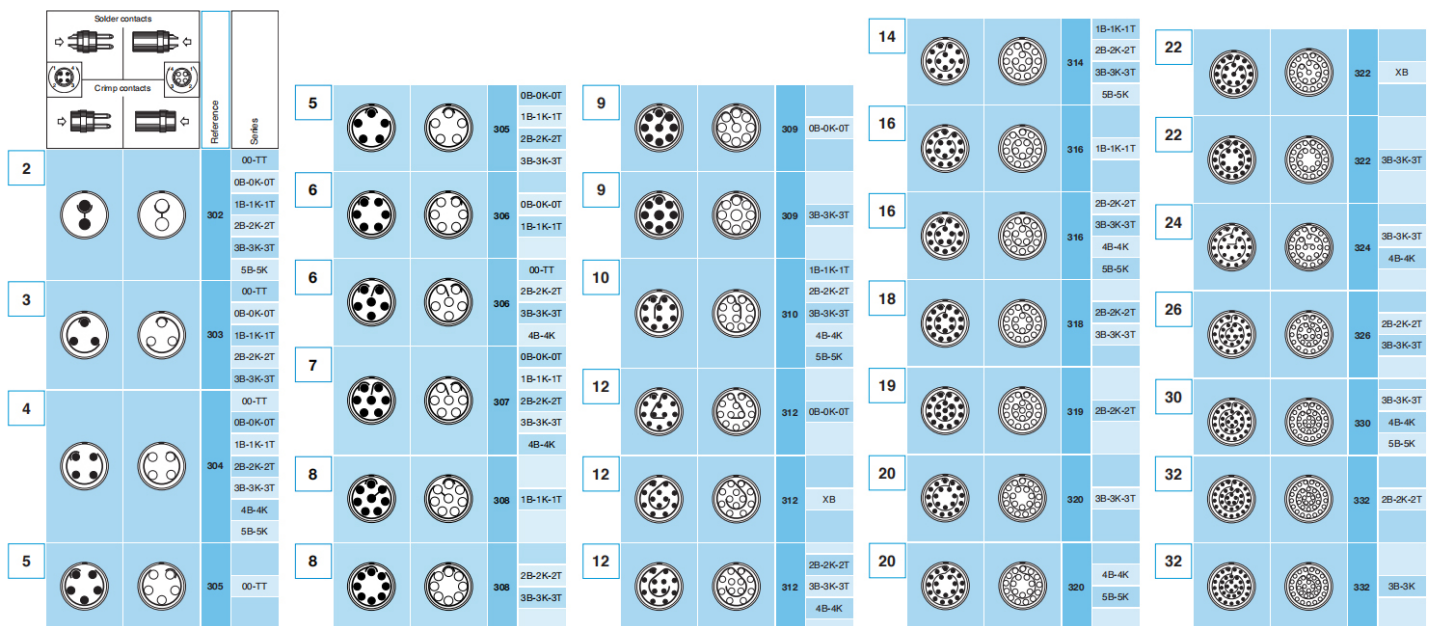

Size

Reference		Dimensions (mm)									
Model	Series	A	B	e	E	L	M	N ¹⁾	P	S1	S2
EEG	00	10	9.5	M7x0.5	2.3	15.5	2.5	13.7	6.0	6.3	7.5
EEG	0B	12	12.5	M9x0.6	2.4	20.7	2.5	19.1	6.3	8.2	9.0
EEG	1B	16	16.0	M12x1.0	6.5	23.0	3.5	21.1	11.0	10.5	13.0
EEG	2B	20	20.0	M15x1.0	4.3	26.7	3.5	24.6	9.0	13.5	15.0
EEG	3B	24	25.0	M18x1.0	6.1	30.7	4.5	28.1	12.0	16.5	20.0
EEG	4B	30	32.1	M25x1.0	10.6	35.7	4.5	34.1	16.5	23.5	26.0
EEG	5B	41	40.0	M35x1.0	13.5	43.5	5.0	39.6	19.5	33.5	38.0

How to Order

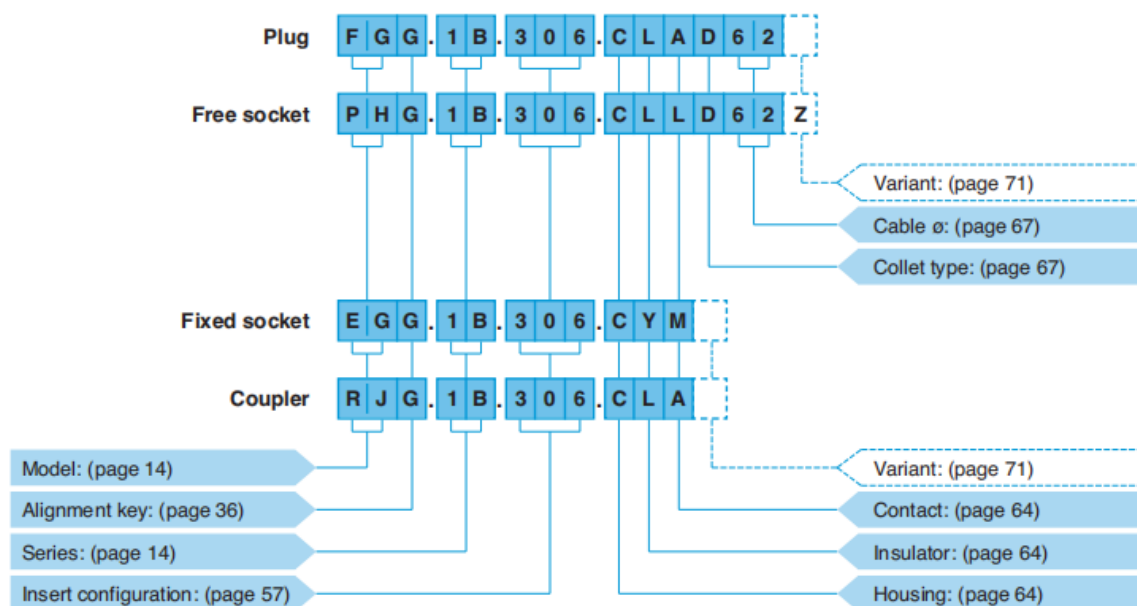

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.